


Thank you for showing your confidence in us by purchasing the BEHRINGER BASS CHORUS BCH100. This ultimate effects pedal is specifically designed to match the range and applications of bass guitars. Thanks to its high-performance features you get super thick chorus with unbelievable stereo effect.

The chorus effect slightly detunes the original signal. A very pleasant detune effect is created relative to the pitch variation. The chorus effect is often used for dispersing signals.

1. CONTROLS

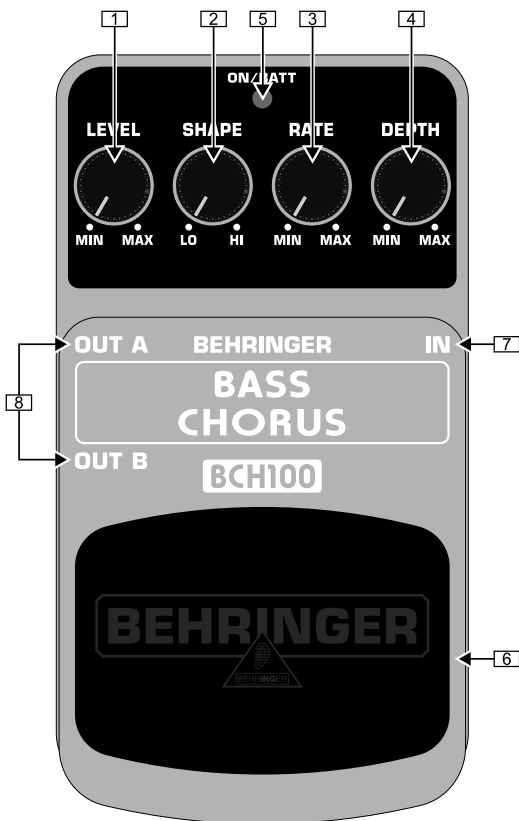


Top view

- 1 The *LEVEL* control adjusts the output level.
- 2 The *SHAPE* control lowers the amount of ultra-low frequencies in the effect signal to achieve more defined tone and avoid muddiness of sound.
- 3 The *RATE* control determines the chorus effect speed.
- 4 Turn up the *DEPTH* control to achieve a more full and deeper effect sound.
- 5 The *ON/BATT* LED illuminates when the effect is activated. It also serves as a battery level indicator.
- 6 Use the footswitch to activate/deactivate the effect.
- 7 Use this 1/4" TS *IN* connector to plug in the instrument cable.
- 8 The two 1/4" TS connectors *OUT A* and *OUT B* send the signal to your amp. Use both connectors if you want to achieve full stereo chorus effect. For mono use just plug in *OUT A*.

Use the *DC IN* connection to plug in a 9 V power supply (not included).

The *BATTERY COMPARTMENT* is located underneath the pedal cover. To install or replace the 9 V battery, press the hinges with a ballpen and remove the pedal cover. Be careful not to scratch the unit.

 The BCH100 has no on/off switch. As soon as you insert the jack into the IN connector, the BCH100 begins running. When not using the BCH100, remove the jack from the IN connector. This extends the life of the battery.

The SERIAL NUMBER is located at the bottom.

2. WARRANTY

For our current warranty terms, please refer to our website at <http://www.behringer.com>.

3. SPECIFICATIONS

In	Connector	1/4" TS
	Impedance	500 k Ω
Out A	Connector	1/4" TS
	Impedance	1 k Ω
Out B	Connector	1/4" TS
	Impedance	1 k Ω
Power supply		9 V, 100 mA DC regulated PSU-SB-CN BEHRINGER 220 VAC adaptor China PSU-SB-EU BEHRINGER 230 VAC adaptor Europe PSU-SB-JP BEHRINGER 100 VAC adaptor Japan PSU-SB-SAA BEHRINGER 240 VAC adaptor Australia PSU-SB-UK BEHRINGER 240 VAC adaptor UK PSU-SB-UL BEHRINGER 115 VAC adaptor USA
Power connector		2 mm DC jack, negative center
Battery		9 V type 6LR61
Power consumption		30 mA
Dimensions (H x W x D)		approx. 54 mm (2 1/8") x 70 mm (2 3/4") x 123 mm (4 4/5")
Weight		approx. 0.33 kg (0.73 lbs)

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may therefore differ from those listed or shown.

4. SAFETY INSTRUCTIONS

Do not use near water, or install near heat sources. Use only authorized attachments/accessories. Do not service product yourself. Contact our qualified servicing personnel for servicing or repairs, **especially when power supply cord or plug is damaged.**

No utilizar cerca de agua o instalar cerca de fuentes de calor. Utilice sólo accesorios y aditamentos autorizados. No intente reparar el producto usted mismo. Contacte a nuestro personal técnico cualificado para servicio y reparaciones, **especialmente cuando la fuente o el cable de alimentación estén dañados.**

Не эксплуатуйте прибор вблизи от источников воды и тепла. Применяйте только авторизованные дополнительные устройства. Никогда не ремонтируйте прибор самостоятельно. Ремонт может производить только квалифицированный специализированный персонал, **особенно при повреждениях сетевого провода или сетевой вилки.**

水分の近くや、ヒーターなど熱気のある場所では使用しないでください。正式に認可された付属品のみを使用してください。製品はご自分では決して修理せず、特に電源コードもしくはプラグが損傷した場合には、必ず製品サービスおよびリペアの資格を有した当社担当員にご相談ください。

不要在靠近水源的地方使用，或在靠近热源的地方安装。只使用经过许可的附件 / 配件。不要自己进行产品维修，**尤其是当电源线或插座损坏的时候**。请联系我们的专业服务人员有关产品维修事宜。

Die deutsche Anleitung ist erhältlich @ www.behringer.com

Manuel francophone en téléchargement sur www.behringer.com

Manual en español disponible en www.behringer.com

Manuali italiani disponibili @ www.behringer.com

Русскоязычное руководство @ www.behringer.com

Polska instrukcja dostępna jest pod adresem @ www.behringer.com

Nederlandse handleiding beschikbaar @ www.behringer.com

Suomenkielinen käyttöohje saatavilla osoitteesta www.behringer.com

Svensk manual finns tillgänglig på www.behringer.com

Dansk vejledning findes på @ www.behringer.com

Manual português disponível @ www.behringer.com

Ελληνικό εγχειρίδιο υπάρχει διαθέσιμο στη διεύθυνση www.behringer.com

日本語版マニュアル @ www.behringer.com

使用说明书可在 www.behringer.com 下载

Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. The names of companies, institutions or publications pictured or mentioned and their respective logos are registered trademarks of their respective owners. Their use neither constitutes a claim of the trademarks by BEHRINGER® nor affiliation of the trademark owners with BEHRINGER®. BEHRINGER® accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colours and specification may vary slightly from product. Products are sold through our authorised dealers only. Distributors and dealers are not agents of BEHRINGER® and have absolutely no authority to bind BEHRINGER® by any express or implied undertaking or representation. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH. BEHRINGER® is a registered trademark. ALL RIGHTS RESERVED. © 2005 BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany. Tel. +49 2154 9206 0, Fax +49 2154 9206 4903

FEDERAL COMMUNICATIONS COMMISSION COMPLIANCE INFORMATION



Responsible party name: **MUSIC Group Services USA, Inc.**
Address: **18912 North Creek Parkway,
Suite 200 Bothell, WA 98011,
USA**
Phone/Fax No.: **Phone: +1 425 672 0816
Fax: +1 425 673 7647**

BASS CHORUS BCH100

complies with the FCC rules as mentioned in the following paragraph:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Important information:

Changes or modifications to the equipment not expressly approved by MUSIC Group can void the user's authority to use the equipment.