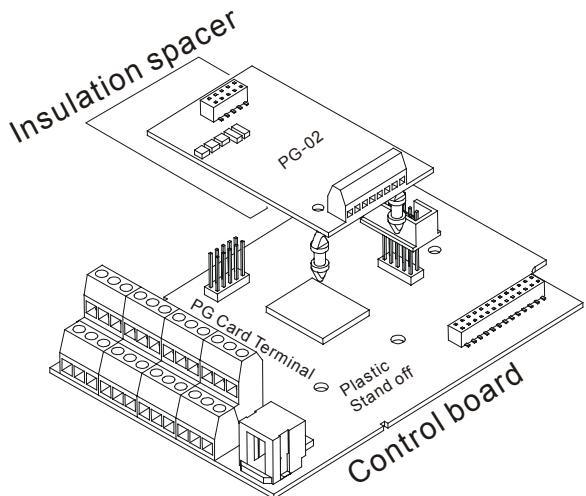


PG-02 Pulse Generator Card for VFD-B Series

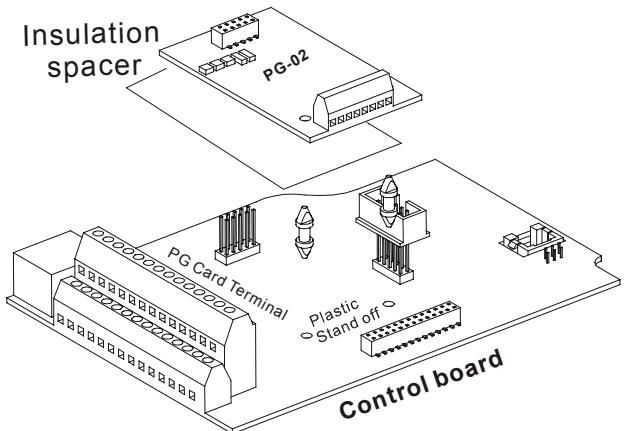
Installation Instruction

Installation


1 to 2HP (0.75kW to 1.5kW)



3 to 5HP (2.2kW to 3.7kW)



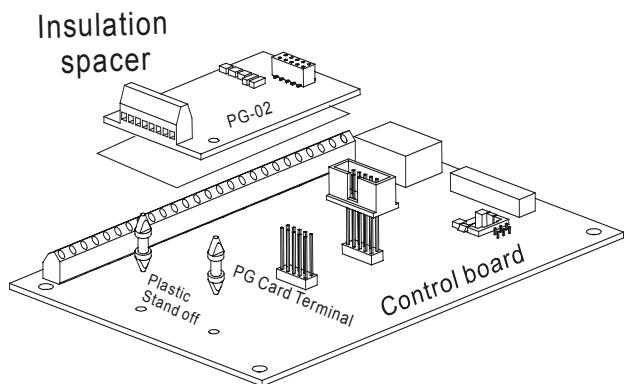7.5HP (5.5kW) and above



Control Terminals Block Designations

	Connect to VFD-B series control board		A/O
	Wiring Terminals		B/O
	FSW2 FSW1		COM
			VP
			DCM
			A
			\bar{A}
			B
			\bar{B}


PG-02

Select the power source and output of Pulse Generator


TP 5V

PG Card and Pulse Generator

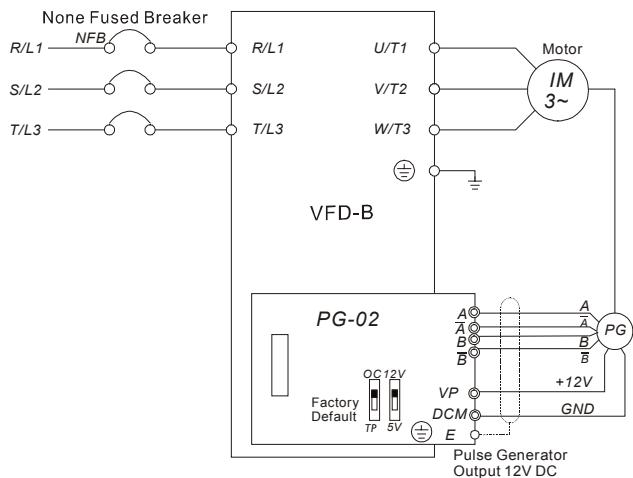
A. Basic Wiring Diagram



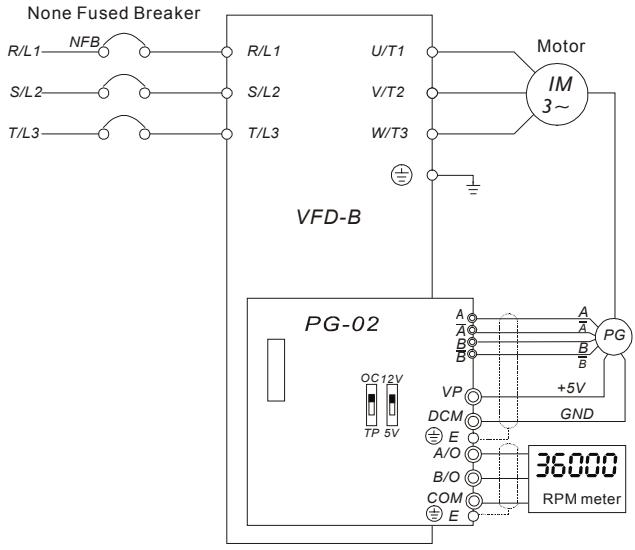B. Basic Wiring Diagram with RPM Meter Attached.



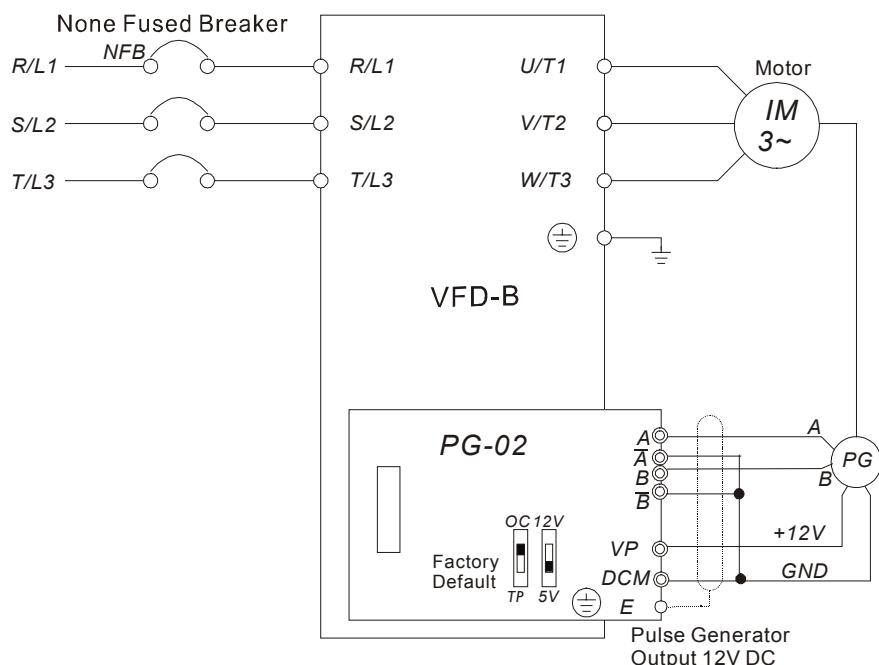C. When Pulse Generators is Open Collector type, please wire as following.



3

PG-02 Terminal Descriptions

Terminals

Terminal Symbols	Descriptions
VP	Power source of PG-02 (FSW1 can be switched to 12V or 5V) Output Voltage: (+12VDC ±5% 200mA) or (+5VDC ±2% 400mA)
DCM	Power source (VP) and input signal (A, B) common
A, \overline{A} , B, \overline{B}	Input signal from Pulse Generator. Input type is selected by FSW2. Maximum 500KP/Sec
A/O, B/O	PG-02 output signal for use with RPM Meter. Maximum DC24V 300mA
COM	PG-02 output signal (A/O, B/O) common.













Wiring Notes

The control, power supply and motor leads must be laid separately. They must not be fed through the same cable conduit / trunking.

1. Please use a shield cable to prevent interference. Do not run control wire parallel to any high voltage AC power line (220 V and up).
2. Connect shielded wire to  E only.
3. Recommended wire size 0.21 to 0.81mm² (AWG24 to AWG18).
4. Wire length:

Types of Pulse Generators	Maximum Wire Length	Wire Gauge
Output Voltage	50m	1.25mm ² (AWG16) or above
Open Collector	50m	
Line Driver	300m	
Complementary	70m	

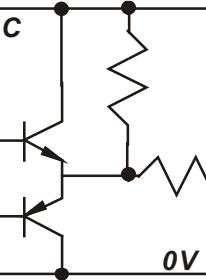Types of Pulse Generators

Types of Pulse Generators		FSW1 and FSW2 switches	
		5V	12V
Output Voltage			
Open collector			
Line driver			
Complimentary			

ASIA

DELTA ELECTRONICS, INC.
TAOYUAN Plant/
31-1, SHIEN PAN ROAD,
KUEI SAN INDUSTRIAL ZONE
TAOYUAN 333
TEL: 886-3-362-6301
FAX: 886-3-362-7267

NORTH/SOUTH AMERICA

DELTA PRODUCTS
CORPORATION
Sales Office/
P.O. BOX 12173
5101 DAVIS DRIVE
RTP, NC 27709 U. S. A.
TEL: 1-919-767-3813
FAX: 1-919-767-3969

EUROPE

DELTRONICS (Netherlands) B.V.
Sales Office/
Industriegebied Venlo Nr. 9031
Columbusweg 20
NL-5928 LC Venlo
The Netherlands
TEL: 31-77-324-1930
FAX: 31-77-324-1931