


# REPAIR PARTS MANUAL MODEL NO. PR600Y22RHP (MFG. ID. NO. 96142004600) Rotary Lawn Mower

For Parts and Service, contact our authorized distributor: call 1-800-849-1297 For Technical Assistance: call 1-800-829-5886

## Poulan PRO

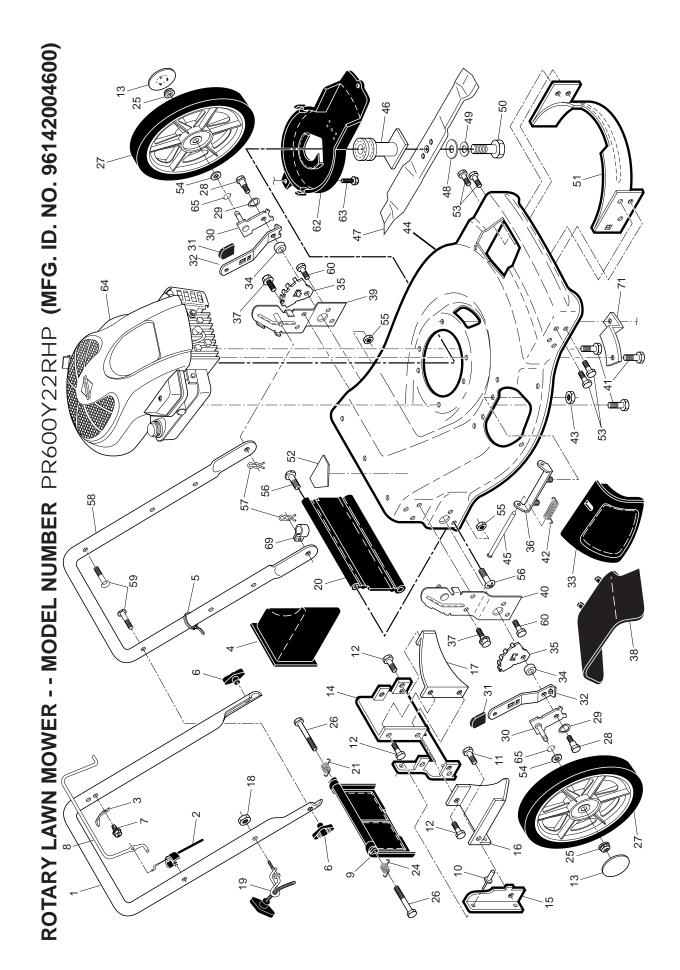


# ROTARY LAWN MOWER -- MODEL NUMBER PR600Y22RHP (MFG. ID. NO. 96142004600)

		53)		4-20			1-1/4				× 3/4			on,			Briggs	-3723)					wn)	lish	uch		
	ø.	(Includes Key Number 53)		Screw, Serrated, TT 1/4-20		9	Hinge Screw 1/4-20 x 1-1/4				Bolt, Hex Head 3/8-16 x 3/4		Shield	Engine, Briggs & Stratton,	Model Number 120T02	(For engine service and	replacement parts, call Briggs	& Stratton at 1-800-233-3723)			ket,		Warning Decal (not shown)	Operator's Manual, English	Operator's Manual, French	annal	
DESCRIPTION	Kit, Front Baffle	es Key I	· Decal	Serrate	r, Flat	Nut, Hex 3/8-16	Screw 1	Hairpin Cotter	Lower Handle	Bolt	ex Head	Shield	Screw, Debris Shield	, Briggs	Number	igine sei	ment pa	ton at 1-		able	Mounting Bracket,	Shield	g Decal	or's Mar	or's Mar	Repair Parts Manual	
DESCR	Kit, Fro	(Includ	Danger Decal	Screw,	Washer, Flat	Nut, He	Hinge (	Hairpin	Lower	Handle Bolt	Bolt, H	<b>Debris Shield</b>	Screw,	Engine	Model	(For en	replace	& Strat	O-Ring	Clip, Cable	Mounti	Debris Shield	Warnin	Operat	Operat	Repair	
PART NO.	170031		404763	17600406	88348	751592	88652	51793	151590X479	191574	74760612	405843	192325	!					197480	197991	188839X004		404764	193733	193736	417122	
KEY NO.	51		25	53	54	22	99	22	28	29	09	62	63	64					92	69	71		;	;	;	;	
DESCRIPTION	Bolt, Shoulder 3/8-16 x 1	Washer, Curved, Cylindrical	Axle Arm Assembly	Selector Knob	Selector Spring	Mulcher Door	Spacer	Wheel Adjusting Bracket	Hinge Bracket Assembly	Screw, Sems, Thread Cutting	5/16-18 x 3/4	Discharge Deflector	Handle Bracket Assembly, LH	Handle Bracket Assembly, RH	Screw, Hex Head, Threaded,	Rolled 3/8-16 x 1-1/8	Spring, Torsion	Nut, Hex, Nylock	Kit, Mower Housing (Includes	Key Numbers 14, 15 and 51)	Rod, Hinge	Blade Adapter / Pulley	Blade, 22"	Washer, Hardened	Washer, Helical	Screw, Machine, Hex Head	3/8-24 x 1-3/8 Grade 8
PART NO.	142748	401630	401180X004	701037X421	401626X004	189917X428	401629	700325X005	175735	150078		402574X428	195915X479	195914X479	150406		193000	73800400	417123		175650	189179	406713	851074	850263	851084	
KE√ NO.	28	29	30	31	32	33	34	35	36	37		38	39	40	41		42	43	44		45	46	47	48	49	20	
DESCRIPTION	Upper Handle	Cable, Operator Presence	Bracket, Upstop	Mulcher Plug	Wire Tie	Handle Knob	Screw	Control Bar	Rear Door Assembly	Pop Rivet	Screw, Self-Tapping	#10-24 x 5/8	Screw, Hex Hex Head,	Sems 1/4-20 x 1/2	Hubcap	Back Plate	Side Baffle	Discharge Baffle	Rear Baffle	Keps Locknut 1/4-20	Rope Guide	Rear Skirt	Spring, Rear Door, LH	Spring, Rear Door, RH	Nut, Hex, Flanged	Bolt, Rear Door	Wheel & Tire Assembly, Rear
PART NO.	194203X479	183567	850733X004	166649	66426	189713X428	750634	194199X421	401813X428	128415	150050		54583		407794X421	195622X479	410545X479	176655X479	140661X479	132004	194788	413160	405421	405423	409148	184193	408852X421
KE NO.	<b>~</b>	7	က	4	2	9	7	8	6	10	7		12		13	14	15	16	17	18	19	20	21	24	25	26	27

**NOTE:** All component dimensions given in U.S. inches. 1 inch = 25.4 mm.

IMPORTANT: Use only Original Equipment Manufacturer (O.E.M.) replacement parts. Failure to do so could be hazardous, damage your lawn mower and void your warranty.

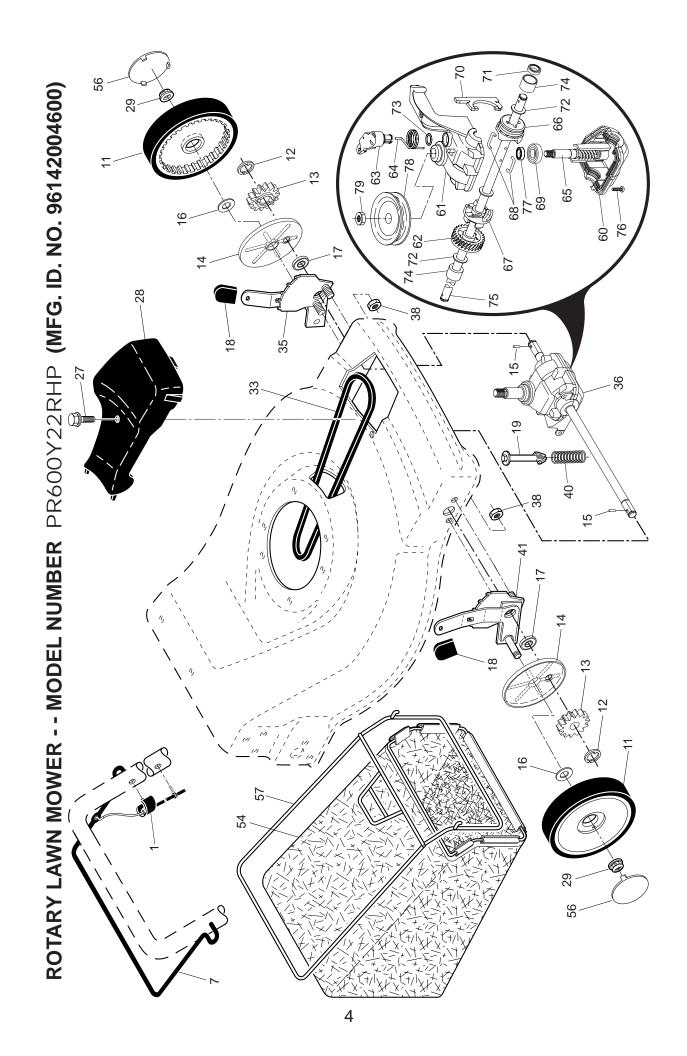

# ROTARY LAWN MOWER -- MODEL NUMBER PR600Y22RHP (MFG. ID. NO. 96142004600)

DESCRIPTION	Hubcap	Frame, Grassbag	Case, Lower	Case, Upper	Gear, 27 Teeth	Lever, Clutch	Spring, Return	Shaft, Input	Dog, Movable	Dog, Fixed	Wire, Formed	Bearing, Ball	Fork, Shift	Seal, Output Shaft	Washer	Seal, Case	Bushing	Shaft, Output	Screw	Seal, Input Shaft	Pulley, Drive	Locknut, Hex		* Use Dow Corning #709 to reseal Gear Case Halves
PART NO.	407793X421 H	411952 F	183497 * C	183498 * C	183499 G	183500 L	183501 S	416988 S	183503 E	183504 E	183505 V	183506 B	183507 F	183508 S	183509 V	183510 S	183511 B	196561 S	183513 S	183514 S	416987 F	416986 L		e Dow Corning #
KEY NO.	99	22	09	61	62	63	64	9	99	29	89	69	20	71	72	73	74	75	9/	77	78	26		* Us
DESCRIPTION	Drive Control Assembly (Includes Cable)	Retainer, Spring	Bar, Drive Control	Wheel & Tire Assembly, Front	E-Ring	Pinion	Dust Cover	Pawl, Drive	Washer, Flat 3/8	Bearing, Wheel Adjuster	Selector Knob			Locknut, Hex	V-Belt	Kit, Wheel Adjuster, LH	(Includes Knob and Bearing)	Gear Case Assembly, Complete	Locknut 1/4-20	Spring	Kit, Wheel Adjuster, RH	(Includes Knob and Bearing)	Grassbag Assembly	
PART NO.	194653	150495	194185X421	180775	12000058	403849	189403	404845	67725	191039	701037X421	175262	401271X428	409149	146527	408862		415226	73800400	137090	408861		411062	
KEY NO.	_	9	7	7	12	13	4	15	16	17	18	27	28	29	33	35		36	38	40	41		24	

**NOTE:** All component dimensions given in U.S. inches. 1 inch = 25.4 mm. **IMPORTANT:** Use only Original Equipment Manufacturer (O.E.M.) replacement parts. Failure to do so could be hazardous, damage your lawn mower and void your warranty.

## LIMITED WARRANTY

The Manufacturer warrants to the original consumer purchaser that this product as manufactured is free from defects in materials and workmanship. For a period of two (2) years from date of purchase by the original consumer purchaser, we will repair or replace, at our option, without charge for parts or labor incurred in replacing parts, any part which we find to be defective due to materials or workmanship. This Warranty is subject to the following limitations and exclusions.

- 1. This warranty does not apply to the engine, transaxle/transmission components, battery (except as noted below) or components parts thereof. Please refer to the applicable manufacturer's warranty on these items.
- 2. Transportation charges for the movement of any power equipment unit or attachment are the responsibility of the purchaser. Transportation charges for any parts submitted for replacement under this warranty must be paid by the purchaser unless such return is requested by the manufacturer.
- 3. Battery Warranty: On products equipped with a Battery, we will replace, without charge to you, any battery which we find to be defective in manufacture, during the first ninety (90) days of ownership. After ninety (90) days, we will exchange the Battery, charging you 1/12 of the price of a new Battery for each full month from the date of the original sale. Battery must be maintained in accordance with the instructions furnished.
- 4. The Warranty period for any products used for rental or commercial purposes is limited to 45 days from the date of original purchase.
- 5. This Warranty applies only to products which have been properly assembled, adjusted, operated, and maintained in accordance with the instructions furnished. This Warranty does not apply to any product which has been subjected to alteration, misuse, abuse, improper assembly or installation, delivery damage, or to normal wear of the product.
- 6. Exclusions: Excluded from this Warranty are belts, blades, blade adapters, normal wear, normal adjustments, standard hardware and normal maintenance.
- 7. In the event you have a claim under this Warranty, you must return the product to an authorized service dealer.

Should you have any unanswered questions concerning this Warranty, contact:

Poulan Pro Customer Service Department 1030 Stevens Creek Road Augusta, GA 30907 USA In Canada contact:
Poulan Pro
Customer Service Department
5855 Terry Fox Way
Mississauga, Ontario L5V 3E4

giving the model number, serial number and date of purchase of your product and the name and address of the authorized dealer from whom it was purchased. THIS WARRANTY DOES NOT APPLY TO INCIDENTAL OR CONSEQUENTIAL DAMAGES AND ANY IMPLIED WARRANTIES ARE LIMITED TO THE SAME TIME PERIODS STATED HEREIN FOR OUR EXPRESSED WARRANTIES. Some areas do not allow the limitation of consequential damages or limitations of how long an implied Warranty may last, so the above limitations or exclusions may not apply to you. This Warranty gives you specific legal rights, and you may have other rights which vary from locale to locale.

This is a limited Warranty within the meaning of that term as defined in the Magnuson-Moss Act of 1975.

## **SERVICE NOTES**

## Poulan PRO