

TRITON
TECHNOLOGIES

www.tritonusa.com

Pairing the AX Micro

Pairing mode lasts for 3 minutes, after this period the AX Micro returns to standby mode.

If the AX Micro is on, turn it OFF
Click and hold the Multi-function Button until LED status indicator light starts flashing red and blue (appx 7 seconds).
If prompted for a pin number to establish a connection on the paired Bluetooth device, enter 0000.
When connected, the AX Micro LED status indicator light will turn off.

Wearing the AX Micro

The AX Micro can be worn on the left or right ear. When the headset is not in use, you can clip the headset onto the lanyard for convenience and portability.

Select one of the two rubber grippers that fits most comfortable and securely.
Place the headset in the ear so that the rubber grippers hold the headset snugly against the ear wall.



8

Basic Handsfree Operations for the AX Micro

Answer Call
An alert sound will output from both phone and headset.
Short click Multi-Function Button to answer call.

Make Call
Dial and place a call from phone and automatically be transferred to headset.
Short click Multi-Function Button to switch the call to the headset.
NOTE: Some phones will automatically transfer call.

Redial
Double click Multi-Function Button when in idle state
NOTE: Double click on some phones will display the number last called or received. In this case, double click Multi-Function Button again to redial.

Voice Dial
Make sure your phone supports voice dialing, that it is activated and the voice tags have been recorded if needed.
Long-click Multi-Function Button when in idle state.
Follow the instruction message from phone to complete voice dialing.
Double click Multi-Function Button once.

Volume Control
Short click (+) or (-) to adjust volume during handsfree mode.
NOTE: Beep tones will be heard at maximum or minimum volume.

9

End Call
Long click Multi-Function Button during 'Talk Mode'.
NOTE: If the other party ends the call first, the AX Micro will automatically return to standby mode.

Reject Call
Long click Multi-Function Button while phone is ringing.

Call Transfer
Short click Multi-Function Button during 'Talk Mode' to transfer call from headset to phone or vice versa.

Call Waiting
Long click Multi-Function Button during 'Talk Mode' to answer an incoming call.
Short click Multi-Function Button twice to switch between calls.
NOTE: This function can only be used if user has subscribed for such services.

Microphone Mute
Long click the (+) and (-) buttons simultaneously during 'Talk Mode' if you do not want to mute your voice for privacy.
Long click the (+) and (-) buttons simultaneously to cancel mute function.

Reconnect
Short click Multi-Function Button twice to reconnect headset with phone

10

Product Specifications

Standards	Bluetooth Specification V2.0
RF Frequency Range	2402 ~ 2480 MHz
Profiles Supported	Headset, Handsfree V1.5
Transmission Power	0.25 ~ 2.5mW (Class 2)
Distance	10m (in open space)
Battery Type	Li-Ion Polymer
Battery Life	Standby > 150 hrs, Voice Connection :4 hrs
Charging Time	< 3 hrs
Weight	9.5g
Operating Temp.	-10 ~ +50°C,
& Humidity	Rel. Humidity 0 ~ 95%
Certification	BQB, FCC, CE

11

Product Warranty

Triton Technologies warrants this product against all defects in material and workmanship for a period of one year from the date of purchase by end user. The conditions for warranty are as follows :

The warranty is valid only if the original receipt issued to the original purchaser by the dealer is presented with the product to be repaired or replaced.
The warranty is void if the serial number, date of purchase and product label had been removed.
The warranty does not cover any failure or damage of the product due to normal wear and tear, physical abuse, improper installation, misuse, modification or repairs by unauthorized third parties.
Triton Technologies does not assume responsibility for any loss or damage incurred during shipment and as a result of force of nature.

Triton Technologies is not liable for any incidental or consequential damages arising from the use or misuse of the product.
All warranty claims are limited to repair or replacement of the defective product at the sole discretion of Triton Technologies. If Triton Technologies repairs or replaces the product, the repaired or replaced product shall be warranted for the remaining time of the original warranty period. Repair or replacement may involve the use of functionally equivalent reconditioned units. Replaced part or product becomes the property of Triton Technologies.
Consumable components, such as batteries, are not included in the warranty obligation.

12

Disclaimer Notice

The manufacturer shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material. This document contains proprietary information, which is protected by international patent applications and copyright. All rights reserved. No part of this document may be copied, reproduced or translated without prior written consent of the manufacturer. The manufacturer reserves the right to revise this publication and to make changes from time to time in the contents hereof without obligation to notify any person of such revisions or changes. The manufacturer also reserves the right to change the specifications without notice.

European CE notice to users and product statements
This product is CE marked according to the provisions of the R & TTE Directive (99/5/EC). Hereby, Triton Technologies Co., Ltd. declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. For further information, please contact <http://www.tritonusa.com>

FCC notice to users and product statements
THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

WEEE Directive 2002/96/EC Art. 11(2)
The use of the symbol indicates that this product may not be treated as household waste. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

13

AX Micro
Bluetooth® Mono Headset with Charging Cradle

TRI-BH200
Rev 1.0

TRITON
TECHNOLOGIES

TRITON
TECHNOLOGIES

Phone Support: 800-431-1176
Online Support: www.TRITONUSA.com
Email Support: support@tritonusa.com


CONTENTS

Introduction.....2
Safety Instructions.....3
Product Features.....4
Package Contents.....5
Description of Parts.....6
Charging the AX Micro Battery.....7
Switching the TRI-BH200 ON/OFF.....7
Pairing the AX Micro8
Wearing the AX Micro.....8
Basic Handsfree Operations for the AX Micro.....9
Product Specifications.....11
Product Warranty.....12

1

Introduction

Thank you for purchasing the Triton Bluetooth Headset TRI-BH200, the AX Micro. The AX Micro is a high-tech wireless headset for handsfree operations at its best. The AX Micro can be connected to any Bluetooth device that supports either headset or handsfree Bluetooth profiles. The AX Micro features a revolutionary finger-like rubber gripping mechanism that holds the headset firmly against the auricle (Outer flap of the ear, also called the pinna), making it convenient to wear and comfortable even when used for extended hours. Additionally, the symmetrical design is one that can be easily switched from one ear to the other

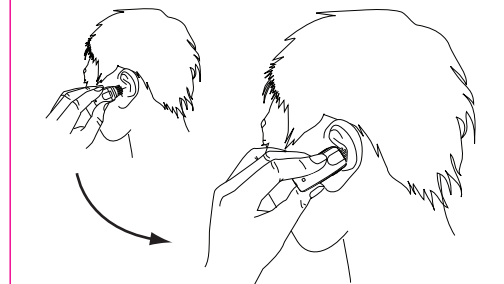

2

Safety Instructions

Know the law: Make sure to check to local laws and regulations on the use of mobile phones and handsfree equipment in the areas you intend to use them.
Extended use of headset devices at high volume levels may cause hearing damage.
When cleaning the device, do not use any type of scouring pad, abrasive powder or solvents as these may permanently dull the finish.
Charge the battery for at least 2 hours before first use. Do not use in prohibited areas such as hospitals or on airplanes. Do not expose components to extreme temperatures, prolonged sunlight, moisture or vibrations.
Keep headset and charger cradle away from reach of children. Do not place metal objects, such as coins or jewelry, on charger cradle contacts. This may cause a short circuit with the risk of fire or explosion.

3


Product Features

Bluetooth V1.2, 2.0 compliant
Supports headset and handsfree profiles for hands free function with Bluetooth phones
Unique finger-like rubber grippers to secure the headset on your ear
High performance built-in speaker and microphone
Red and blue LED status indicator light
More than 4 hours of talk time and 150 hours of standby time
Convenient charging via cradle using standard Mini-USB (not provided) or AC/DC Adapter

4


Package Contents

1. Triton Bluetooth Headset TRI-BH200, AX Micro
2. Charger Cradle
3. AC/DC Charger Adapter
4. Rubber Grippers (2 sizes)
5. Lanyard and clip
6. User Manual

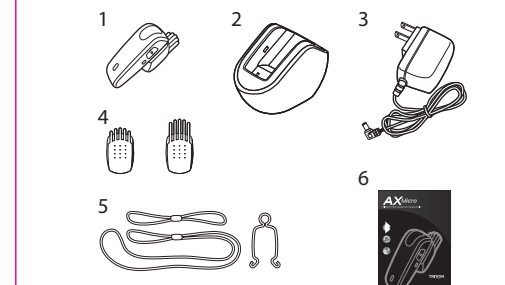

5

Description of Parts

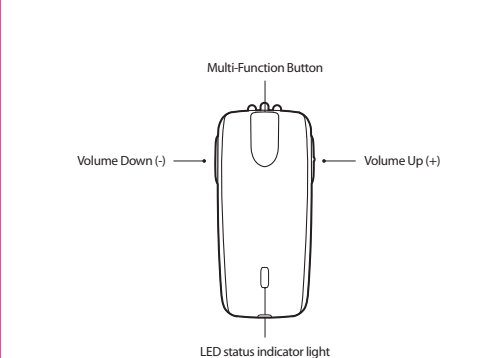


6

Many of the buttons perform multiple tasks, based upon if they are tapped, or held down. We call this "Short Click" and "Long Click" respectively throughout the manual.

! Improper battery charging can shorten usage times !

Charge the battery for at least 2.5 hours prior to first use. During charging the headset LED status indicator light will be red.
When fully charged, the headset LED status indicator light will be blue.

- To connect charger
1. Connect the charger cradle with the AC/DC Adapter.
 2. Plug cord into power supply
 3. Mount headset onto cradle

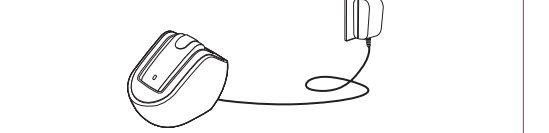

To Turn ON: Click and hold the Multi-Function Button until the LED status indicator light turns blue and periodically flashes.
To Turn OFF: Click and hold the Multi-Function Button until the LED status indicator light turns red and then off.

7