



3500 Pelco Way
Clovis, CA 93612-5699
USA

In North America & Canada:
Tel (800) 289-9100
FAX (800) 289-9150

International Customers:
Tel +1(559) 292-1981
FAX +1(559) 348-1120

www.pelco.com

C1993M (2/01) VIEWSTN/1 Viewing Station

IMPORTANT SAFEGUARDS AND WARNINGS

Prior to installation and use of this product, the following WARNINGS should be observed.

1. Installation and servicing should only be done by qualified service personnel and conform to all local codes.
2. Unless the unit is specifically marked as a NEMA Type 3, 3R, 3S, 4, 4X, 6, or 6P enclosure, it is designed for indoor use only and it must not be installed where exposed to rain and moisture.
3. Only use replacement parts recommended by Pelco.
4. The installation method and materials should be capable of supporting four times the weight of the unit and equipment.

The product and/or manual may bear the following marks:



This symbol indicates that dangerous voltage constituting a risk of electric shock is present within this unit.



This symbol indicates that there are important operating and maintenance instructions in the literature accompanying this unit.



Please thoroughly familiarize yourself with the information in this manual prior to installation and operation.

DESCRIPTION

Pelco's VIEWSTN/1 Public Viewing Station is specifically designed for retail applications to provide a clear, visual warning to potential shoplifters that these premises are under surveillance. When properly installed the station is an effective deterrent against shoplifting.

The VIEWSTN/1 includes:

Qty Description

1	Monitor/camera mount
1	Mount arm
1	Monitor rack
1	Tube MS03-0202-2000 (anti-seize)
4	10-32 x .50 Allen head bolts and washers
2	5/16-18 x .75 Allen head bolts and locking washers
1	Color monitor and power cord
1	Color camera

INSTALLATION

To properly install the VIEWSTN/1 Public Viewing Station refer to Figure 1 and do the following:

1 Prepare Wiring/Cabling

- a. Feed the monitor power cable through the top of the swivel collar and out the monitor feedthrough hole.
- b. Feed the video cable (not provided) through the camera feedthrough and out the monitor feedthrough hole.
- c. Pull wires for camera power through the top of the swivel collar and out the camera feedthrough hole.

2 Install Mount Arm

- a. Apply anti-seize to the threads of the NPT pipe. Thread the swivel collar (at the top of the mount arm) onto a 1 1/2-inch NPT pipe (not provided).
- b. Tighten the top set screw on the swivel collar to secure the mount to the NPT pipe.

NOTE: The bottom set screw on the swivel collar is for positioning the mount arm. Finish the installation before adjusting the position of the system.

3 Attach Monitor Rack

- a. Place the monitor rack onto the bottom of the mount arm. Refer to the *Monitor Rack Detail*.
- b. Secure the monitor rack to the mount arm with the supplied Allen head bolts and washers. Install one 5/16-18 x .75-inch bolt and locking washer and two 10-32 x .50-inch bolts and flat washers to each side of the monitor rack.

4 Install Monitor

- a. Remove back feet of monitor and save the screws.
- b. Slide the monitor onto the monitor rack. For proper installation, the back of the monitor should be under the lip of the rack and the front feet of the monitor should be in the holes in the front of the rack. Refer to the *Back of Monitor Detail*.
- c. Use the screws from the back monitor feet to secure the back of the monitor to the rack. Insert the screws through the bottom of the monitor rack and into the holes used previously for the back monitor feet.
- d. Connect the video cable to the BNC video input on the rear panel of the monitor.
- e. Plug the power cable into the AC INLET connection on the rear panel.

5 Install Camera

- a. Connect video cable and power wires. Push cable and wires back into the mount arm.
- b. Set camera assembly over the camera mounting collar. Gently tighten the set screw in the collar to lightly secure the camera to the mount. Refer to the *Camera Mounting Detail*.

6 Final Adjustments

- a. Monitor Rack - Tilt monitor to desired position. Tighten the Allen head bolts to secure the monitor.
- b. Mount Arm - Turn mount arm to desired position. Tighten the bottom set screw on the swivel collar to secure in place.
- c. Camera - To adjust the camera, loosen the camera collar set screw and adjust the ball and swivel assembly. When the camera is in the ideal viewing position, tighten the set screw.

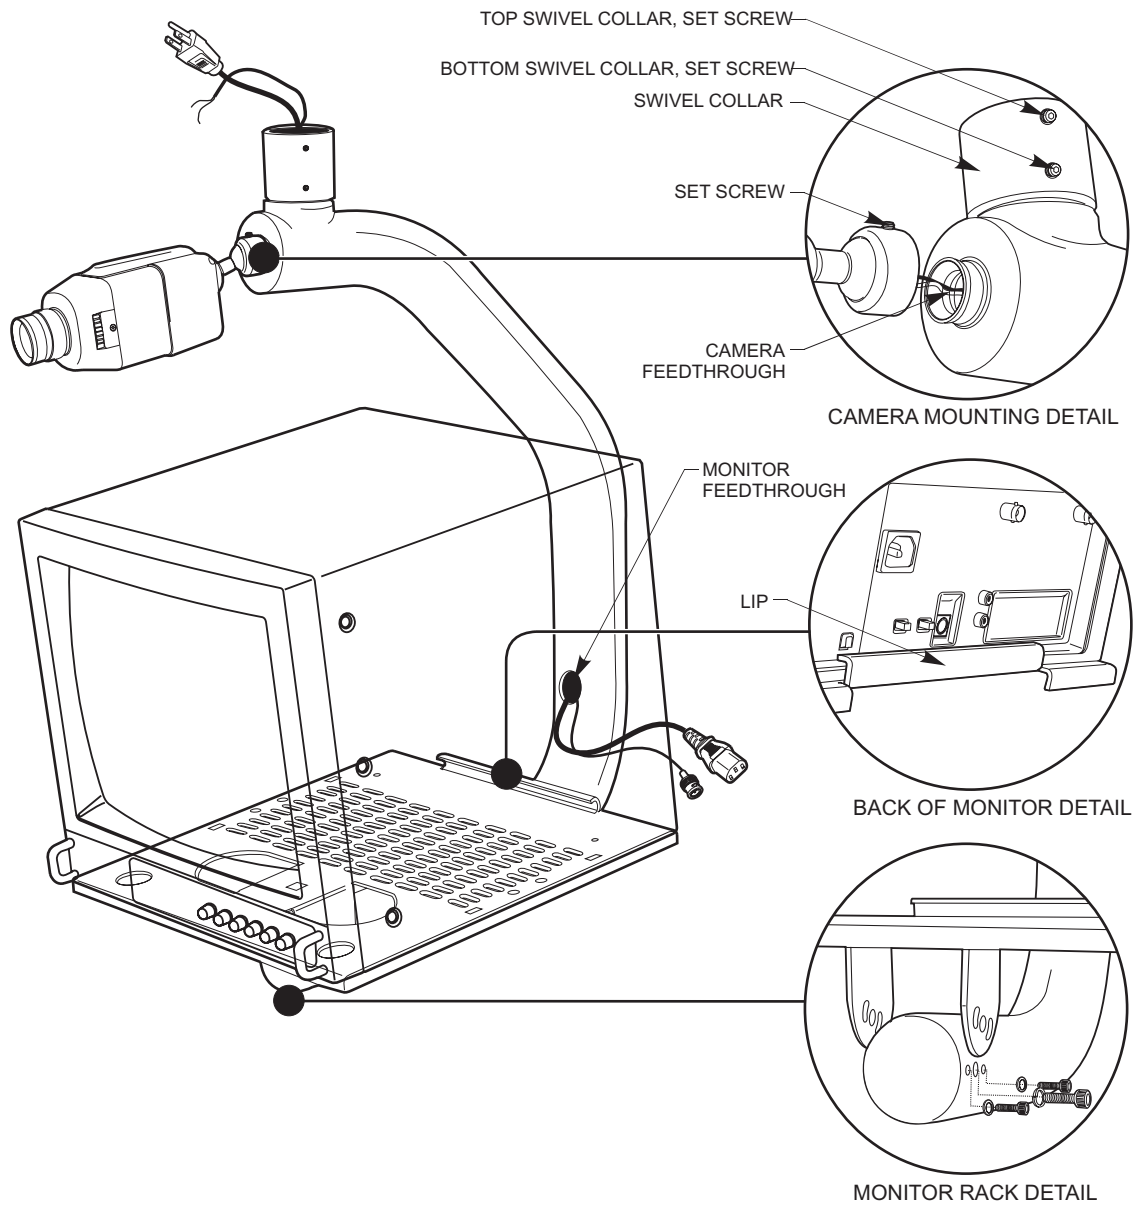


Figure 1. Viewing Station Installation

PRODUCT WARRANTY AND RETURN INFORMATION

WARRANTY

Pelco will repair or replace, without charge, any merchandise proved defective in material or workmanship **for a period of one year** after the date of shipment.

Exceptions to this warranty are as noted below:

- Five years on FT/FR8000 Series fiber optic products.
- Three years on Genex® Series products (multiplexers, server, and keyboard).
- Three years on Camclosure® and fixed camera models, except the CC3701H-2, CC3701H-2X, CC3751H-2, CC3651H-2X, MC3651H-2, and MC3651H-2X camera models, which have a five-year warranty.
- Two years on standard motorized or fixed focal length lenses.
- Two years on Legacy®, CM6700/CM6800/CM9700 Series matrix, and DF5/DF8 Series fixed dome products.
- Two years on Spectra®, Esprit®, ExSite™, and PS20 scanners, including when used in continuous motion applications.
- Two years on Esprit® and WW5700 Series window wiper (excluding wiper blades).
- Eighteen months on DX Series digital video recorders, NVR300 Series network video recorders, and Endura™ Series distributed network-based video products.
- One year (except video heads) on video cassette recorders (VCRs). Video heads will be covered for a period of six months.
- Six months on all pan and tilts, scanners or preset lenses used in continuous motion applications (that is, preset scan, tour and auto scan modes).

Pelco will warrant all replacement parts and repairs for 90 days from the date of Pelco shipment. All goods requiring warranty repair shall be sent freight prepaid to Pelco, Clovis, California. Repairs made necessary by reason of misuse, alteration, normal wear, or accident are not covered under this warranty.

Pelco assumes no risk and shall be subject to no liability for damages or loss resulting from the specific use or application made of the Products. Pelco's liability for any claim, whether based on breach of contract, negligence, infringement of any rights of any party or product liability, relating to the Products shall not exceed the price paid by the Dealer to Pelco for such Products. In no event will Pelco be liable for any special, incidental or consequential damages (including loss of use, loss of profit and claims of third parties) however caused, whether by the negligence of Pelco or otherwise.

The above warranty provides the Dealer with specific legal rights. The Dealer may also have additional rights, which are subject to variation from state to state.

If a warranty repair is required, the Dealer must contact Pelco at (800) 289-9100 or (559) 292-1981 to obtain a Repair Authorization number (RA), and provide the following information:

1. Model and serial number
2. Date of shipment, P.O. number, Sales Order number, or Pelco invoice number
3. Details of the defect or problem

If there is a dispute regarding the warranty of a product which does not fall under the warranty conditions stated above, please include a written explanation with the product when returned.

Method of return shipment shall be the same or equal to the method by which the item was received by Pelco.

RETURNS

In order to expedite parts returned to the factory for repair or credit, please call the factory at (800) 289-9100 or (559) 292-1981 to obtain an authorization number (CA number if returned for credit, and RA number if returned for repair).

All merchandise returned for credit may be subject to a 20% restocking and refurbishing charge.

Goods returned for repair or credit should be clearly identified with the assigned CA or RA number and freight should be prepaid. Ship to the appropriate address below.

If you are located within the continental U.S., Alaska, Hawaii or Puerto Rico, send goods to:

Service Department
Pelco
3500 Pelco Way
Clovis, CA 93612-5699

If you are located outside the continental U.S., Alaska, Hawaii or Puerto Rico and are instructed to return goods to the USA, you may do one of the following:

If the goods are to be sent by a COURIER SERVICE, send the goods to:

Pelco
3500 Pelco Way
Clovis, CA 93612-5699 USA

If the goods are to be sent by a FREIGHT FORWARDER, send the goods to:

Pelco c/o Expeditors
473 Eccles Avenue
South San Francisco, CA 94080 USA
Phone: 650-737-1700
Fax: 650-737-0933

REVISION HISTORY

Manual #	Date	Comments
C1993M	2/01	Original version.