

# 16x16 SDI Router with Stereo Audio Follow

## Model 861-XL1616G



- ◆ **16 x16, SDI, Analog Audio Follow**
- ◆ **Local or Remote Control Panel**
- ◆ **AFV, breakaway, or X-Y Control**
- ◆ **Maximum of 256 Remote Panels**
- ◆ **RS-232 Serial Control, Standard**

The 800 Series Routing Switchers are wide bandwidth vertical interval switchers designed for professional video production facilities. The compact design of Link's routing switchers makes them an essential part of any facility.

Packaged in a 19" rack mountable chassis, the switchers are supplied with a single front-loaded power supply. An optional redundant power supply is available. High quality front panel push buttons are used for selection of inputs and outputs.

Remote control panels are interconnected with standard Ethernet 10Base2 single coax connections. RS-232 is provided through a standard D-sub connector. Panels can be set to control a single output bus or the entire matrix. The router is supplied with local control panel with audio break-away.

The Link Switcher's flexibility is unmatched in the industry. Modular construction offers unique flexibility to the user, and provides an easy means of adding additional features or upgrading to digital modules. Power supplies are accessible from the front of the unit and may be easily installed or removed. Analog switchers can easily be upgraded to digital by adding field installable modules.

Industry standard BNC connectors are used for video inputs and removable 3-Pin connectors are used for stereo audio inputs and outputs.

Routers are available for analog video only, analog video with stereo audio follow, digital video only, and digital video with two-stream AES/EBU audio follow. SUPPLIED WITH CONTROL PANEL WITH AUDIO BREAK-AWAY.

The Link 16 x16 routing system features:

- Modular Design – plug-in modules for video & audio. No active components on the frame.
- Two power supply slots are accessible from the front panel. One power supply is standard.
- A redundant power supply is available as an option.
- Detachable X-Y front panel control with Ethernet 10Base2 coax connection.
- Analog video only models and models with audio follow video.
- Digital video only models and models with analog audio follow.
- Digital video only models and models with digital audio follow.
- RS-232 control standard.
- The 16X16 Video switcher is in a 1 RU and the audio follow in a 1 RU

### Remote Mounting Kits for Control Panels

The supplied control panel for all switchers is shipped installed into the front of the main electronics chassis. The control panel can be removed from the electronics chassis in the field and installed into a remote mounting kit. The mounting kit hardware includes rack-mounting hardware for the control panel, a blank panel(s) that is installed onto the front of the electronics chassis, and a power supply. Order the appropriate rack mounting kit from the list below:

<b>861-XL1616D</b>	16 x16 Analog Video Only Routing Switcher	One Rack
<b>861-XL1616G</b>	16 x16 Analog Video Routing Switcher with Stereo Audio Follow Video	One Rack
<b>861-XL1616F</b>	16 x16 Analog Component 5 Layer RGBHV HD15 Connectors, AF with Control Panel	One Rack

# 16 x 16 Routing Switching Systems

## SDI VIDEO INPUT:

Format: ..... SMPTE 259  
 Number: ..... 16  
 Video Level: ..... 800 mV  
 Impedance: ..... 75 $\Omega$  Looping  
 Coupling: ..... DC  
 Connector: ..... BNC  
 Return Loss: ..... 15 dB @ 400mbps

## ANALOG AUDIO INPUT:

Connector Type: ..... Weco, 3-Pin Disconnect  
 Impedance: ..... 20K $\Omega$   
 Level: ..... +26dBu, maximum  
 CMRR: ..... 60dB @ 1 KHz

## SDI VIDEO OUTPUTS:

Number: ..... 16  
 Connector: ..... BNC  
 Level: ..... Unity Gain,  $\pm 0.1$  dB  
 Character Video: ..... 90 IRE Units  
 Return Loss: ..... 12dB to 400mbps  
 Impedance: ..... 75 $\Omega$   $\pm 1\%$   
 Vertical Interval Switching: ..... Line 6, NTSC  
 Frequency Response: .....  $\pm 0.1$ dB to 5MHz  
 ..... -3.0dB to 50MHz  
 Differential Gain: ..... 0.10%, 10% to 90% APL  
 Differential Phase: ..... 0.10°, 10% to 90% APL  
 Crosstalk: ..... 62dB to 5 MHz, worse case  
 Propagation Delay: ..... 5 nS, typical  
 Hum and Noise: ..... >60dB to 5 Hz  
 DC Offset: ..... <25mV  
 Line Rate Tilt: ..... <0.1%  
 Field Rate Tilt: ..... <0.1%  
 SNR: ..... -73dB

## ANALOG AUDIO OUTPUTS:


Signal Type: ..... Balanced  
 Connector Type: ..... Weco, 3-Pin Disconnect  
 Impedance: ..... >30K $\Omega$   
 Level: ..... 26dBu, maximum  
 Frequency Response: .....  $\pm 0.1$ dB to 20kHz, ref 1kHz  
 Crosstalk: ..... 90dB @ 10 KHz  
 DC Offset: ..... <50mV  
 SNR: ..... <100dB, 20Hz to 20KHz  
 IM/THD: ..... <0.02%

## ENVIRONMENTAL:

Temperature: ..... 0° to 50° C ambient  
 Humidity: ..... 10%/90% non-condensing  
 Power: ..... 9.5 VAR  
 AC Voltage: ..... 120/240 VAC  $\pm 10\%$ , 50/60Hz

## MECHANICAL:

Height: ..... 1.75 inches  
 Width: ..... 19 inches  
 Depth: ..... 9.25 inches  
 Weight: ..... 9lbs

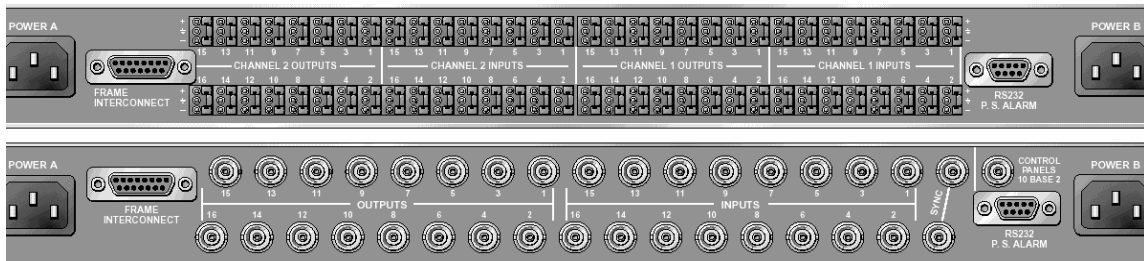

TOP VIEW IS AUDIO FOLOW & BOTTOM VIEW IS REAR OF VIDEO ROUTER