

DEALER SET-UP INSTRUCTIONS for SNAPPER 21" CAST ALUMINUM REAR DISCHARGE WALK BEHIND MOWERS

This SNAPPER Walk Behind Mower uses a handle engine control bail system to kill the engine for the SAFETY of the operator. These mowers are designed for quick set-up. The checklist on Page 2 should be filled out by the dealer as the items are checked off and/or performed and the Consumer/Operator Product Registration card filled out and sent to the Customer Service department at SNAPPER when completed. CAUTION: Cutting blades are extremely sharp. Wear heavy leather gloves when handling or working with blades. Be careful to avoid cutting yourself on sharp edges of blade.

STEP 1: Remove unit from carton and unfold handle. Do this carefully to prevent cables from hanging up or becoming kinked. It will be necessary to remove cardboard isolators between the handles and knobs. Tighten Handle Knobs securely. See Figure 1.

STEP 2: Holding engine control bail down and at the same time, pull engine rope handle and wrap pull cord into rope guides that are located on handles. See Figure 1.

STEP 3: Tip mower back against the upper handle to gain access to cutting blade. Remove foam shipping block from cutting blade. This must be removed before starting the engine.

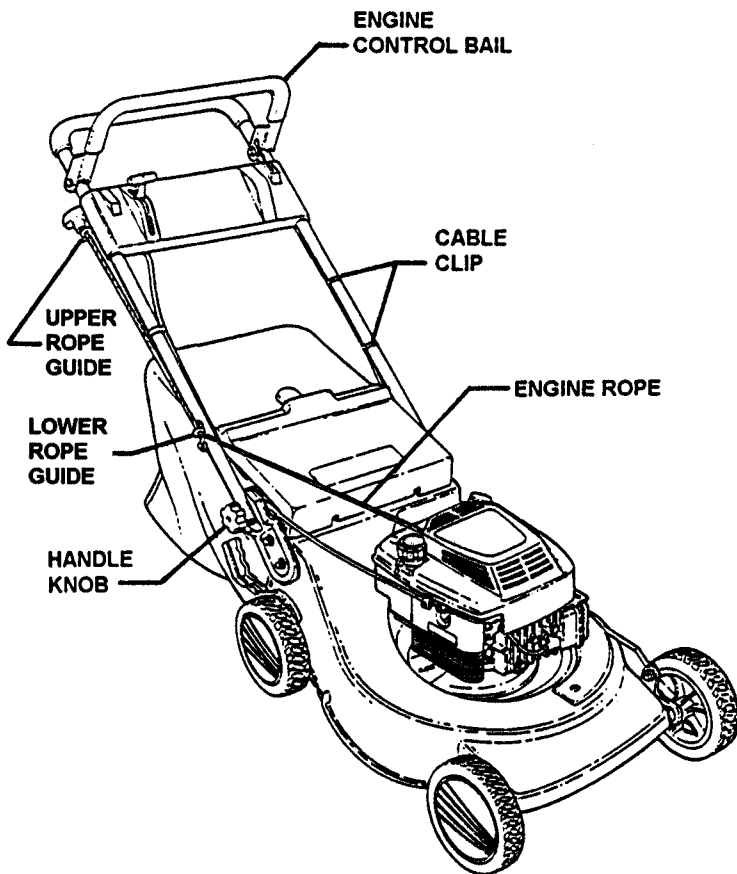


FIGURE 1

STEP 4: With grass catcher and catcher frame assembly upside down (plastic bottom turned up), insert bag frame assembly into catcher as shown in Figure 2. Fasten "C" shaped plastic edge strip located on front of bag around frame assembly on all four sides. Make sure edge strip is fastened securely.

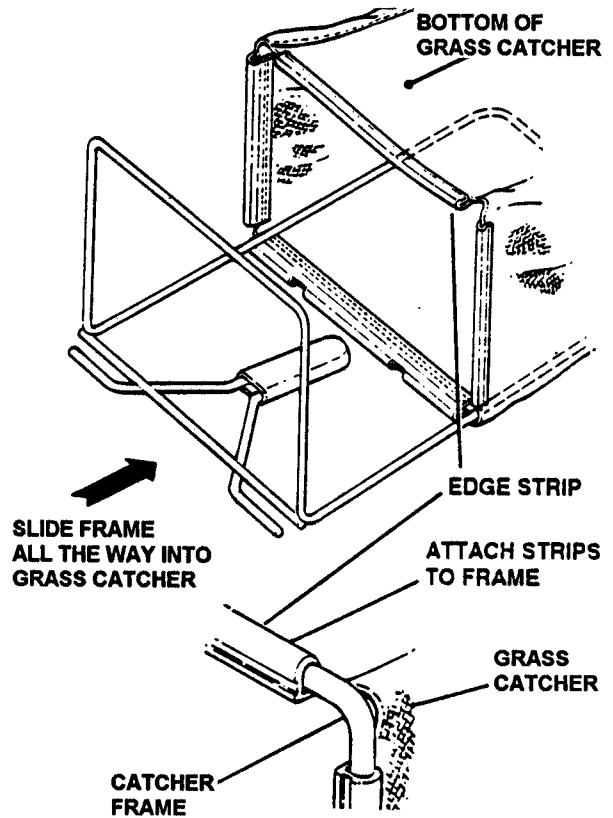


FIGURE 2

STEP 5: Install grass catcher to mower as follows: Lift discharge door, then grasp handle and hold grass catcher/frame up while placing rod ends over tabs at rear of mower deck. Release discharge door. See Figure 3.

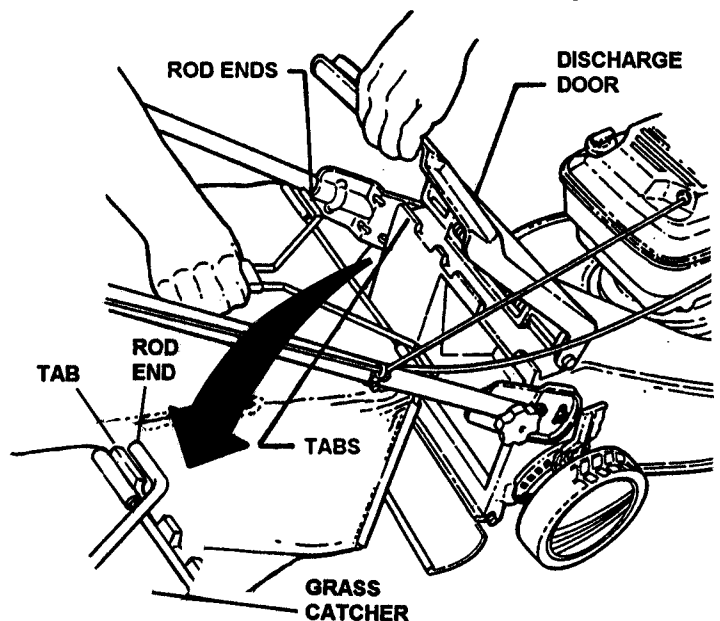


FIGURE 3

DEALER PRE-SALE CHECKLIST for SNAPPER 21" SERIES 0 REAR DISCHARGE WALK BEHIND MOWERS

The following must be accomplished prior to sale. Review this list with purchaser & check (✓) items as actually performed and signed below.

SET-UP (Details on Page 1 of this Instruction)

- ☐ FOAM SHIPPING BLOCK removed from cutting blade.
- ☐ UPPER HANDLE & LOWER HANDLE secured in place and hardware tightened securely.
- ☐ SIDE CHUTE, RECYCLING COVER or GRASS CATCHER installed on mower.
- ☐ BLADE retaining bolt(s) checked and tighten securely.
- ☐ BATTERY, electrolyte added to proper level, charged and installed. All cables connected (Electric Start Models).

LUBRICATION

- ☐ ENGINE OIL added to bring level up to full mark on 4-cycle engines (Refer to Engine Manual).
- ☐ OIL mixed with FUEL in specified ratio (2 Cycle Engines Only).

OPERATIONAL TEST

- ☐ ENGINE started, engine control settings checked and adjusted as needed.
- ☐ WHEEL DRIVE checked for proper operation and adjusted as needed (Self-Propelled Models).
- ☐ GROUND SPEED control checked (Self-Propelled Models).

CPSC (Consumer Product Safety Commission) COMPLIANCE TEST

- ☐ BLADE CONTROL stops engine when released.

DEALER'S RECORDS & FINAL CHECK

- ☐ PERSONALLY HANDED Operator's Manual & Mower Safety Booklet to purchaser.
- ☐ INSTRUCTED purchaser to read and follow instructions in Operator's Manual.
- ☐ DEMONSTRATED proper starting procedure and operation of mower to purchaser.
- ☐ INSTRUCTED purchaser how to service air cleaner, maintain oil level (4-cycle), or mix oil (2-cycle).
- ☐ ASSISTED purchaser in completing Product Registration Card.

CONSUMER/OPERATOR PRODUCT REGISTRATION CARD

Purchase Date _____ Model _____ Serial No. _____

Retailers Name _____ Signature _____

Address _____ City _____ State _____ Zip _____

MOWER WILL BE USED COMMERCIALY? _____ YES _____ NO

Purchaser's Name _____ Signature _____

Address _____ City _____ State _____ Zip _____

IMPORTANT: This form is to be retained by the Dealer for future reference regarding Warranty, proof of purchase, traceability for product recall or service, etc. Complete the Product Registration Card and Mail to Customer Service Department at SNAPPER, McDonough, Georgia, 30253.