

# INSTALLATION INSTRUCTIONS

REAR ATTACHMENT HITCH  
MFG. NO. 1692010

## INSTALLATION

Note: Electric Lift Kit (1692032) must be installed on 14GTG/1714G tractors for all rear-mounted attachments.

1. Install the upper hitch assembly (A, figure 1) to the rear tractor frame using four spacers (B), washers (C) and 1/2-13 x 2 1/2" capscrews (D). Secure on inside of frame with 1/2-13 nyloc nuts. The front capscrews are mounted in the top frame holes and the rear capscrews are mounted in the bottom frame holes as shown in figure 1.

2. Install the lower hitch assembly (E) to the tractor drawbar (F) using two 1/2-13 x 1 1/2" capscrews (G) and two i/2-13 nyloc nuts.

Secure the lower hitch brace to the rear frame using two 5/16-18 x 1" capscrews (H) and two 5/16 locknuts.

3. After the electric lift is installed, the lift rod (A, figure 2) will be installed to the upper hitch as shown in figure 1 and to the lift arm assembly using a clevis pin (B) and safety clip (C) as shown in figure 2.

Note: If tire chains are to be used for tiller operation, rear wheels should be inverted for additional clearance between RH wheel/chain and tiller lift rod.

Rear hitch required for mounting tiller to 14GTG/  
16GTH/1700 Series tractors attachment.


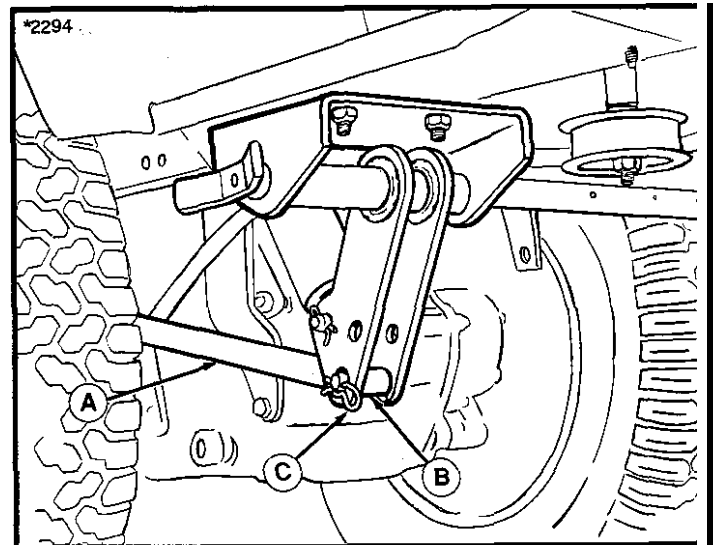


FIGURE 2. Electric Lift

- A. Lift Rod
- B. Clevis Pin
- C. Safety Clip

FIGURE 1. Rear Hitch

- A. Upper Hitch Assembly
- B. Spacers
- C. Washers
- D. Capscrews, 1/2-13 x 2 1/2"
- E. Lower Hitch Assembly
- F. Drawbar
- G. Capscrews, 1/2-13 x 1 1/2"
- H. Capscrews, 5/16-18 x 1"

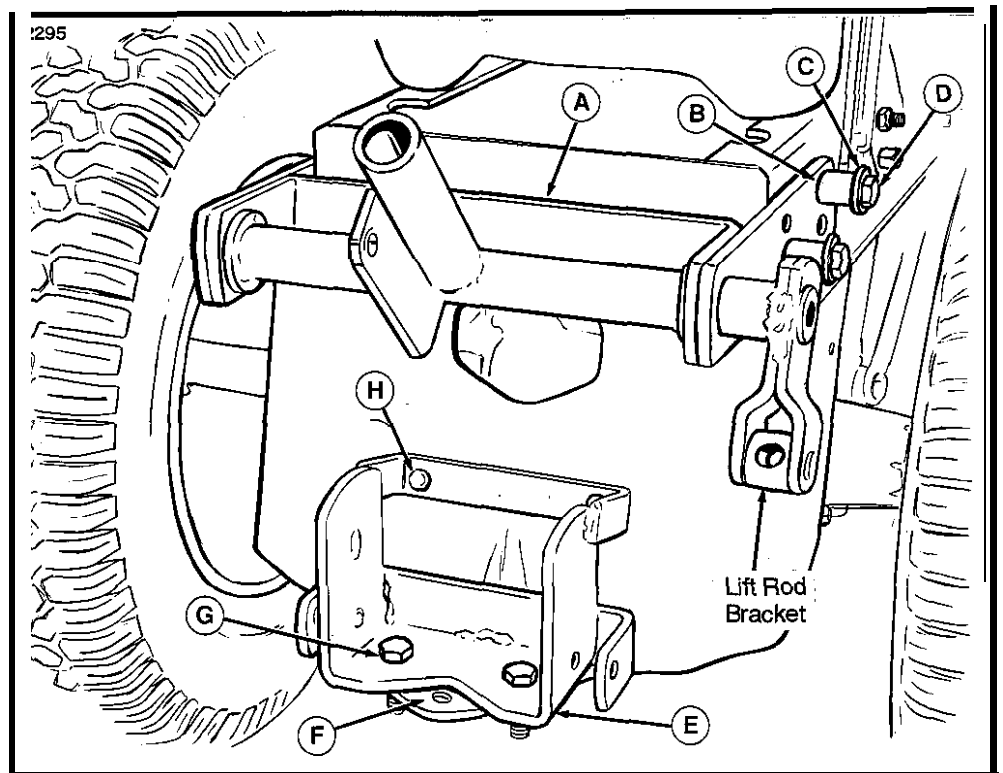

# INSTALLATION INSTRUCTIONS

REAR ATTACHMENT HITCH  
MFG. NO. 1692010

## INSTALLATION

Note: Electric Lift Kit (1692032) must be installed on 14GTG/1714G tractors for all rear-mounted attachments.

1. Install the upper hitch assembly (A, figure 1) to the rear tractor frame using four spacers (B), washers (C) and 1/2-13 x 2 1/2" capscrews (D). Secure on inside of frame with 1/2-13 nyloc nuts. The front capscrews are mounted in the top frame holes and the rear capscrews are mounted in the bottom frame holes as shown in figure 1.
2. Install the lower hitch assembly (E) to the tractor drawbar (F) using two 1/2-13 X 1 1/2" capscrews (G) and two 1/2-13 nyloc nuts. Secure the lower hitch brace to the rear frame using two 5/16-18 x 1" capscrews (H) and two 5/16 locknuts.
3. After the electric lift is installed, the lift rod (A, figure 2) will be installed to the upper hitch as shown in figure 1 and to the lift arm assembly using a clevis pin (B) and safety clip (C) as shown in figure 2.

Note: If tire chains are to be used for tiller operation, rear wheels should be inverted for additional clearance between RH wheel/chain and tiller lift rod.

Rear hitch required for mounting tiller to 14GTG/  
16GTH/1700 Series tractors attachment.

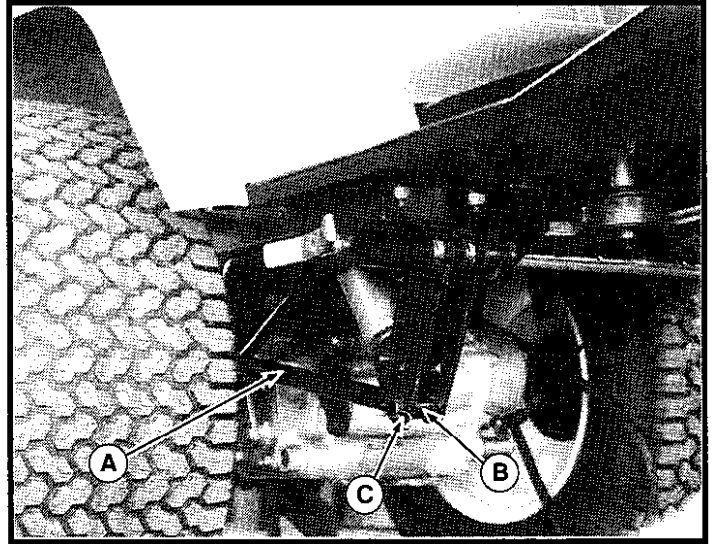


FIGURE 2. Electric Lift

- A. Lift Rod
- B. Clevis Pin
- C. Safety Clip

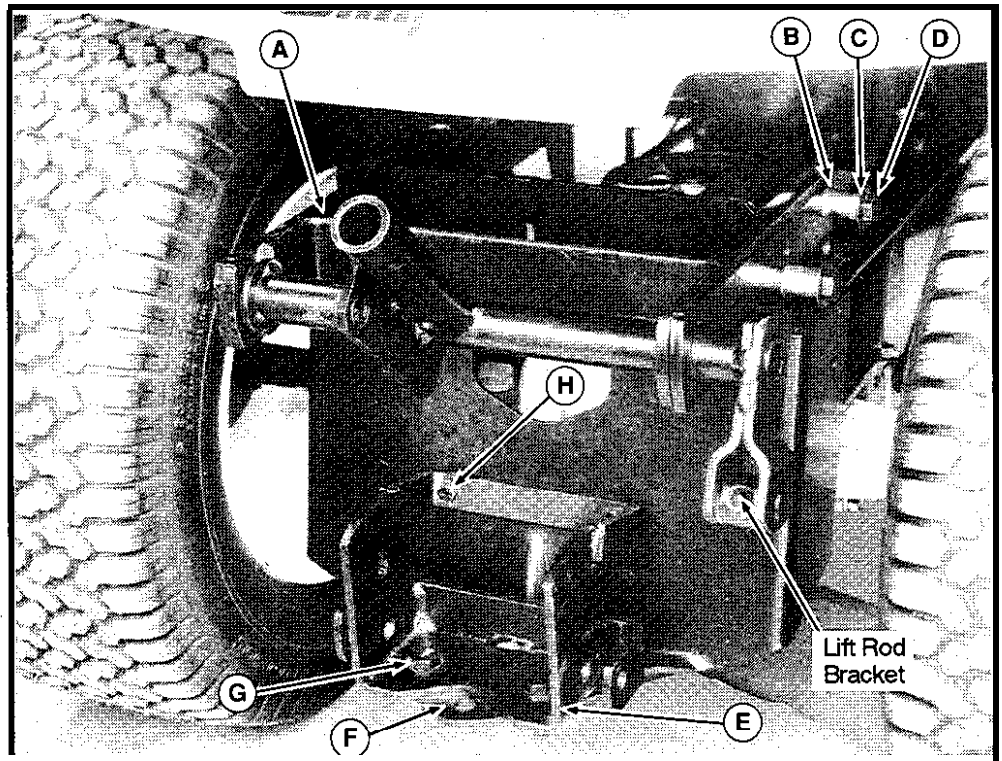


FIGURE 1. Rear Hitch

- A. Upper Hitch Assembly
- B. Spacers
- C. Washers
- D. Capscrews, 1/2-13 x 2 1/2"
- E. Lower Hitch Assembly
- F. Drawbar
- G. Capscrews, 1/2-13 x 1 1/2"
- H. Capscrews, 5/16-18 x 1"