

Simplicity[®]

**INSTRUCTIONS
AND PARTS LIST**

ARTICLE 171

ELECTRIC LIGHT KIT

for

MODEL 725

RIDING TRACTOR



SIMPLICITY MANUFACTURING COMPANY / PORT WASHINGTON, WIS.

will fit Rear Mounted Lamp
This clip mounted at rear lift assembly.


Switch only 915041 Their #
Tape this lead to right side of seat bracket, along frame, into clip with battery wire (N, fig .10), up between starter-generator and bracket (at bracket rear mounting bolt), to terminal (L) of voltage regulator.

Tape these insulators to prevent loosening by vibrations.

Mount on R. H. hood swivel.

To (L) on voltage regulator.

Insulate and wrap around grill bar for support.

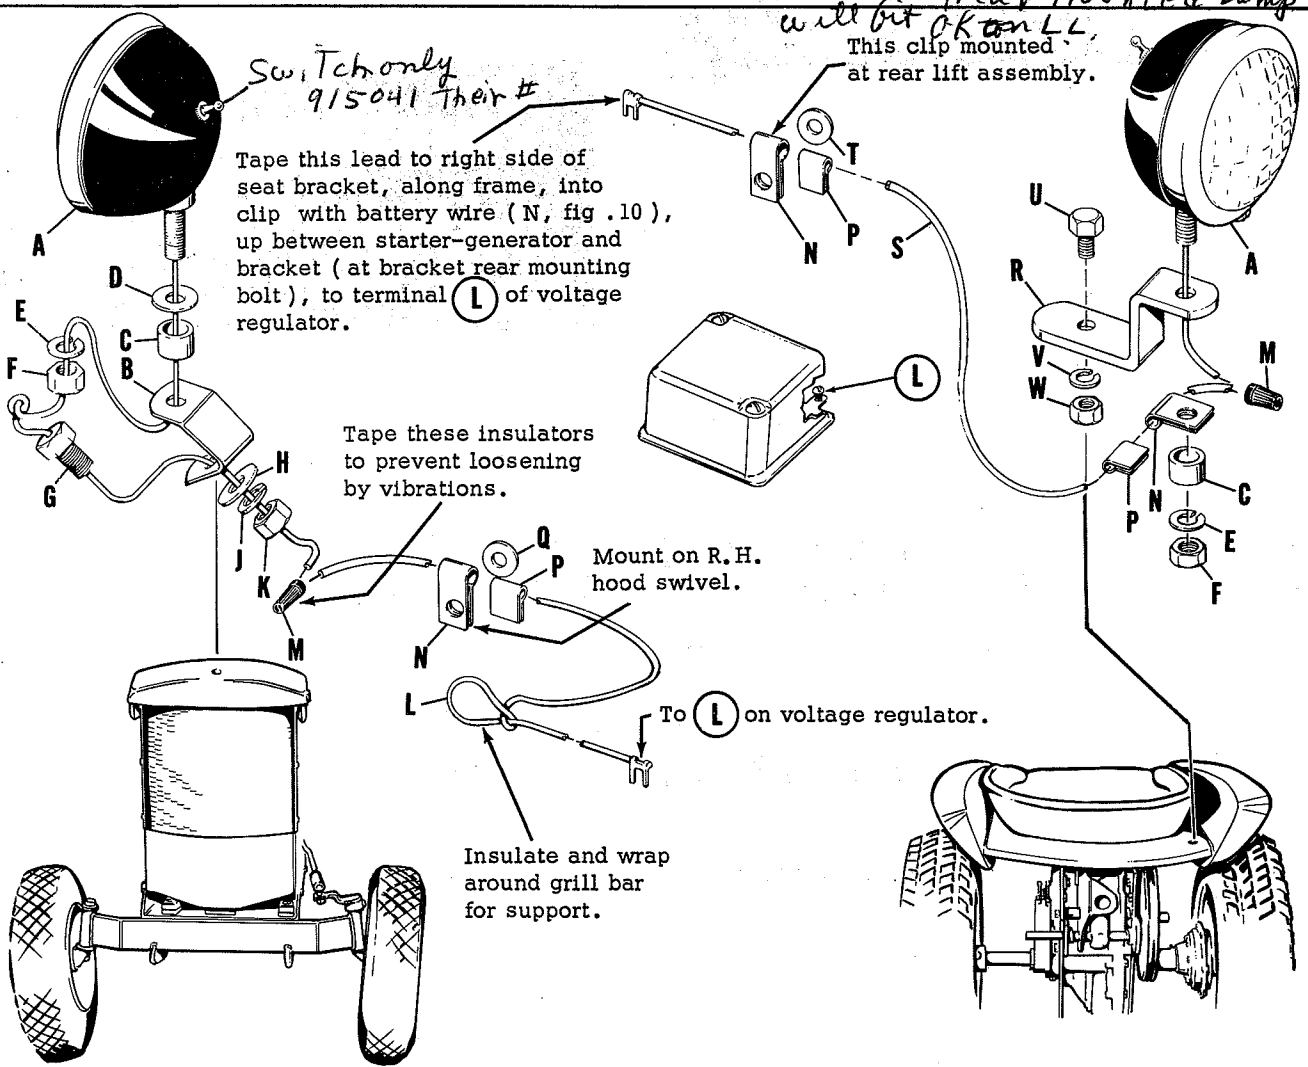


NOTE - As lamp ground is the "return circuit", all lamp and bracket mounting surfaces must be free of paint. Be absolutely certain wires do not rub on moving parts.

Reference Letter	Part No.	Description
A	122050	Lamp Assembly, Tractor
B	122112	Bracket, Front Lamp
C	122053	Spacer
D	121210	Washer
E	720004	Washer, Lock, 1/2"
F	717006	Nut, Full, Hex., 1/2"-13 NC
G	122054	Screw, Cap, Hex.
H	719003	Washer, Plain, 7/16"
J	720006	Washer, Lock, 7/16"
K	717009	Nut, Full, Hex., 7/16"-20 NF
L	122055	Wire, Regulator to Front Lamp
M	122058	Connector, Wire
N	8061117	Clamp, Wire
P	122059	Lining, Clamp
Q	719002	Washer, Plain
R	122113	Bracket, Rear Lamp
S	122056	Wire, Regulator to Rear Lamp
T	719001	Washer, Plain, 3/8"
U	705004	Screw, Cap, Hex.
V	720002	Washer, Lock
W	717003	Nut, Hex, Full

Seal Beam only 5948793
2.60

Simplicity®

REAR LIGHT MOUNTING INSTRUCTIONS
for
"700" & "725" TRACTORS
equipped with
BACK-REST TYPE SEAT & CAB

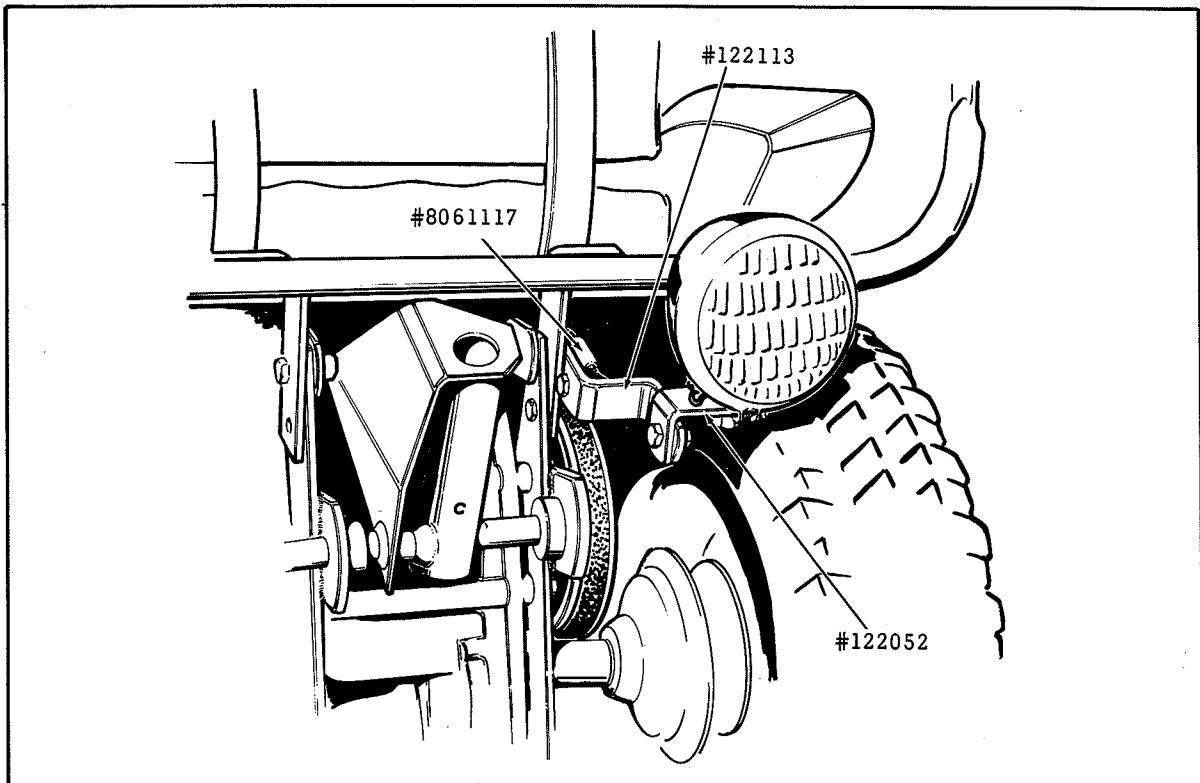

NOTE: To assure good electrical contact, remove the paint from the surfaces of the brackets at points of contact.

1. Attach the bracket #122113 to the outside of cab support member as shown in above illustration, and secure with a 3/8"-16 x 1-1/2" long hex capscrew and nut.
2. Bracket #122052 is now attached to the single hole end of bracket #122113 as shown, using a 5/16-18 x 1" long hex capscrew and nut.
3. Mount the rear light in position on the bracket #122052 and run the wire through clip #8061117. The clip is attached to bracket #122113 as shown, using a 5/16-18 x 3/4" long hex capscrew and nut.

Printed in U.S.A.

1950

1951

1952

1953

1954

1955

1956

1957

1958

1959

1960

1961

1962