

speco technologies™

Seven Zone 260 Watt Commercial Amplifier



PL-260A

| Features | Benefits |
|--|--|
| Seven 70 or 25 volt zone outputs with exterior switch selector | 7 different zones to control source access. Eliminates the need to open the unit to switch from 70 to 25 volts |
| Zonal on/off buttons on faceplate of amplifier | All zones can operate independently or all at once |
| 24 volt input for emergency back up power | PA system continues to work even in the event of power failure (with optional 24 volt battery) |
| 5 XLR MIC connectors with individual Phantom Power Switches | Add or delete phantom power depending on the individual microphone's requirement |
| Individual MIC volume controls on faceplate. | Separately adjust volume for each MIC |
| Master Volume Control | Control all outbound volume simultaneously |
| 3 Auxiliary RCA Inputs | Three different sources of music can be rotated and selected to play individually |
| Pre-amp Input | Allows a pre-amplifier connection |
| Booster & Auxiliary Outputs | Allows for an additional booster amplifier or mixer and broadcast recording |
| 4/8/16 Ohm Outputs | Hook up 4, 8 or 16-ohm speakers |
| MIC Override Function | Override function interrupts with an announcement or broadcast over background music. |
| Music on Hold Feature | Connect to a phone system so customers can hear music or a pre-recorded advertisement while on hold |
| Telephone Paging Input Balanced(0.1-1V 600 ohms) | Interfaces with a phone system so a page over amplifier's P.A. system can be made through the phone |
| Telephone Paging Input Level Control | Customize paging sound level |
| Separate Bass & Treble Faceplate Controls | Easily adjust the bass and treble of pre-recorded music |
| AC Accessory Input | Plug in amplifier accessories without an extra wall plug |
| CSA & UL Listed | Ensures quality and safety |

Specifications subject to change

For more information contact us at:

Speco Technologies 200 New Highway, Amityville, NY 11701 Web: www.specotech.com
 Toll Free: 1-800-645-5516 In Metro NY: 631-957-8700 Fax: 631-957-9142 or 631-957-3880

PL-260A




PL-260A

Seven Zone 260 Watt Commercial Amplifier

Specifications

- 260 Watts RMS
- Seven 70 or 25 Volt Zone Outputs
- Exterior 70/25 Switch Selector
- 24 Volt Input for Emergency Back Up Power!
- 5 XLR MIC Connector Inputs w/ Individual Phantom Power Switches
- 3 Auxiliary Inputs
- Pre-Amp Input/Booster Output
- Additional Auxiliary Output
- 4/8/16-Ohm Output Feature
- MIC Override Function
- Music on Hold Feature
- 1 Telephone Paging Input (0.1-1V 600 ohms)
- AC 117V/60Hz
- Seven Zone On/Off Selectors on Face Plate
- Separate Bass and Treble Controls
- 3.5"H x 16.9"W x 11.6"D
- CSA & UL Listed

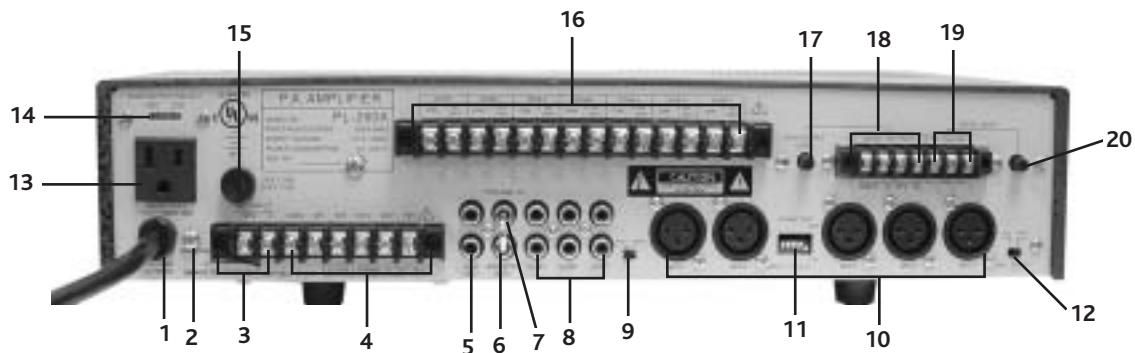

- | | |
|---|--|
| <ol style="list-style-type: none"> 1) AC power cord 2) Ground 3) 24 Volt DC input terminals, for battery backup 4) Speaker output terminals 5) AUX output RCA jacks 6) Booster amp out 7) Pre-amp/EQ/mix input 8) 3 Auxiliary input RCA jacks 9) AUX1/MIC5 input selector switch 10) 5 XLR MIC input connectors | <ol style="list-style-type: none"> 11) Phantom Power on/off switches 12) MIC-1 VOX on/off switch 13) AC accessory outlet 14) Zone output 25V/70V selector switch 15) AC fuse holder 16) Zone 1-7 output terminals 17) Music On Hold output level control 18) Music On Hold output terminals 19) TEL / PAGING input terminals (Balanced) 20) TEL / PAGING input level control |
|---|--|



For more information contact us at:

Speco Technologies 200 New Highway, Amityville, NY 11701 Web: www.specotech.com
 Toll Free: 1-800-645-5516 In Metro NY: 631-957-8700 Fax: 631-957-9142 or 631-957-3880