



Project: _____
 Location: _____
 Item #: _____
 Quantity: _____

Deep Well Horizontal Bottle Cooler

VDW MODELS —

Textured Steel Exterior
 with Stainless Steel
 Countertop.
 Galvanized Steel Interior.

VDW-24-4
VDW-37-12
VDW-50-18
VDW-65-24
VDW-95-38



VDW-50-18

Standard Features (all models)

- Textured Steel Exterior with Stainless Steel Countertop
- Galvanized Steel Interior
- High-Density, Polyurethane Foam Insulation
- Adjustable, Spring-Loaded, Vinyl-Coated Wire Product Dividers
- Horizontal Stainless Steel Insulated Lids Slide Under the Countertop into Rear Pocket
- Oversized Product Access Opening
- High-Impact PVC Top Rail
- Balanced, Self-Contained, Hermetically Sealed Refrigeration System
- Environmentally Friendly R-134a Refrigerant
- Maintains Ice-Cold Products 32°F to 38°F with Capacity to Spare
- Condensate Automatically Evaporated, No Plumbing Required
- Interior Floor Drain
- Pull-out Condensing Unit for Easy Cleaning and Servicing
- Anti-Corrosion Coated Evaporator Coil
- Direct Forced-Air Cooling System Chills Bottles on Top First
- Power Supply Cord and Plug Attached
- Mounted Bottle Opener and Cap Catcher

Cabinet:

The cabinet is constructed of a black, vinyl-coated steel exterior to maintain an attractive appearance for years of heavy use. Foamed-in-place polyurethane insulation throughout the cabinet ensures the ultimate in energy efficiency. Bottle cap opener and cap catcher is standard with all models.

Standard interior is galvanized steel. Included with the unit are adjustable, spring-loaded, vinyl-coated wire product dividers.

Top:

The top of the deep well bottle coolers includes an oversized product access opening, easy slide stainless steel insulated lid(s), a high impact PVC perimeter and a stainless steel countertop.

Refrigeration System:

The balanced, self-contained, hermetically sealed refrigeration system provides ample capacity to chill and hold products between 32°F and 38°F. The CFC free R-134a refrigerant is ozone friendly and environmentally safe. All condensate water is disposed of automatically by the energy efficient non-electric condensate evaporator, no plumbing is required. Cord and plug are provided.

Optional Features and Accessories


- Stainless Steel Exterior
- Pad Lock Hasps
- Heavy-Duty Swivel Casters with Brakes
- Remote Models Available
- Available in 5 different colors:
 - (CS) Sterling Silver
 - (CR) Candy Apple Red
 - (CG) Hunter Green
 - (CB) Victory Blue
 - Standard Black

Approvals:		Victory Refrigeration specification sheets are available online at www.victory-refrig.com .
------------	--	---

CHARACTERISTICS	VDW-24-4	VDW-37-12	VDW-50-18	VDW-65-24	VDW-95-38
Width, Overall	24 3/4	37	50	65	95
Depth, Overall	27	27	27	27	27
Height, Overall	33 3/4	33 3/4	33 3/4	33 3/4	33 3/4
Lids	1	1	2	2	3
Dividers	2	2	3	4	8
Cases (12 oz. cans)	7	18	23 3/4	34 3/4	55 3/4
Cases (12 oz. bottles)	4	12	18	24	38
Capacity Net (cubic feet)	21.5	23.7	46.5	48.0	70.1
Cabinet Voltage	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Condensing Unit Size (HP)	1/5	1/5	1/3	1/3	1/2
Total Amperes	5.6	5.6	8.4	8.9	11.8

crated dim. & wts.	Ht.	Width	Depth	Lbs
VDW-24-4	39 1/4	41	30	175
VDW-37-12	39 1/4	41	30	208
VDW-50-18	39 1/4	57 3/4	30	258
VDW-65-24	39 1/4	71 3/4	30	304
VDW-95-38	39 1/4	102 3/4	30	420

Dimensional tolerance ± 1/4" Metric dimensions (MM)

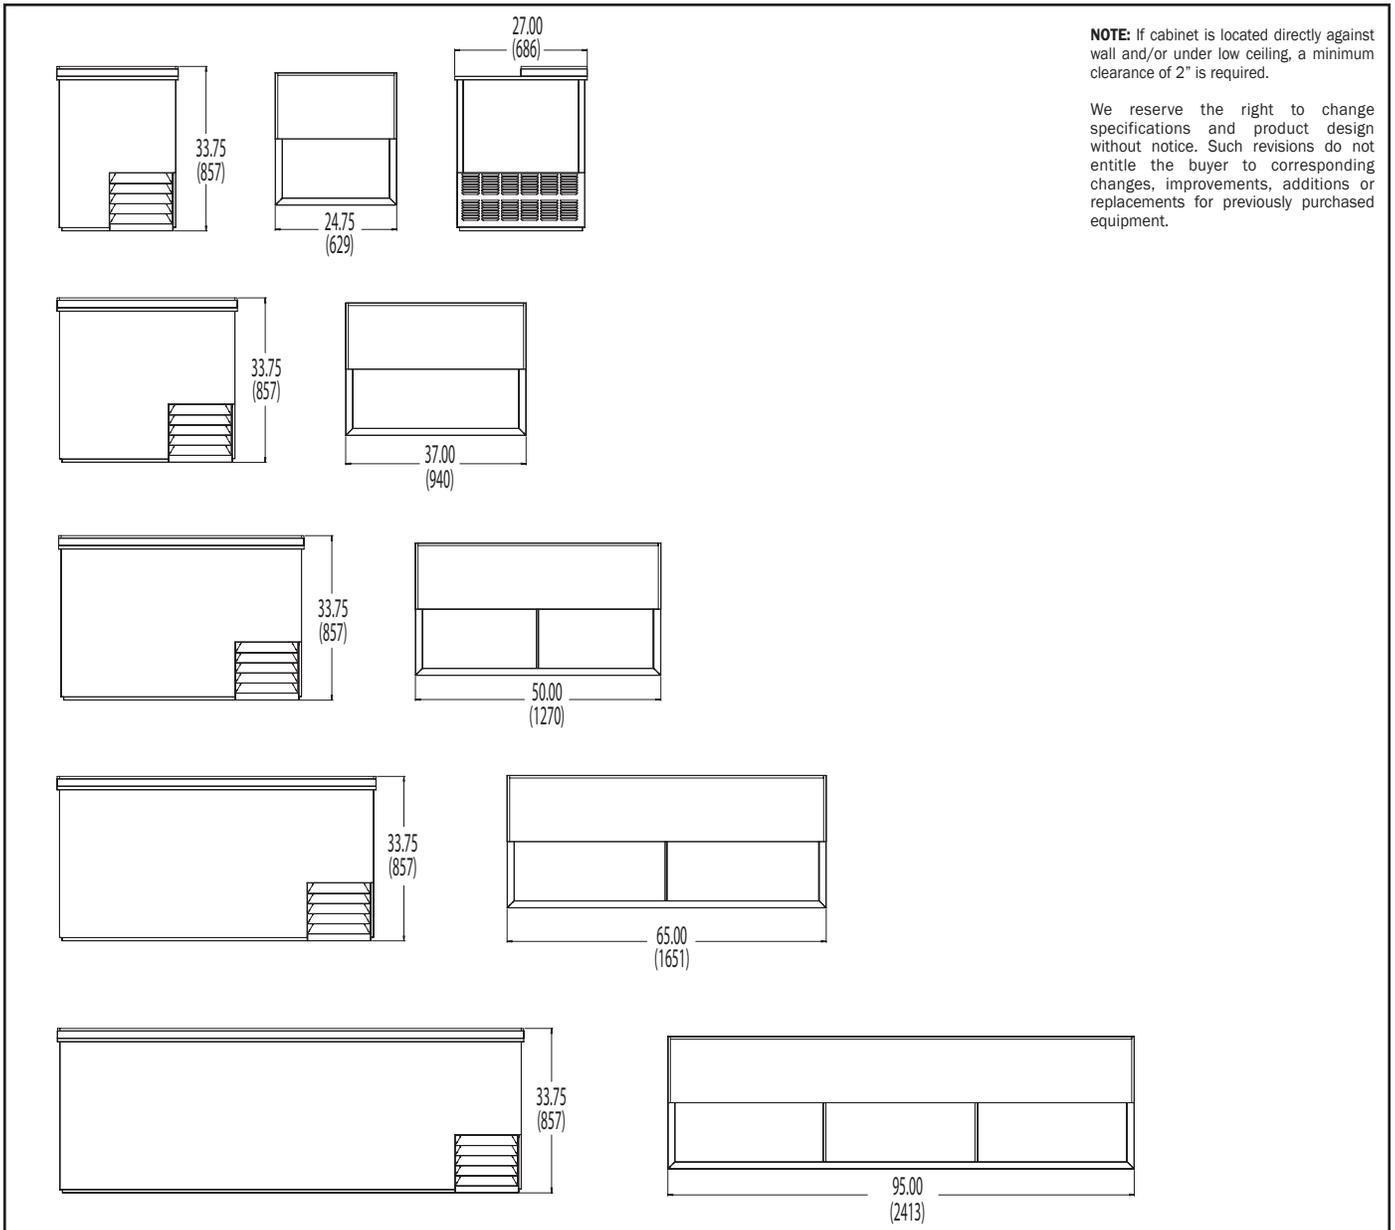

NOTE: If cabinet is located directly against wall and/or under low ceiling, a minimum clearance of 2" is required.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDA/FCSI recommended guidelines.