

CD Changers


CDX-838 CD Changer



- 8X Oversampling, 1-Bit D/A Converter
- Analog and Optical Digital Output
- Advanced Electronic Shock Protection (ESP)
- Fast Change 10-Disc Mechanism
- 110 CD Custom File Memory
- CD TEXT Disc/Track Title Capable
- Digital Servo Control
- 5-Way Adjustable Mounting Angle

General	
Output Terminals	UniLink BUS Control Output (8 pin) Analog Audio Output (RCA) Optical Digital Output (TOSLINK™)
Current Drain	800 mA (CD playback); 800 mA (during loading or ejecting a disc)
Operating Temperature	-10° C to 55° C (14° F-131° F)
Dimensions (w/h/d)	Approx. 262 x 90 x 189 mm (10 ³ / ₈ x 3 ⁵ / ₈ x 7 ⁷ / ₁₆ in.) (not including projecting parts and controls)
Weight	Approx. 2.1 kg (4 lb. 10 oz.)
Supplied Accessories	Disc Magazine (XA-250) (1) Parts for Installation and Connections (1 set)

CD Player Section	
System	Compact Disc Digital Audio System
Frequency Response	5-20,000 Hz
Signal-to-Noise Ratio	99 dB
Wow and Flutter	Below measurable limit
Laser Diode Properties:	
Material	GaAlAs
Wavelength	780 nm
Emiss. Duration	Continuous
Laser Out Power	Less than 44.6 uW (Measured at a distance of 200 mm from objective lens surface on Optical Pickup)

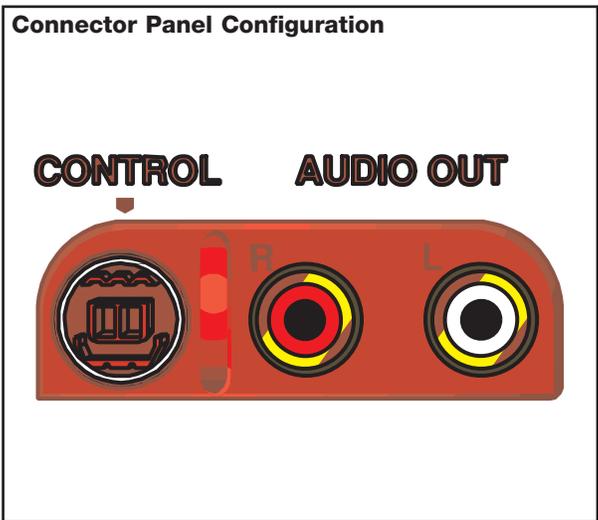

Design and specifications subject to change without notice.

CDX-838

CD Changer

