

SA8003

Stereo SA-CD / CD Player



Think of the SA8003 SA-CD/CD player as the beneficiary of continuous refinement. As good as previous 8xxx series of Marantz disc players were, the SA8003 moves several steps closer to that elusive Holy Grail that transports you to a vivid live performance. From its new disc tray and USB port for iPod® to Marantz's exclusive HDAM® circuitry, the SA8003 is your window into the souls of your favorite performers.


- Sophisticated new aluminum/reinforced resin front panel
- Zylon disc tray/precision drive
- MP3/WMA playback capability for CD-R and CD-RW discs
- USB input for iPod allows the SA8003 DACs to convert the iPods digital signal to analog
- Separate power supply and audio circuit boards
- Double-shielded Toroidal power transformer
- Audio circuits with HDAM®-SA2 modules
- Audiophile-grade selected components
- High performance Cirrus Logic D/A converter
- Headphone output with current buffer amplifier
- Double layer bottom chassis
- Machined chassis-mount analog outputs with zero-impedance copper plate
- Copper shielded digital output circuit
- Detachable AC Cord
- Hand held remote controller

marantz®
LIFE AMPLIFIED™

SA8003

Stereo SA-CD / CD Player

FEATURES	
Disc Capacity	1
Playback Formats	Disc: SA-CD(Stereo), CD, CD-R/RW(CD-DAMP3/WMA), USB: MP3/WMA/WAV/AAC
HDAM	• SA2
Current Feedback Analog Stage	-
Power Transformer	Double-shielded large capacity Toroidal power transformer
Zero-Impedance Plate	•
Double Layered Bottom Plates	•
Audio DAC	Cirrus Logic CS4398
Display On/Off	•
Selectable Filters	-
SA-CD/CD Text	-
IN/OUTPUTS	
AUDIO	
Analog L&R Out	Unbalanced: 1 (Gold Plated Machined Brass)
Headphone Out	1 (with Level)
Digital Out	Coax: 1, Opt: 1
Digital In	-
Other In/Out	-
OTHER	
External Control	-
D-Bus Remote (RC-5) In/Out	1/1
SPECIFICATIONS	
SACD	
Format	1-Bit DSD
Sampling Frequency	2.8224MHz
Dynamic Range	112dB
Frequency Response	2Hz - 50kHz
THD	0.0020% (1kHz)
CD AUDIO	
Format	16-Bit Linear PCM
Sampling Frequency	44.1kHz
Dynamic Range	100dB
Frequency Response	2Hz - 20kHz (-3dB)
THD	0.0020% (1kHz)
GENERAL	
Color	Black
Front Panel	Aluminum/Glass-reinforced resin
Remote Control	Device Remote with Marantz Amp. Basic Control Function
Power Requirement	AC 120V 60Hz
Power Consumption	25W (Standby: 0.5W)
Dimensions W x H x D (Inches)	17-5/16" x 4-5/16" x 13-9/16"
Weight (lbs)	17.2

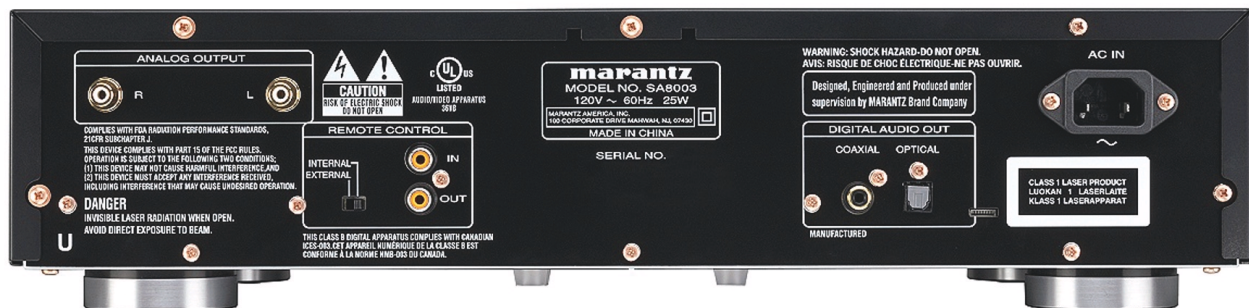

marantz®

LIFE AMPLIFIED™

*All specifications, dimensions and weights are subject to change without notice.
 D&M Holdings, Marantz, Marantz America, Inc. or any of its subsidiaries will not assume any liability for errors in this spec sheet which may result in consequential errors being made by retail dealers, designers, custom installers, cabinet makers or end users, etc based upon information contained within this document.

©2008 Marantz America, Inc. • www.marantz.com