



nanofinder

NT1000C User Manual

Prepared by: Nanomatic-Marketing

Date: 21 Jul, 2011

Notes: For End User

Support Tel: +852 2802 3983

Support email: support@nanomatic.net

Nanomatic Limited

www.nanomatic.net

Asia (Head Quarter): 13/F, Jonsim Place, 228 Queen's Road East, Hong Kong **T** (852) 2802 3983 **F** (852) 2802 2213

Europe: 6/F, 20 Broadwick Street, London W1F 8HT, UK **T** (44) 87 0890 3613 **F** (44) 20 7504 8293

Americas: 440 N Wolfe Rd., Sunnyvale, CA 94085, USA **T** (1) 408 524 3009 **F** (1) 786 513 5707

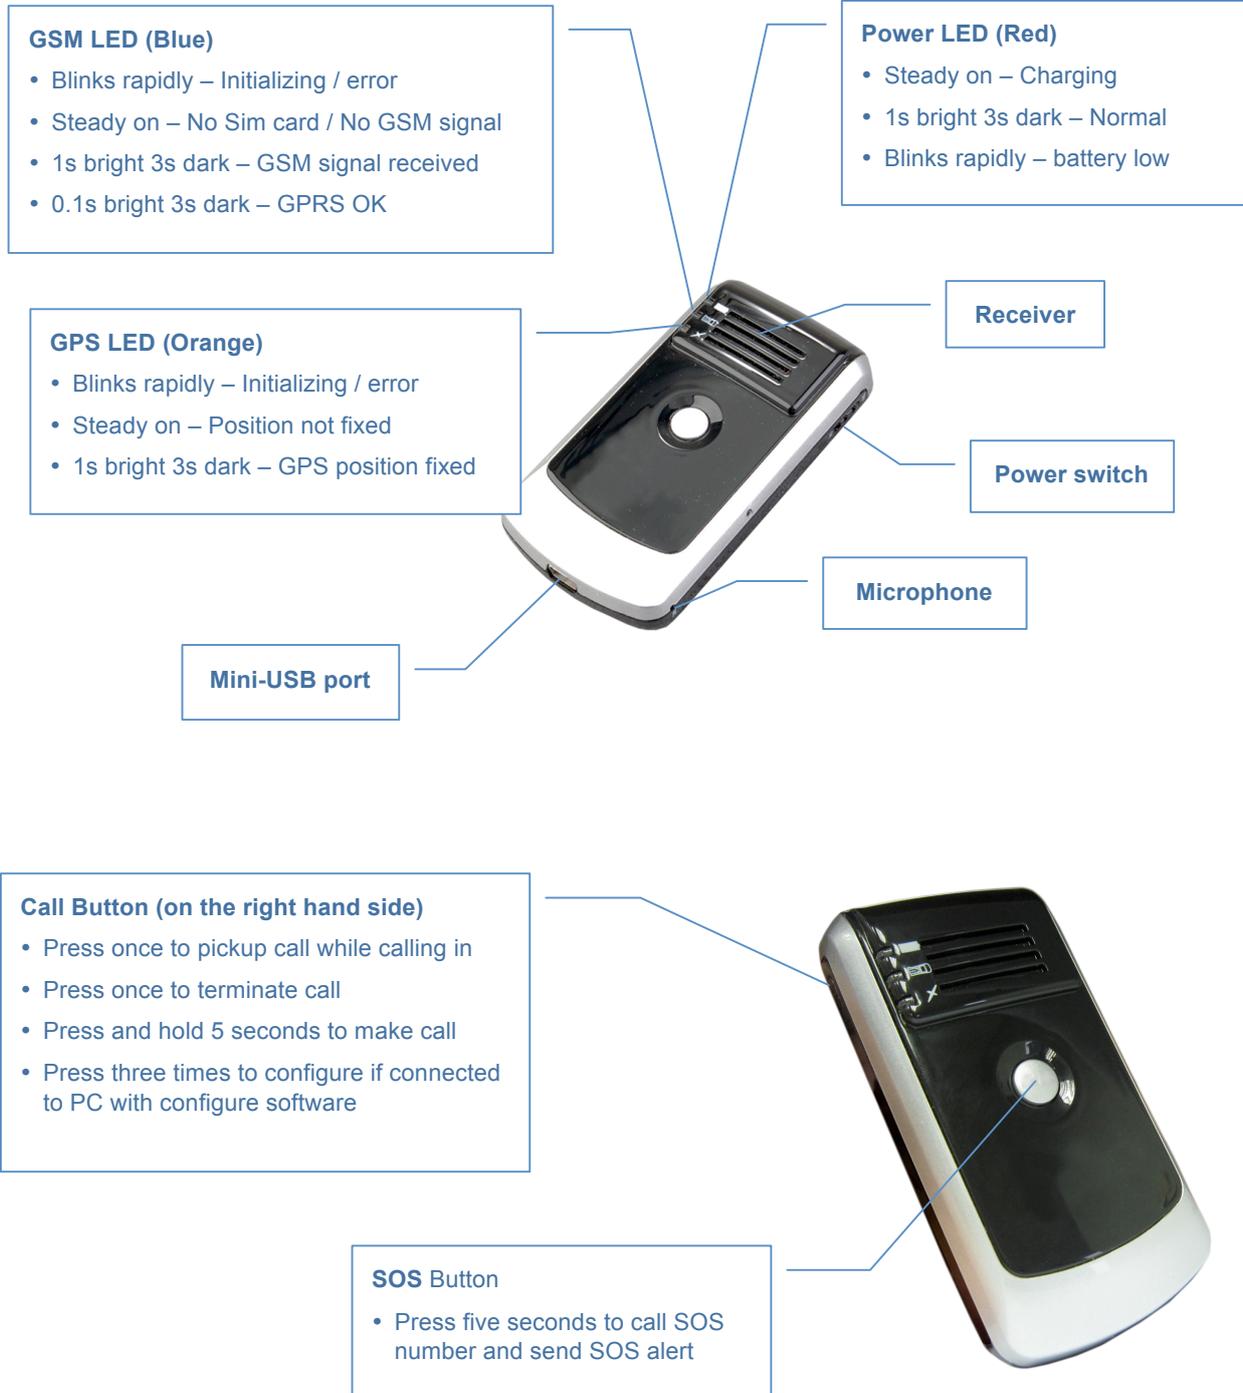


Table of Contents

Manual for NT1000C	2
Power Status	3
GPS Status	3
Network Status	3
Technical Data	3
How to assign NT1000C to your account via nanonavi-VC	4
How to assign NT1000C to your account via nanonavi-CC	7
How to assign NT1000C to your account via nanonavi-SN	8
How to assign NT1000C to your account via nanonavi-Web	9
Basic control menu for nanonavi-SN, nanonavi-Web	10
Auto Positioning	11
Geofence	11
Phone Number	11
SOS Button	11
Get Actual Position	11
Movement Sensor	11
Power Safe Mode	11



Manual for NT1000C





Status Light Chart

Power Status (RED)

Status	Meaning
1s on, 3s off	Normal
Blinks rapidly	Power low

GPS Status (Orange)

Status	Meaning
Blinks	GPS Fixed / Fixing
On	GPS module not works

Network Status(Blue)

Status	Meaning
Blinks	GSM signal received
On	No signal

Technical Data

- GPS-GSM / GPRS / SMS-3Band
- a-GPS (indoor)
- Alert-Button
- Motion-Sensor
- Speaker / Microphone
- Sleep-Mode
- Low power consumption / rechargeable battery
- Support GSM / GPRS / TCP / UDP
- Compact size (44 X 22 X 86mm)
- Light weight (70g)
- Low power consumption
- Fast signal acquisition
- 3 LEDs show GPS, GSM, Power status
- One Mini USB port, with DC 5V 400mA Battery charging port
- Geo-fencing to alert movement beyond a defined radius
- Accessories includes USB Cable, Battery, Ac Adaptor, Car Charger and CD




How to assign NT1000C to your account via: (need to be a current subscriber of Virtual Care services)


nanonavi-VC

(available to current subscribers of Virtual care service only)

1. Tap the marker of yourself on the map

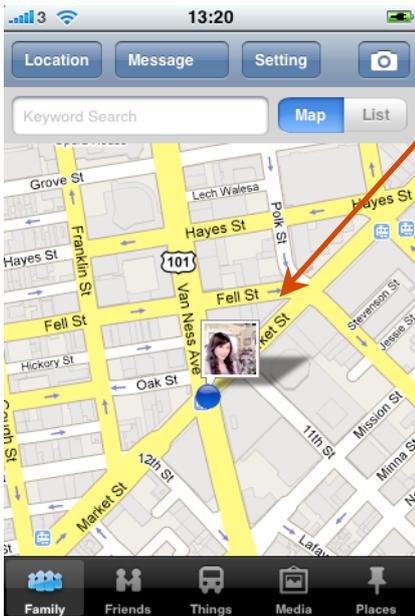

2. Tap the arrow to go to the profile

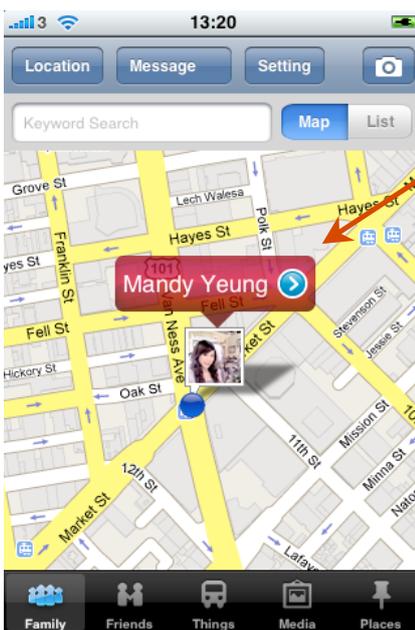



3. Tap **Virtual Care**




4. Tap **Assign nanofinder**





5. Tap the row of the new device you want to add. You have new successfully assigned a nanofinder.

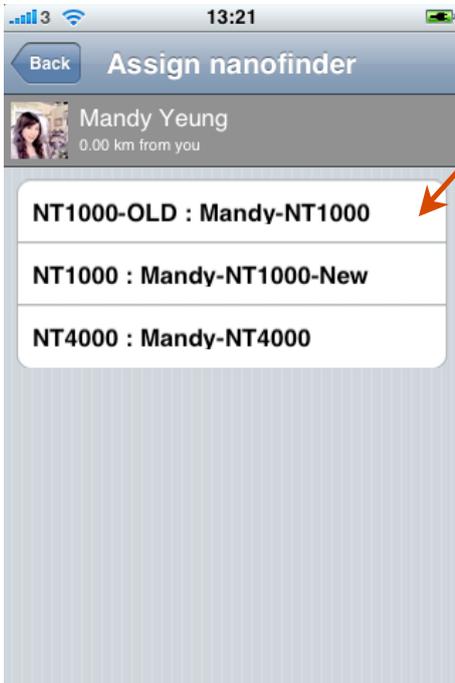


NOTE: FOR MORE INFORMATION PLEASE VISIT THE RESPECTIVE SUPPORT PAGE at www.nanonavi.com/en_support.php



nanonavi-CC

(available to operator only)

- For operator, please login to www.nanonavi.com/cc
- Login with the provided Call Center Name
- Login with the provided Operator ID
- After login, you will see some basic function buttons at the top of the left side
- Add nanofinder
nanofinder name – this is the name of the nanofinder that will be shown on the web page
IMEI – IMEI is a number unique to every nanofinder
Activation code – This is the code that provided by Nanomatic Ltd
- Nanofinder – Event Action is what operator needs to do when the nanofinder triggers predefined event. Predefined events are SOS, Geofence and Battery Low.

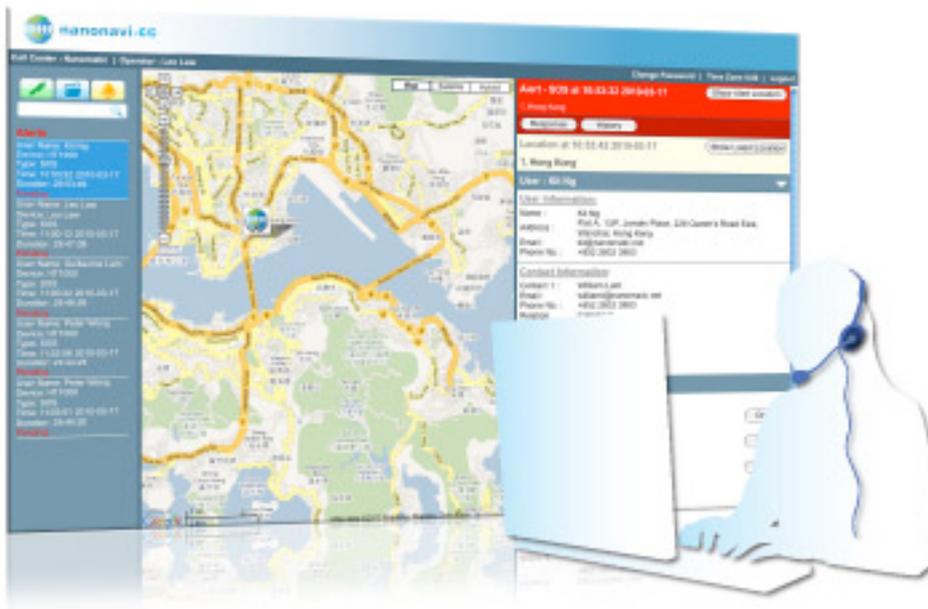




nanonavi-SN

- Login your favourite social network, search and download nanonavi application.
- Follow the on screen instructions to login and setting up your accounts.
- Add "a new object your wish to assign the nanofinder to the respective category of Family, friends (acceptance required) or Things OR choose an object.
- Click on the new object and choose "Virtual Care" at the pop up menu.

Click Assign / Unassign under "nanofinder"

If you have multiple devices, choose the available one and click assign.

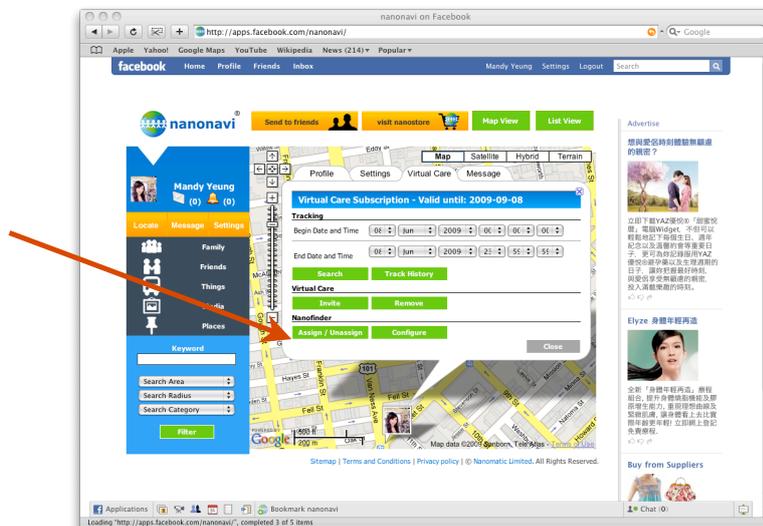




nanonavi-Web

(available to current subscribers of Virtual care service)

- a. Go to www.nanonavi.com/web
- b. Login with your user id & password
- c. Locate all friends on street/satellite maps and communicate with them directly.
- d. Find Family, Friends, Things, Media or points of interest close to user location.
- e. Geotag and share photos, videos and Points of Interest with friends.
- f. Establish a "Net of Care" by adding trusted family & friends from all user social networks into a users network of care providers.
- g. Track the location history of people, pets and possession being cared for.
- h. Move and assign small nanofinder devices to different people and possessions as needed.
- i. Communicate instantly with care providers and the person having the problems. Track the location history of people, pets and possession being cared for.
- j. Care providers are alerted right-away in case of a problem via their mobile-phone, social network or SMS.
(can show location on map for selected phones)
- k. Remote configuration and control of nanofinder & nanonavi-VC.
- l. Send alert message to phone and display location on map.

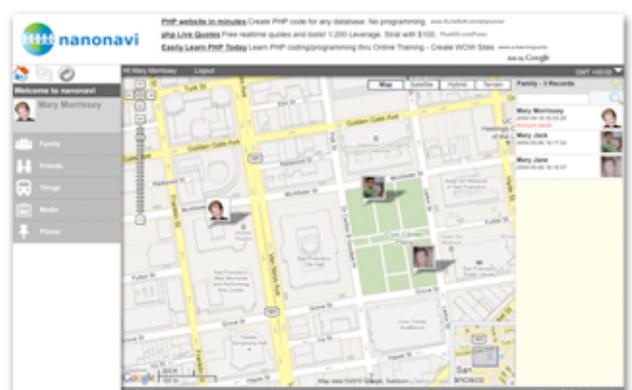



Basic control menu for nanonavi-SN, nanonavi-Web

(Please visit the respective support page for nanonavi-VC and nanonavi-CC)

Control Panel		Close
L9 Control Panel		
Auto Positioning	<input type="radio"/> Disable <input checked="" type="radio"/> Enable Time Interval: <input type="text" value="300"/> Seconds <input type="button" value="Submit"/>	
Geofence	<input type="radio"/> Disable <input checked="" type="radio"/> Enable <input type="radio"/> Inside <input checked="" type="radio"/> Outside Geofence radius <input type="text" value="1000m"/> <input type="button" value="Set Location"/> Geofence Latitude <input type="text" value="22.28945073780131"/> Geofence Longitude <input type="text" value="114.21459692880251"/> <input type="button" value="Submit"/>	
Help Number	Help Number <input type="text"/> <input type="button" value="Submit"/>	
SOS Number	SOS Number <input type="text"/> <input type="button" value="Submit"/>	
Alert SMS Numbers	Phone Number <input type="text"/> (with country code, without 0 & + prefix) Send button alert <input type="checkbox"/> Send geofence alert <input type="checkbox"/> Send movement alert <input type="checkbox"/> Send battery alert <input type="checkbox"/> <input type="button" value="Submit"/>	
Get Actual Position	<input type="button" value="Submit"/>	
Movement Sensor	<input checked="" type="radio"/> Disable <input type="radio"/> Enable <input type="button" value="Submit"/>	
Power Saving Mode	<input checked="" type="radio"/> Disable <input type="radio"/> Enable <input type="button" value="Submit"/>	



Auto Positioning

User can Disable or Enable the Auto-reporting function.
The report interval is **10s to 3600s**.

Geofence

User can Disable or Enable the Geofence function.
Alert will be sent to server when the nanofinder[®] goes inside / outside the Geofence Radius.

Phone Number

User can set up to 1 phone number, 1 SOS number and 1 SMS Alert number.

SOS Button

User can send SOS Alarm.

Get Actual Position

User can make a request to get current nanofinder[®] position.

Movement Sensor

User can Disable or Enable movement sensor.
A movement alarm message will be sent.

Power Safe Mode

Send current location to server when movement detected.