




YOUR SECURITY ROBOT COMPANY

## User Manual

| www.amaryllo.eu | sales.ai@amaryllo.eu | support.ai@amaryllo.eu |  
© 2015 Amaryllo International B.V. All Rights Reserved.

6007150000110 V1.0

- Install the camera
  - Operate the camera App
  - Control the camera rotation (for remote models)
  - LED indication
  - Setting
  - Troubleshooting
  - Installation instructions (for remote models)
  - How to use iCare remote control
- 1



Switch on your phone's Wi-Fi

Download

Connect your phone to a router

Please download app called "Amaryllo" to install our products.

2

- Install a new camera
  - Obtain from another device
  - Install a new camera (with pre-configured network)
- 3


### What Amaryllo product are you installing?



4

### Power on

iCam / iBabi / iCare

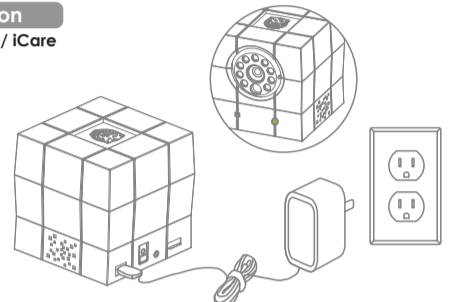


Connect the micro USB cable to a power outlet. The blue LED light will be on when the camera is powered. Wait for it to start flashing before beginning installation.

5

### Power on

iCamPRO

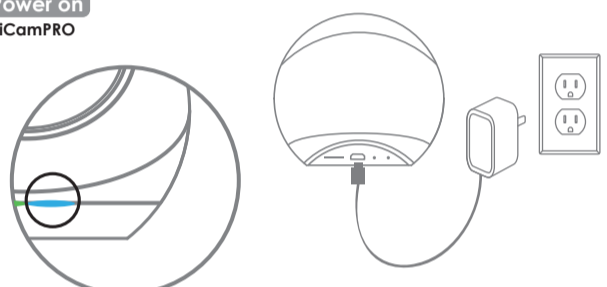

Connect the micro USB cable to a power outlet. The blue LED light will be on when the camera is powered. Wait for it to start flashing before beginning installation.

6

### Power on

iCamPRO Deluxe


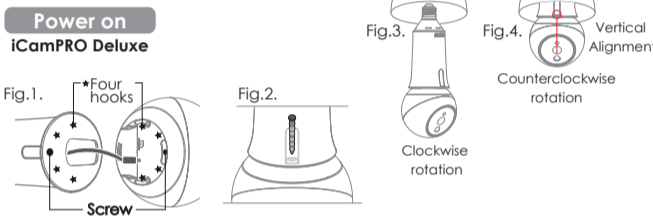


Fig.1. Connect the micro USB cable to the iCamPRO Deluxe. Align Deluxe to the holder through the four hooks.  
Fig.2. Secure Deluxe to the holder with a screw as shown.  
Fig.3. Screw in the Deluxe in a clockwise motion till it is fixed.  
Fig.4. Rotate in a counterclockwise direction to the desired viewing angle. Do not overpower the stopper when the device rotates to the end.  
**Turn off the light switch. This will prevent you from being electrocuted.**  
**Turn on the light switch, after which the blue LED light will turn on indicating it is powered on. Wait for it to start flashing before beginning the installation.**

7


### Power on

iSensor / Patio

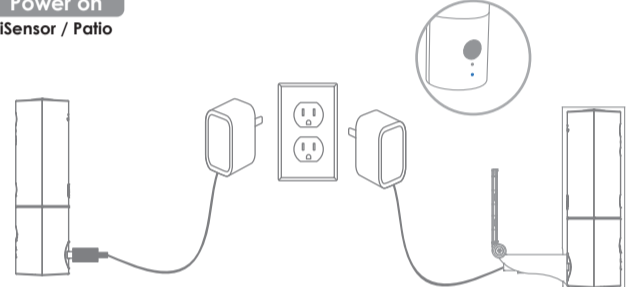

Connect the USB cable to a power outlet. The blue LED light will be on when the camera is powered. Wait for it to start flashing before beginning installation.

8

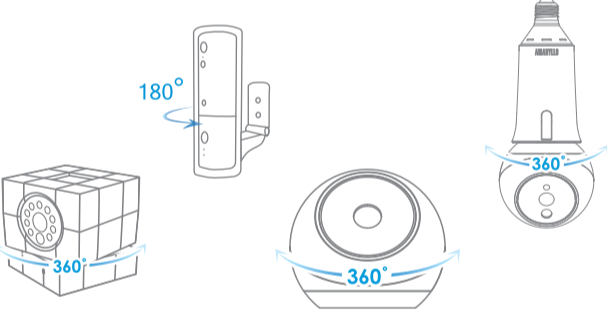

After power-on, it will take 25 seconds to start calibration cycle. (for remote models)

9

Enter the password of your Wi-Fi router

Password




10

### Scan QR code

iCam / iBabi / iCare

Follow few steps below to complete scanning QR code.

- Your device will automatically generate a QR code.
- Place the camera 4" ~11.8" (10~30 cm) in front of the smartphone's QR code or 7.8" ~11.8" (20~30 cm) in front of tablet's QR code. Please wait for a beep to confirm reception. After you hear a beep, you can put the phone down.



Make sure the lens is clean


Make sure your device and the camera are parallel to each other.

11

### Scan QR code

iCamPRO

- Your device will automatically generate a QR code.
- Place the camera 4" ~11.8" (10~30 cm) in front of the smartphone's QR code or 7.8" ~11.8" (20~30 cm) in front of tablet's QR code. Please wait for a beep to confirm reception. After you hear a beep, you can put the phone down.

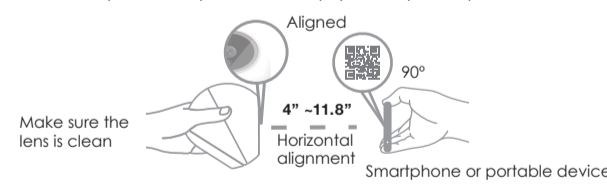

Make sure the lens is clean

Make sure your device and the camera are parallel to each other.


12

### Scan QR code

iCamPRO Deluxe

Follow few steps below to complete scanning QR code.

- Your device will automatically generate a QR code.
- Place the camera 4" ~11.8" (10~30 cm) in front of the smartphone's QR code or 7.8" ~11.8" (20~30 cm) in front of tablet's QR code. Please wait for a beep to confirm reception. After you hear a beep, you can put the phone down.



Make sure the lens is clean


Make sure your device and the camera are parallel to each other.

13

### Scan QR code

iSensor / Patio

- Your device will automatically generate a QR code.
- Place the camera 4" ~11.8" (10~30 cm) in front of the smartphone's QR code or 7.8" ~11.8" (20~30 cm) in front of tablet's QR code. Please wait for a beep to confirm reception. After you hear a beep, you can put the phone down.

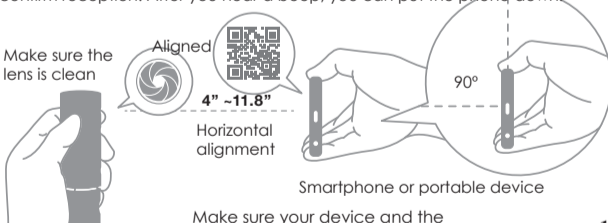

Make sure the lens is clean

Make sure your device and the camera are parallel to each other.

14

iOS



Android



The timer will show the remaining time to finish the installation. If time runs out, you will need to start the installation over again.

15

- You will hear one beep when the camera install QR completes.
  - You will hear two beeps when the camera setup completes.
  - The green LED remains on when Wi-Fi is working properly.
- 16

### If QR scan failed, it will ask:

Do you want to try again?  
You can press "Retry" to try again. It is recommended that you check your information and try again.


Check information
Retry

17

## Congratulations!


- The camera setup is complete. You will hear two beeps when the camera setup completes.

iCam / iBabi / iCare      iCamPRO      iSensor / Patio      iCamPRO Deluxe

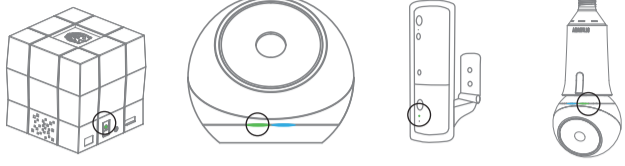

- The green LED remains on when Wi-Fi is working properly.

18

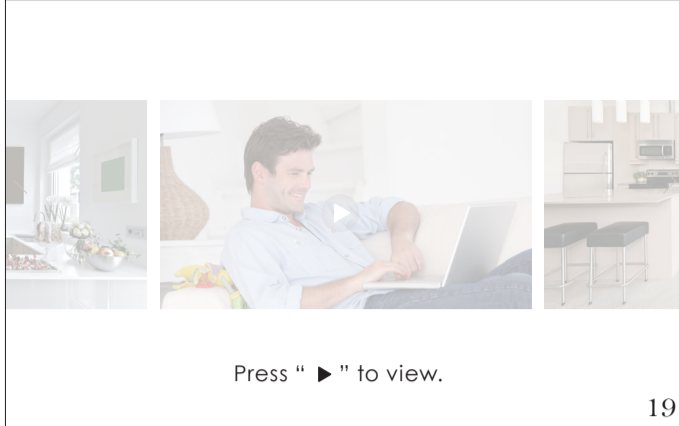

Press "▶" to view.

19

### Control camera

iCam / iBabi  
iCare / iCamPRO  
iCamPRO Deluxe



### By sliding your screen

Remotely pan and tilt the camera anywhere by sliding your smartphone screen in the direction you want the camera to turn.

20

### Control camera

iSensor / Patio



### By sliding your screen left or right

Remotely pan the camera anywhere by sliding your smartphone screen in the direction you want the camera to turn.

21

### LED indication

#### Blue LED:

- The LED is stable when you power on the camera.
- The LED flashes once per second when the QR scan is in progress.
- When LED is flashing twice per second, the camera is in use and someone is actively viewing it.
- When LED is flashing 3 times per second, the setup process was successful.

#### Green LED:

- When LED is flashing once per second, the camera is trying to connect to a Wi-Fi AP router.
- When LED is constant, the camera is connected to Wi-Fi and working properly.

22

Alert Detection

Wi-Fi

Viewers

Miscellaneous

Recording

Administrator

Cloud Upload

About the cameras

Audio

My Public Channel

Please visit our website [www.amaryllo.eu](http://www.amaryllo.eu)

to learn more about the settings.

23


### If connection fails

Please check:

- Is the camera powered on?
- Is the camera's Wi-Fi connected? (Green LED should be lit)
- Is a new Wi-Fi router required? (Press "📶")

24

### Reset

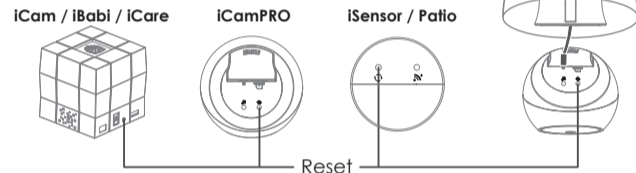


First, make sure the device is powered on and the calibration is completed. There is a small RESET hole. Press and hold for about 5 seconds until the blue LED flashes. All settings of previously stored in the camera will be erased, and it will be restored to the factory default. After 25 seconds, the camera will start a calibration mode by rotating itself. (for remote models)

25

### Install a new camera

(with pre-configured network)

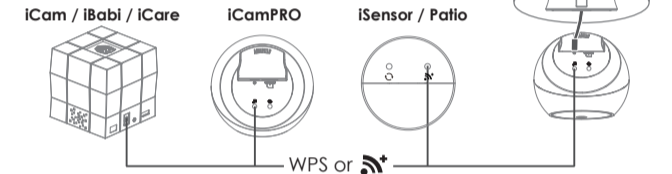


- Connect your phone to your router.
  - Press and hold router's WPS button.
  - Press and hold WPS or 📶 button on the camera for 5 seconds or longer. When the green LED flashes, it indicates that the camera has entered WPS mode.
  - Please follow App instructions step-by-step.
- Note: You need to press WPS or 📶 button of the camera and Wi-Fi AP router within 60 seconds.

26

### Operating temperature

iCamPRO / iCamPRO Deluxe

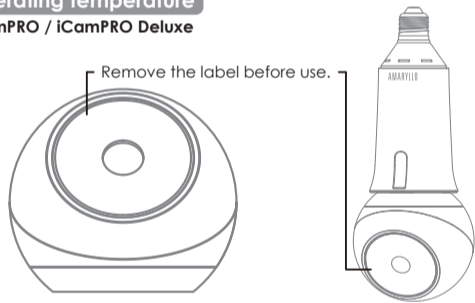


Operating temperature: 32 - 95°F (0 - 35°C), indoor use only

27

### Installation Instructions

iSensor

- Choose a location offering you the best viewing angle. Make sure that an electric outlet is within 2 meters.
- Use pencil to mark hole locations. Make sure holes are slightly smaller than anchors.
- Insert anchors to wall and secure holder to wall with screws.
- Place USB power plug into holder opening from the rear.
- Plug iSensor HD into USB adapter and adjust until proper angle is achieved.
- Tighten the holder screw if you adjust the holder angle.

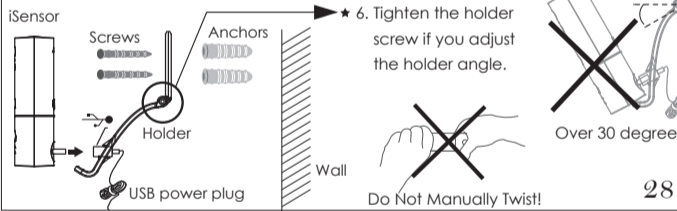


28

### Installation Instructions

Patio

- Choose a location offering you the best viewing angle. Make sure that an electric outlet is within 2 meters.
- Use pencil to mark hole locations. Make sure holes are slightly smaller than anchors.
- Insert anchors to wall and secure holder to wall with screws.
- Tighten the holder screw if you adjust the holder angle.

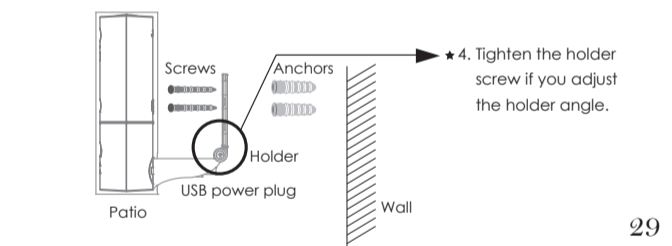


29

### Installation Instructions

iCamPRO

- Fig.1. Choose a location offering you the best viewing angle. Make sure that an electric outlet is within 2 meters. Use pencil to mark hole locations. Make sure holes are slightly smaller than anchors. Insert anchors to wall and secure holder to wall with screws.
- Fig.2. Align iCamPRO to the holder through the four hooks. **Secure iCamPRO to the holder with a screw as shown.**
- Fig.3. Adjust the angle of the holder and then tighten the hinge screw.

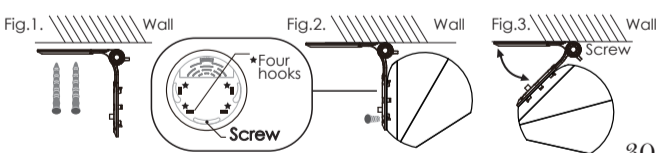


30

### Placement

Patio

Prolonged exposure to direct sun and moisture is not recommended. iSensor Patio should be placed under shaded area and avoid direct rain or snow.

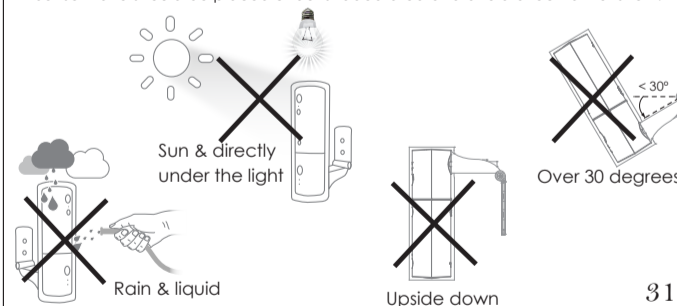


31

### How to use iCare remote control

iCare

- Fig.1. When an emergency occurs, press and hold the button until you hear a beep to send out urgent notification alert. You must be within 10 meters to enable the urgent call alert. Wait 3 seconds to press and hold the button again to disable.
- Fig.2. For best transmitting range, don't let your fingers block the antenna on the top of the transmitter as shown.

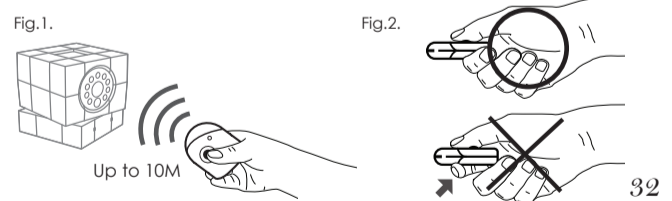

32

\* Warranty is voided if product is open.

\* Please visit our website [www.amaryllo.eu](http://www.amaryllo.eu) to view our warranty policy.

33