

Revolabs Single Channel Wireless Microphone System- Tandberg Edge 75/85/95 MXP Setup Guide

NOTES AND CAUTIONS:

This setup guide will guide you through the step needed to properly connect a Revolabs Single Channel System to a Tandberg Edge 75/85/95 MXP video codec.

1. Connecting the Cables
2. Configuring the Edge MXP Video Codec

Note: *It is important to carefully follow these instructions in order and completely. Otherwise your Single Channel System and/or the video codec may not function properly. Please read through these instructions completely before proceeding. Contact Revolabs technical support if you have any questions.*

Requirements for connecting systems:

1. Revolabs Single Channel System
2. Tandberg 880 MXP video codec
3. QTY 1 07-STEMIC-PPP Line-to-Mic Interface Cable*

* OPTIONAL FROM REVOLABS


NOTE: IMAGES OF SET UP SCREENS ARE DEFAULT SETTINGS FROM TANDBERG AND ARE PART OF THE TANDBERG MXP ADMINISTRATOR'S GUIDE © MAY 2008



Connecting the Cables

CONNECTING A REVOLABS SINGLE CHANNEL SYSTEM TO TANDBERG EDGE 75/85/95 MXP VIDEO CODEC

1. Connect the 07-STEMIC-PPP cable between the 2.5mm analog output of the Revolabs Single Channel to the MIC 1 input of the Tandberg Edge 75/85/95 MXP

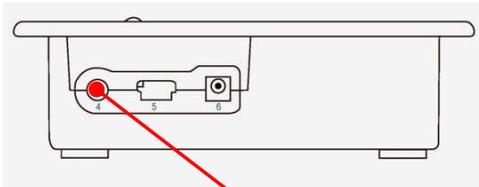

Configuring the Edge 75/85/95 MXP Video Codec

CONFIGURING THE AUDIO MENUS OF THE EDGE MXP VIDEO CODEC




1. Go to **AUDIO SETTINGS**
2. Select **INPUTS**
3. Confirm that **MIC 1** is **ON**



4. Adjust the audio Input Type Level if necessary (recommend +8dB)
5. Speak into the Revolabs microphones that are connected to MIC 1. The audio meter should peak at about 5dB for normal speech.



6. Return to previous menu and select **ECHO CONTROL**
7. Enable **MIC 1 Echo Canceller (ON)**

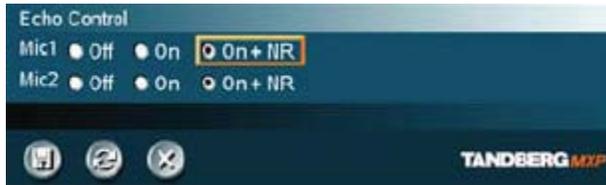

8. Return to previous menu and select **AUDIO LEVELING (AGC)**
9. Turn MIC Audio Leveling (AGC) **OFF**

