
User's manual

4035 telephone



User manual

Thank you for choosing one of our telephones, and for your confidence in **France Télécom**.

Your 4035 digital telephone offers you all the latest design features, so that it is very easy to use, while providing the most efficient means of communication.

Your easy-to-use 4035 telephone offers you:

- a receiver that is pleasant to use: it fits nicely in the hand with a flexible grip section,
- communication is even more convenient using the audio keys (loudspeaker, hands free),
- using the convenient alphabetic keypad, you can call your correspondents by name,
- transparent magnifying keys for immediate reading of your programmed settings (direct calls, functions, etc.).

Your ultra-efficient 4035 telephone offers you:

- a screen, with keys and a navigator, that displays your correspondent's number or name, and allows easy transition between functions (call transfer, three-way conference),
- screen-displayed call icons (busy, free, on hold) to help you manage your calls (switching between correspondents),
- a complete range of connection interface units for data transmission, assisted telephone applications (CTI*) or easy connection of analogue (fax, answering machine) or ISDN terminals (PC with ISDN board, G4 fax).

*CTI : Computer Telephone Integration

How to use this guide?

You have a 4035 digital telephone. The large display, navigator and alphabetic keypad will help you use your telephone easily and make optimum use of the many functions offered.

• Actions



Lift the receiver.



Hang up.



Description of an action or context.

• Navigator



Move the navigation key up, down, to the left or to the right.

• Display and display keys



Partial view of display.



Display key.

• Programmable keys and icons



Line key.



Icon corresponding to key.



Key programmed by technician to access service.

• Keypad



Numeric keypad.



Alphabetic keypad.



Specific key on numeric keypad.

• Audio keys



Loudspeaker.



Hands free.



Adjustment "reduce".



Adjustment "increase".

• Other fixed keys



Fixed key.



MENU key.

• Other symbols used



Alternative to action sequence.



Important information.

These symbols can be supplemented by small icons or text.

The features described in this manual and indicated with an asterisk (*) can only be accessed with some software versions.

For more details, please contact your France Télécom installer.

Contents

Getting to know your telephone	p. 8
--	------

I.

Using your telephone	p. 11
--------------------------------	-------

I.1 Making or answering a call without lifting the receiver (hands free)	p. 11
I.2 Making an outside call	p. 12
I.3 Making an internal call	p. 12
I.4 Calling your correspondent by name (company directory).	p. 13
I.5 Calling from your personal directory	p. 14
I.6 Calling from the common directory	p. 14
I.7 Receiving a call.	p. 15
I.8 Filtering calls using the voice mailbox	p. 15
I.9 Redialling*	p. 16
I.10 Temporarily storing a number to call again	p. 16
I.11 Requesting automatic callback if internal number is busy	p. 17
I.12 Answering an internal call in intercom mode.	p. 17
I.13 Sending DTMF signals	p. 18
I.14 Making an ISDN call.	p. 18
I.15 Hiding your identity (ISDN call)	p. 19
I.16 Identifying a malicious call (ISDN call)	p. 20
I.17 Activating the loudspeaker during a conversation (receiver lifted).	p. 21
I.18 Mute, so that your correspondent cannot hear you	p. 21

Contents

2.

During a conversation p. 22

- 2.1 Making a second call during a conversation p. 22
- 2.2 Answering a second call during a conversation p. 23
- 2.3 Transferring a call p. 24
- 2.4 Switching between calls (Broker call) p. 25
- 2.5 Three-way conference with internal and/or external correspondents (conference) p. 25
- 2.6 Placing a call on hold (hold) p. 26
- 2.7 Placing an outside call on hold (parking). p. 27
- 2.8 Getting information about camped-on calls p. 28
- 2.9 Intrusion into an internal conversation. p. 29

3.

Sharing. p. 30

- 3.1 Receiving supervised call ringing p. 30
- 3.2 Answering the general bell p. 30
- 3.3 Manager/secretary filtering p. 31
- 3.4 Call pick-up p. 31
- 3.5 Answering briefly in place of the operator. p. 32
- 3.6 Monitoring calls to other terminals p. 33
- 3.7 Hunting groups p. 33
- 3.8 Calling an internal correspondent on his/her pager. . . . p. 34
- 3.9 Calling a correspondent on his/her loudspeaker p. 34
- 3.10 Sending a written message to an internal correspondent p. 35
- 3.11 Sending a written message to an ISDN correspondent. p. 37
- 3.12 Send a voice message copy p. 37
- 3.13 Sending a recorded message to a number / a distribution list. p. 39
- 3.14 Broadcasting a message on the loudspeakers of a station group p. 40
- 3.15 Answering a call on your pager. p. 40
- 3.16 Allocating an outside line p. 41

Contents

4.

Keep in touch p. 42

- 4.1 Selecting calls to be diverted. p. 42
- 4.2 Diverting calls to another number (immediate diversion) p. 42
- 4.3 Diverting your calls to your voice message service p. 43
- 4.4 Activate/disable the personal assistant p. 43
- 4.5 Personal assistant : reaching you with one number only p. 44
- 4.6 Diverting calls to your pager. p. 45
- 4.7 Forwarding your calls from the receiving terminal ("Follow me") p. 46
- 4.8 Applying a selective diversion p. 46
- 4.9 Diverting all group calls. p. 47
- 4.10 Cancelling all diversions p. 47
- 4.11 Cancelling a specific diversion. p. 48
- 4.12 Diverting calls when your line is busy (divert if busy) . . p. 48
- 4.13 Do not disturb. p. 49
- 4.14 When you return, consult recorded messages p. 50
- 4.15 Leaving a recorded message for internal callers. p. 51
- 4.16 Consulting written messages. p. 52

5.

Managing your charges. p. 53

- 5.1 Charging your calls directly to business accounts p. 53
- 5.2 Finding out the cost of an outside call made for an internal user from your terminal p. 53
- 5.3 Charging the cost of an outside call to your company * p. 54

Contents

6.

Programming your telephone p. 55

- 6.1 Initializing your voice mailbox p. 55
- 6.2 Customising your voice greeting p. 55
- 6.3 Modifying your personal code p. 56
- 6.4 Selecting ringer tune and adjusting volume p. 56
- 6.5 Adjusting screen brightness p. 57
- 6.6 Selecting language p. 57
- 6.7 Programming direct call keys p. 58
- 6.8 Programming your personal directory p. 59
- 6.9 Programming an appointment reminder p. 60
- 6.10 Identify the terminal you are on p. 61
- 6.11 Broadcasting background music on your loudspeaker . . p. 61
- 6.12 Locking your terminal p. 61

Declaration of conformity p. 62

Getting to know your telephone

■ Navigator

Lets you browse through several pages of the display and select a line (the bottom line is implicitly active).



■ Guide key

This key lets you:

- obtain information about the telephone
- program the keys

Light indicating messages received.

Mute key so that your correspondent can no longer hear you.

Hang-up key
To terminate a call or programming.

■ Audio keys

Loudspeaker:
to share a conversation

to reduce loudspeaker or receiver volume

to increase loudspeaker or receiver volume

Hands free:
to make or answer a call without lifting the receiver



■ Alphabetic keypad

Protected by a flap, used for call by name, message service and programming.
You have a self-adhesive '**Memo**' label to stick inside the flap.

■ Display and display keys





Displays 2 lines and several pages giving information on your correspondent and the functions available through the keys associated with the lines of the display screen.

 StoreH	Call required number.	 Divert	Divert your calls to another number.
 Lock	Prohibit outside calls.	 Read+	Display more information if required.
 Appoint	Make an appointment.	 Custo	Customize your terminal.
 PickUp	Pick up a call to another number.	 Operat	Programme company data.




■ Programmable keys and icons

To make a call, activate a service or manage your calls. Icons are associated with each of these keys:






Call icons:

-  Incoming call (flashing).
-  Call in progress.
-  Call on hold.
-  Call on common hold.

Function icons:


-  Function active.
-  Function requiring action.
-  Terminal or line busy.

Preprogrammed function keys:

-  Divert your calls to another terminal.
-  Access the various mail services.
-  Access your personal directory.
-  Transfer call to another terminal.
-  Make an ISDN call.

Installing the programmable key label

A printed label is supplied with the terminal. This should be installed beneath the programmable keys.

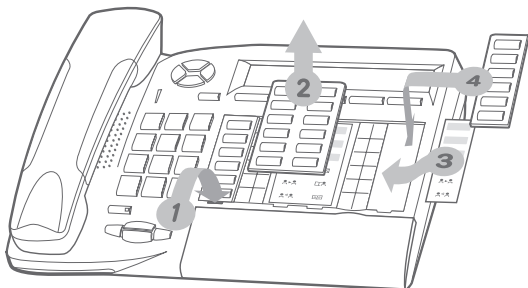

1. Insert a flat "blade" into the slot (1 slot per key block).
2. Raise the cover.
3. Slide the printed label into position.
4. Replace the cover.

1

Using your telephone

1.1

Making or answering a call without lifting the receiver (hands free)



OR



OR



line key

number required

OR



you are in hands free mode



your correspondent's
name

terminate
your call



During a conversation, you can lift the receiver without terminating the call.

during a conversation



1.2 Making an outside call

• Making a call:



OR



015566....

“Outside line”

key

number required



tells you the status of your
call

0 is the default code for an outside line.

1.3 Making an internal call



internal number
required



OR




default code for
“Operator call”
function

OR



line key



name and number of person
called

- If the internal or outside number does not reply:




broadcast a message on the loudspeaker of the free terminal

OR



request callback to a busy terminal

OR



send a written message

OR



go to next screen



store number to call again

1.4

Calling your correspondent by name (company directory)



Smith John

first letters of your correspondent's name

proposes a name followed by a corresponding telephone number and sequence number in list

- If name is OK:



make the call

• If name is not OK:




extend search
in list

OR




erase last letter entered

OR



show next name

OR



show previous name

OR



return to main menu

1.5

Calling from your personal directory



shows first ten names already entered in
directory*



calling the selected
correspondent

OR



access other
correspondents

* To enter your numbers see 'Programming your personal directory'.

1.6

Calling from the common directory

Your terminal has access to a common directory of outside numbers.



directory
number

1.7

Receiving a call



- To answer



OR



OR



1.8

Filtering calls using the voice mailbox

This service lets you filter incoming calls to your voice mailbox. When your caller leaves his message you can choose to communicate with him.

- Activating call screening:



programmed key
**'Voice mailbox
screening'**



enter your personal
code

- **When you receive a call:**

015566....

name or number of
the caller

you hear the message left by your
caller



hands free to take
the call

OR



OR



OR



to stop listening
only

same key to stop listening
and deactivate the screening

1.9

Redialling*

Redial

select the
'Redial'
function

Next

select the No. in the last ten issued

OR

Prev

Call

call required
number

1.10

Temporarily storing a number to call again

the number called does not reply

NbSave

record number dialled

number remains stored until another number is recorded

- **Redialling the stored number:**

StoreN

call




015566....

number stored

1.11

Requesting automatic callback if internal number is busy

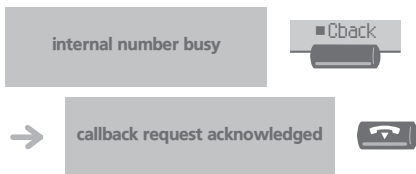


- Cancelling callback request:



1.12

Answering an internal call in intercom mode

You can answer without lifting the receiver. When you receive an internal call, your telephone rings and you are connected directly in hands free mode. The screen shows the caller's identity.



When your caller hangs up, intercom mode remains active.

1.13 Sending DTMF signals

During a conversation you sometimes have to send DTMF signals, such as with a voice server, an automated attendant or a remotely consulted answering machine.

During a conversation



to disable

to activate



The feature is activated by default.

1.14 Making an ISDN call



screen shows number dialled

number called



OR



OR



send call

erase last character

return to initial screen



access ISDN services



OR



add a subaddress *

keep your identity secret

OR

Text

send a written message

(*)Sending a subaddress

You may have to add a four-digit subaddress to the number called (to obtain a fax, PC or telephone, etc.).

SubAdr



OK

Send

enter subaddress on
keypad

1.15

Hiding your identity (ISDN call)

When you call an internal or an outside ISDN number, your number is automatically sent.

You can hide your identity before sending your call.



Secret

number called



hidden identity status is
shown

Choice

OK

Send



your identity remains hidden from
your correspondent



function is disabled at end of call

- You can hide your identity for all calls:



hidden identity remains active while key icon is lit up

“Secret”

programmed key

- To cancel hidden identity function:



“Secret” programmed
key

1.16

Identifying a malicious call (ISDN call)

When you receive a call, you can ask the network operator to record informations about your communication (correspondents' numbers, date and time of call, subaddress, etc.).

during a conversation

Mcid



service request acknowledged



Using this service requires to take out a subscription to the network operator.

1.17

Activating the loudspeaker during a conversation (receiver lifted)

during a conversation



activate loudspeaker



OR



adjust volume (7 levels)



deactivate loudspeaker

1.18

Mute, so that your correspondent cannot hear you

You can hear your correspondent but he/she cannot hear you:

during a conversation




disable microphone



corresponding LED lights up

resume the
conversation

2.1

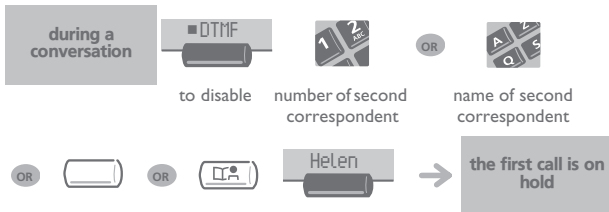Making a second call during a conversation

- **To cancel your second call and recover the first:**



If you make an error, hang up: your telephone will ring and you will recover your first call.

2.2

Answering a second call during a conversation

- A second correspondent is trying to call you:

during a conversation

Smith John

caller's name or number
flashing for 3 seconds



line key for which icon
is flashing



the first call is on hold

- To recover your first call:



line key corresponding to
icon


If you hang up without answering the second call, your telephone will ring.

2.3 Transferring a call

- To transfer your call to another number:



- If the number receiving the transfer answers:



You can also transfer your call immediately, without waiting for the number to answer, using either of the two methods described above.



Transfer between two outside calls is not generally possible (depends on country concerned and system configuration).

2.4

Switching between calls (Broker call)

During a conversation, a second call is on hold.

To accept the second call:



your first call is placed on hold

line key
corresponding to
icon

2.5

Three-way conference with internal and/or external correspondents (conference)

During a conversation, a second call is on hold.



three-way
conference



cancel conference and return
to first correspondent



hang up on all
correspondent



After the conference, to leave your two correspondents talking together:



2.6

Placing a call on hold (hold)

- **Exclusive hold:**

During a conversation, you wish to place the call on hold and recover it later, on the same telephone.



your call is placed on hold

line key

- **Recover the call on hold:**



line key corresponding to
icon

- **Common hold:**

To recover your call on any telephone in your system.



your call is placed on hold

- **Recover the call on hold from any telephone:**



line key corresponding
to icon

2.7 Placing an outside call on hold (parking)

You can place an outside call on hold and recover the call on another telephone:

during a
conversation

Park

OR

DTMF



to disable

“Parking”
function
code

• To recover the parked call:

PickUp

RetPrk



number of telephone
from which call was
parked

OR



**“Retrieve parked
call”** function code



number of telephone
from which call was
parked



If the parked call is not recovered within a preset time (default value 1 min 30), it is transferred to the operator.

2.8

Getting information about camped-on calls

- **Another call is received:**

during a conversation, you hear a beep



beep



the call is automatically placed on hold

Smith John

identity shown briefly

- **Check identity of callers on hold:**

Queue



last call received

Next



OR

Prev



check other calls

Answer



answer call displayed

2.9

Intrusion into an internal conversation

Your correspondent's line is busy. If the number is not "protected" and if authorised, you can intrude into the call:



same key to deactivate

- **Protection against intrusion:**



OR



"Protect a call"

programmed key or function
code

your extension
number

Protection is cancelled when you hang up.

3.1 Receiving supervised call ringing

To receive the special ringing for calls to another number:



“Supervised call ringing” programmed key

same key to cancel

3.2 Answering the general bell

When the operator is absent, outside calls to the operator are indicated by a general bell. To answer:



“Answer general bell” programmed key or function code

3.3

Manager/secretary filtering

System configuration allows “manager/secretary” groups to be formed, so that the manager’s calls can be directed to one or more secretaries.

- **From the manager’s or secretary’s telephone:**



incoming calls are filtered by a chosen person
(secretary, etc.)

“**Filter**” programmed
key



same key to cancel



Filtering is indicated on the manager’s telephone by the icon corresponding to the “filtering” programmed key.



Please contact your France Telecom installer for software configuration.

3.4

Call pick-up

You hear a telephone ringing in an office where no-one can answer. If authorised, you can answer the call on your own telephone.

- **If the telephone ringing is in your own pick-up group:**




OR



“**Group call pick-up**” programmed
key or function code

- If the telephone ringing is not in your pick-up group:

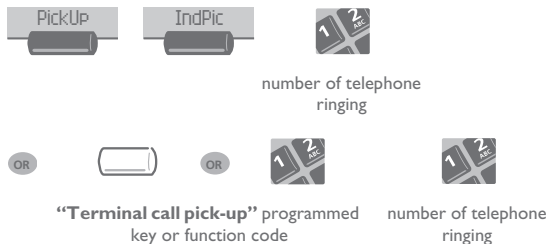

The system can be configured to prevent call pick-up on certain telephones.

3.5

Answering briefly in place of the operator

Outside calls to the operator will ring on your telephone and you can answer the call:



your telephone will ring at the same time as the switchboard



"Operator help"
programmed key

same key to
cancel

- Calls to the switchboard:

calls to the switchboard will ring on your telephone



"Operator help"
programmed key

3.6

Monitoring calls to other terminals

Calls to other numbers can be directed to any telephone (max. 8 numbers per programmed key):



your telephone will ring at the same time as the others



“Monitoring”
programmed key

same key to
cancel

3.7

Hunting groups

- Hunting group call:**

Certain numbers can form a hunting group and can be called by dialling the group number.

- Temporary exit from your hunting group:**



“Hunting group out” programmed key
or function code

your group number

- Return into your group:**



“Hunting group in” programmed key
or function code

your group number



Belonging to a group does not affect the management of direct calls. A specific telephone within a group can always be called by using its own number.

3.8

Calling an internal correspondent on his/her pager

The number called does not answer and you know that the person called has a pager:



number called



OR



“Paging” programmed key or function code



paging in progress is displayed



Your correspondent can answer from any telephone in the system.

3.9

Calling a correspondent on his/her loudspeaker

Your internal correspondent does not answer. If authorised, you can remotely activate your correspondent's phone:


■ Intru



you are connected to the loudspeaker on your correspondent's phone (if he/she has the hands free function)

3.10

Sending a written message to an internal correspondent

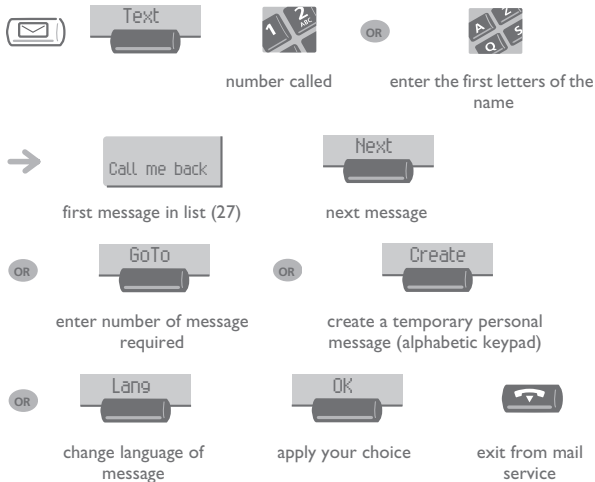


• The 27 standard messages are shown below:

- | | |
|----------------------------------|---|
| 1 Call me back | 15 Meeting on ____ (*) |
| 2 Call me back tomorrow | 16 Meeting on ____ at _:_ (*) |
| 3 Call me back at _:_ (*) | 17 Out for a while |
| 4 Call back _____ (*) | 18 Absent for the rest of the day |
| 5 Call the attendant | 19 Absent, back at _:_ (*) |
| 6 Call the secretary | 20 Absent, back on ____ at _:_ (*) |
| 7 I will call back at _:_ (*) | 21 On vacation, back on ____ (*) |
| 8 Use paging | 22 External meeting |
| 9 Please fetch your fax | 23 External meeting, back on ____ (*) |
| 10 Please fetch your mail | 24 I am in room nr ____ (*) |
| 11 Please cancel your forwarding | 25 In a meeting - do not disturb |
| 12 Visitors are waiting | 26 At lunch |
| 13 You are expected at reception | 27 Indisposed |
| 14 Meeting at _:_ (*) | (*) Messages to be completed using numeric keypad |

3.11

Sending a written message to an ISDN correspondent



number called


proceed as for an internal correspondent



You can do this during a conversation.

3.12

Send a voice message copy




personal code



display number of new and old messages




OR



select message to copy by consecutive presses



OR



number called

correspondent's name





send message

OR



record a comment *

* To record a comment :




start recording the comment

recording



end of recording



send message

OR



replay comment

OR



re-record a comment

3.13

Sending a recorded message to a number / a distribution list



Voice



Send

personal code



OR



OK

correspondent's
no. or list no.correspondent's name or
list nameReady to
record

Record

start message recording



Recording ...

recording

Stop

end of recording

OK

apply

OR

Listen

replay message

OR

Record

re-record a message

OK

3.14

Broadcasting a message on the loudspeakers of a station group

A message not requiring an answer can be broadcast on the loudspeakers within your broadcast group:



speak, you have 20 seconds



number of
broadcast group



The message will only be broadcast on terminals not in use and which have a loudspeaker.

3.15

Answering a call on your pager

A call on your pager can be answered from any telephone within the system.

your pager beeps



“Answer paging”
function code



your extension
number

3.16 Allocating an outside line

If authorised, you can transfer an outside line to another terminal, thus enabling that person to make an outside call.

during an internal conversation



“Allocate outside”
programmed key



your internal correspondent now has an
outside line and can dial




To know the cost of the call, press the “Allocate & charge” programmed key instead of the “Allocate outside” key, to allocate the line (see “Managing your charges”).

4

Keep in touch

4.1 Selecting calls to be diverted

When a diversion is applied, you can select the types of call to be diverted: outside, internal, all.

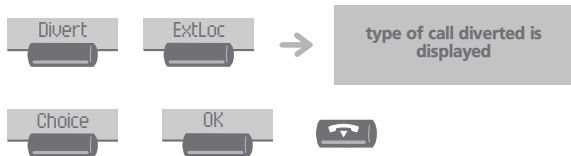

change type of call

4.2 Diverting calls to another number (immediate diversion)

The number can be your home, portable or car phone, voice message or an internal extension (operator, etc.).



number to be called



You can make calls, but only the destination number can call you.

4.3

Diverting your calls to your voice message service



Divert




type of diversion

4.4


Activate/disable the personal assistant



Custo





Assist

Perso
Assist:OFF

ON/OFF



Choice

Perso
Assist:ON

OK



apply

4.5

Personal assistant : reaching you with one number only



Custo

Assist

Menu

select type of diversion

IntNum

AND/OR

ExtNum

dial number of a colleague or your secretary dial an outside line number

AND/OR

Mobile

AND/OR

Operat

dial number of your Mobile 4076 or DECT

activate/ deactivate transfer to operator



Functionality is subject to software configuration: please contact your France Telecom installer if you experience any problems.

4.6

Diverting calls to your pager

Callers will thus be able to contact you while you are moving around the company:



“Divert to paging” programmed key
or function code

4.7

Forwarding your calls from the receiving terminal
("Follow me")

You wish to receive your calls in your present location:

Use the "Follow me" function.



your extension
number



OR



OR



OR



"Follow me" programmed key or
function code

your extension
number



OR



To cancel forwarding, see section 'Cancelling all diversions'.

4.8

Applying a selective diversion

You can selectively divert calls, according to the caller's identity:



OR




"Selective diversion" programmed
key or function code

- To cancel this diversion:



4.9 Diverting all group calls


You can divert all your group calls to another internal number:



4.10 Cancelling all diversions



“Cancel all diversions” programmed key or function code




4.11 Cancelling a specific diversion



programmed key corresponding to type of diversion
(group or selective)

4.12 Diverting calls when your line is busy (divert if busy)

Callers will thus be able to contact you while you are moving around the company:



number receiving
diversion



diversion is acknowledged



OR



OR



OR



OR




“Divert if busy”
programmed key or function
code

number receiving
diversion

4.13 Do not disturb

You can make your terminal temporarily unavailable for all calls.

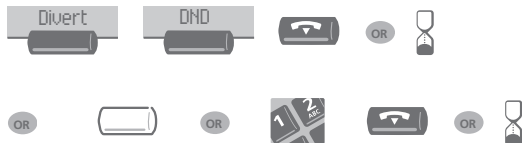

“Do not disturb” programmed key or
function code

4.14 When you return, consult recorded messages

The light indicates that messages have been received.



personal code




display number of new and old messages



display name of sender, with date, time and ranking of message



OR



OR




select message

listen to message



OR



erase message

call back sender of message



OR

copy message

4.15 Leaving a recorded message for internal callers

You can leave a message on your terminal which will be displayed on the screen of the terminal calling you.



OR

Divert



Text



“Text”

programmed key



Call me back

follow instructions to select message

first of the 27 messages




*Message is selected in the same way as in:
Sending a written message to an internal correspondent.*

4.16

Consulting written messages

The light indicates that messages have been received.

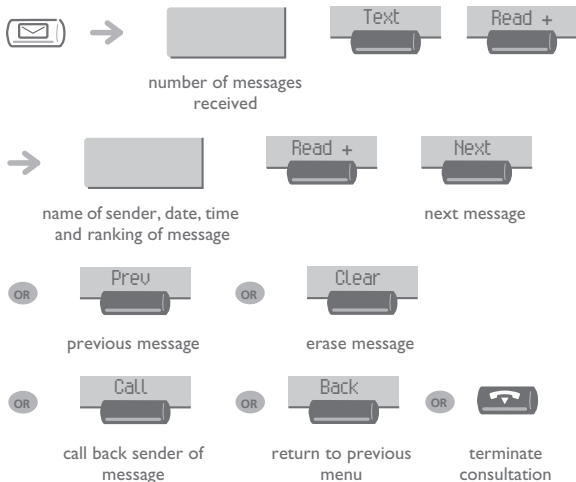

5.1 Charging your calls directly to business accounts

You can charge the cost of your outside calls to business account numbers.



OR



"Business account code"
programmed key or function
code

number of business
account

- **Adding or changing a business code during a call:**



"Business account code during call" programmed key

5.2 Finding out the cost of an outside call made for an internal user from your terminal

in conversation with the
internal user



OR



programmed key
'Meter Total Recall'

code for function
'Meter Total Recall'



the call is placed on hold



outside number
called



transfer call to your
correspondent on hold

• **At the end of the call, you are called back and you can:**

1. Read information concerning call (cost, duration, number of units...).



2. Print a charge ticket.



3. Terminate consultation.



5.3

Charging the cost of an outside call to your company *

If authorised, when travelling or from home, you can call a public network subscriber and charge the cost of the call to your company.



your company's
number



extension number and
check code



public network
number

*For more details, please contact your France Télécom installer.

6.1

Initializing your voice mailbox

light flashes



enter your personal code then record
your name according to voice guide
instructions



*Your personal code is used to access your voice mailbox
and to lock your telephone.*

6.2

Customising your voice greeting

You can replace the greeting message by a personal message.



Custo

MLBox

Custom

Ready to
record

Record



Recording ...

to start recording

recording

Stop

OK

OR

Default

Yes


end of recording

apply

to return to the default message

6.3 Modifying your personal code

Your personal code is used to access your voice mailbox and to lock your telephone.





old code
(4 digits)

new code
(4 digits)



As long as your voice mailbox has not been initialized, personal code is 1515.

6.4 Selecting ringer tune and adjusting volume



OR



consecutive presses
to obtain tune (8)

consecutive presses to
adjust volume (7)

6.5

Adjusting screen brightness



Custo

Set

Cntrst

Screen

OR

Icon

select the required level by
consecutive presses

OK



Levels of brightness are scaled from 4 to 16.

6.6

Selecting language



Custo

Option

Lang

French

Choice

OK



current language

consecutive presses

to apply



You can choose between 2 predetermined languages.

6.7

Programming direct call keys



press
programmed key


present value of selected
key



enter the number

6.8

Programming your personal directory



press a display key

enter the name of
your correspondent




correspondent's
number to be
programmed

apply

- The following screen keys can also be used:



erase last character
entered



erase number



enter pause in number




send rest of number in
DTMF

6.9

Programming an appointment reminder

You can define the time of a temporary reminder (one in 24 hours) or a permanent reminder (every day at the same time).

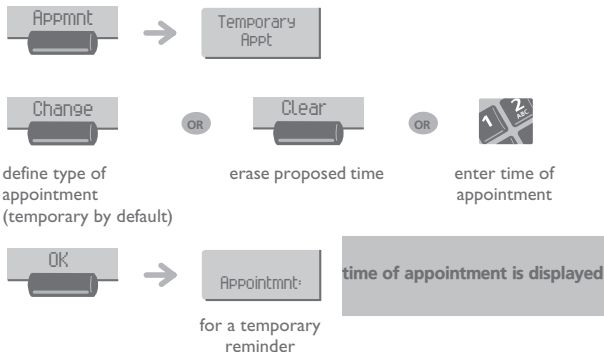

- **At the programmed time, your telephone rings:**



If you are in conversation, the display flashes and an audio tone is generated. After three calls without reply, a temporary request is cancelled but a permanent request remains in memory.

If your calls are diverted to another terminal, the diversion is not applied to the reminder call.

- To cancel your reminder request:



6.10 Identify the terminal you are on



Press this key twice.

6.11 Broadcasting background music on your loudspeaker

You can broadcast background music on the loudspeaker of your telephone (depending on configuration):



when telephone is not in use,
background music is played



same key to cancel



The music stops when a call is made or received and starts again when you hang up.

6.12 Locking your terminal

This service enables you to prevent any outside calls from being made and prevent any changes to the programming of your terminal:



personal code (4
digits, 1515 by default)

Declaration of conformity

We,
France Telecom,
6, Place d'Alleray
75505 Paris Cedex 15

hereby declare that we assume the products covered in these instructions to be compliant with the essential requirements of Directive 1999/5/CE of the European Parliament and Council.

Any unauthorised modification to the products shall render this declaration of compliance null and void.

Standby power consumption = 0,35 W

The CE marking indicates that this product complies with the following EC directives



- 89/336/CEE (electromagnetic compatibility)
- 73/23/CEE (low voltage)
- 1999/5/CE (R&TTE)

3EH 21033 ZUAB Ed.02

To contact your after sales department, please dial

▶ N° Indigo 0 825 817 807

0,15 € TTC/MN

**monday to saturday from 8 a.m to 8 p.m
(except bank holidays)**



France Télécom
6, place d'Alleray - 75505 Paris Cedex 15
S.A. au capital de 9 869 333 704 € - 380 129 866 - RCS Paris

Notre site internet : <http://www.francetelecom.com>