



Emergency opening, using the battery override box.

1. Use the battery override box to open the safe if the batteries die.
Refer to Step 1. (page 2)
2. Replace the batteries inside the safe immediately and continue using as normal.

NOTE: Do not use the override box on a regular bases to power the safe.
Use only if the internal batteries die.

Emergency opening, using the override key.

1. Gently remove the PROTEX label from the keypad, to locate the keyhole.
2. Insert the key into the keyhole and turn to the left until stops.
Hold the key there! (do not let go) and turn knob to open the door.

NOTE: Use this method if you lost or forgot your code, or if the keypad was damaged or malfunctioned.

Tips.

- Do not use the # key or the * key as a part of your code
- Use the * key as backspace to clear the last digit
- The safe will keep your personal code in memory for up to 6 months without power.

USER MANUAL



Models: HD-34 & HD-34C

Step 1. – Opening the safe.

Locate the **RED** accessories box embedded in the packing foam and remove the 4 AA batteries along with the power override box.

1. Install the 4 AA batteries in the black Power Override Box.
2. Plug the Power Override Jack into the Power Override outlet on the keypad.
3. Enter the factory default code: 1-2-3 followed by #.
4. Turn knob clockwise to open the door.

NOTE: Now you can remove the batteries from the override box and install them in the battery box that is located in the back of the door.

Step 2. – Enrolling/changing your personal code.


1. Open the safe with your personal code or factory code 1-2-3-# (if it was never changed before).
2. Write your new 1-10 digit code on a piece of paper or memorize it in your head
3. Press the Setup Button once (located on the inside edge of the door near the hinges). The LED indicator will turn yellow.
4. Enter your new code and press # to end. The LED indicator will turn off.

Your new personal code is now programmed.

5. Now enter your new code followed by # and turn knob to open the safe.

NOTE: Leave the door open and test your new code several times before closing the door.

Keypad

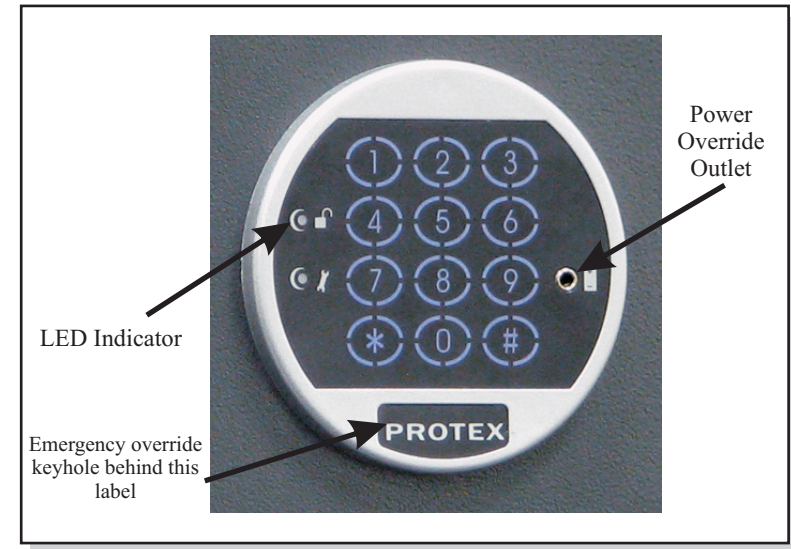

Power Override Box

