

User's Manual

GB NL F D DK E PL



DECLARATION OF CONFORMITY

Hereby,

Company:	TE-GROUP nv
Address:	Kapelsestraat 61, 2950 Kapellen - BELGIUM

declare, that the following equipment:

Product Name:	Quintezz Warmwhite Flexkit 150-300 LED set (2,5-5mt)
Product Type:	Flexible LED strip

The above mentioned product complies with the essential requirements, which are specified in the directive 2004/108/EC and 2006/95/EC on the approximation of the laws on the Member States relating to electromagnetic compatibility.

This product has been tested against following standards and specifications, applying versions valid on September 2012:

EN55015
EN61547
EN61000
EN61347

Joseph Van Oosterum, CEO TE-Group NV, September 2012

----- Manual/Warm White Flexkit_300LED-5M-24V/08-13/V01 -----

ILLUSTRATION 1

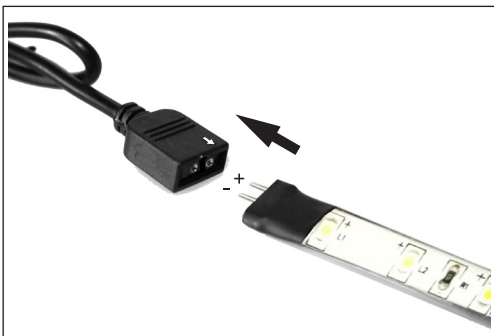


ILLUSTRATION 2



ILLUSTRATION 3


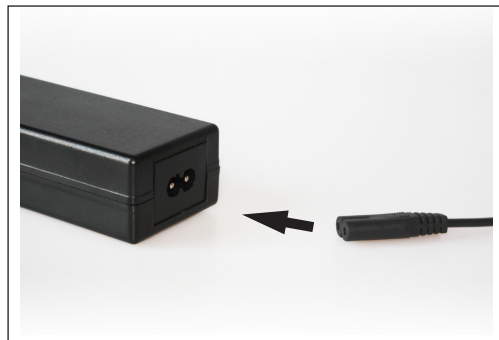


ILLUSTRATION 4

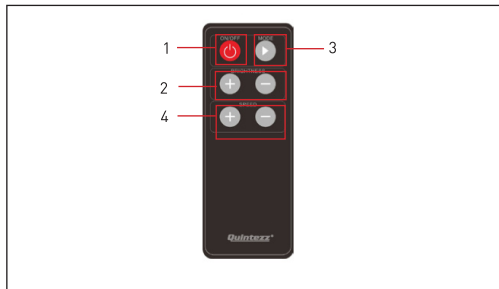

PACKAGE CONTENTS

The WARM WHITE LED Flexkit consists of:
* Flexible LED strip with 3M industrial tape on the backside
* LED controller
* Infrared remote control
* 230V DC adapter

GB

INSTALLATION

- Place the strip on a clean, even and dry surface. **Do not fold the strip!** Remove the coating paper of the tape on the backside of the strip and stick the strip in the desired location.
Note: If needed, the strip can be shortened every 3 LED's / 5 cm, starting at the end of the strip.
- See illustration 1
Connect the LED controller wire with the strip.
Attention: The 24V connection of the strip [see 24V+ indication on the strip] and the arrow on the plug of the controller should be pointing towards each other!
Note: The controller can be fixed using tape or screws [not included!].
- See illustration 2
Connect the other side of the LED controller with the adapter connection.
- See illustration 3
Connect the adapter with the power supply cable.

DESCRIPTION OF THE REMOTE CONTROL

When using the remote control for the very first time, you need to remove the transparent foil from the battery compartment. The remote control runs on a CR2025 battery.

See illustration 4

- ON/OFF: Turn the strip ON/OFF
- BRIGHTNESS-keys: Brighten or darken the chosen light effect
- MODE-key: - CONTINUOUSLY ON: LED strip is ON continuously
- SMOOTH: LED strip turns ON and OFF gradually
- FLASH: LED strip flashes ON and OFF.
- FADE: LED strip turns ON, gradually decreases and turns OFF
- SPEED-keys: adjust speed chosen light effect

SAFETY INSTRUCTIONS

- Installation should be performed only by a competent person or professional electrician.
- Never open the LED controller.
- Never touch the plug contacts with sharp or metal objects.
- Make sure that cables cannot cause a trip hazard.
- Use only the original power supply and original accessories.
- Do not expose the unit to direct sunlight.
- Never place the device in the vicinity of heat sources.
- Never place the unit on surfaces that are heat sensitive.

- Protect the device from moisture, dust, liquids and vapours.
- Unplug the unit at the main power socket before cleaning. Do not use any solvent- based cleaning agents, only a soft, dry anti-static cloth.
- Do not attempt repairs yourself.
- If the unit is not properly installed or operated QUINTEZZ® cannot accept liability.

TECHNICAL DATA

- Operating voltage: 230V AC
- Power supply: Europlug
- Power consumption: max 48 watts
- Ambient operating temperature: -10 ~ 40°C
- Humidity: 10% - 85% [none condensing]
- Storage temperature: -20 ~ 60°C
- Storage humidity: 5% - 90% [none condensing]
- Protection class:
Strip: IP68 Controller: only for indoor use Adapter: only for indoor use
- Dimensions [L*W*H]:
Strip: 5000x8,5x3 mm Controller: 50x35x22 mm Adapter: 117x50x33 mm

Strip:

LED Flex Strip IP68
DC 24V
300 EPISTAR LEDs, 3528 SMD
Max. 1500 lumen
120°, viewing angle
Length: 5000x8,5x3mm, cuttable every 3 LED's / 5 cm

Controller:

DC 24V, 2A
4 different color-light programs + DIM & SPEED function

Adapter:

Input: 100-240V * Output: 24V / 2A

NOTE: For extra connectors, extensions cables, spare parts and more, please visit www.quintezz.com.

GUARANTEE

Quintezz® is a registered trademark of TE-Group NV. The Quintezz® brand stands for superior product quality and outstanding customer service. That is why Quintezz® warrants this product against all defects in material and workmanship for a period of **two (2) years** from the date of original purchase of the product. The conditions of this guarantee and the extent of responsibility of Quintezz under this guarantee can be downloaded from our website: www.quintezz.com.