

ProHD

AA-S3602I Charger/Adaptor

USER MANUAL

Characteristics

- ◆ 2-channel simultaneous charging;
- ◆ 4-level LED charging indicators;
- ◆ 2-channel simultaneous adapting output

Caution


1. Only work in the temperature between 0°C-40°C.
2. Keep the terminals clean and ensure the reliable connection.
3. Do not cover the cooling vent.
4. Never try to open the product.
5. Do not touch water or use it in wet environment.
6. Do not use metal or other conductors to touch the inside of the charger.
7. Only use the provided AC/DC power adaptor to power the charge.

Compatible Batteries

AA-S3602I: JVC SSL-JVC50, BN-S8I50


Charging

1. Connect the AC/DC power adaptor into DC in; the charger is automatically switched on.
2. Mount the compatible batteries onto the charging slot, and the LED charging indicator will start to flash and indicates the current capacity of each battery. (25%, 50%, 75% and 100%)
3. When the battery is fully charged, all the 4 LEDs will light on and stop flashing.

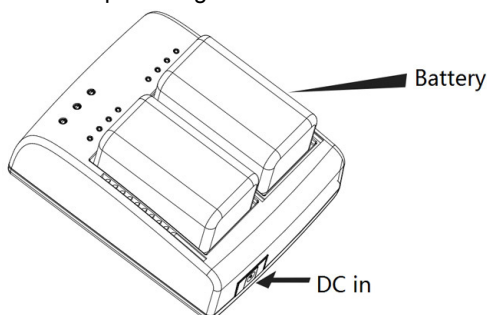

Adapting output

1. There are two 5.5mm pole DC output sockets: Primary output and Secondary output.
2. Connect the battery-shape adaptor's power lead into DC socket, and the Adaptor indicator will lights on.
3. The two channels output simultaneously and offer total 4A current.
4. If only use one channel DC output, please connect to Primary output socket.

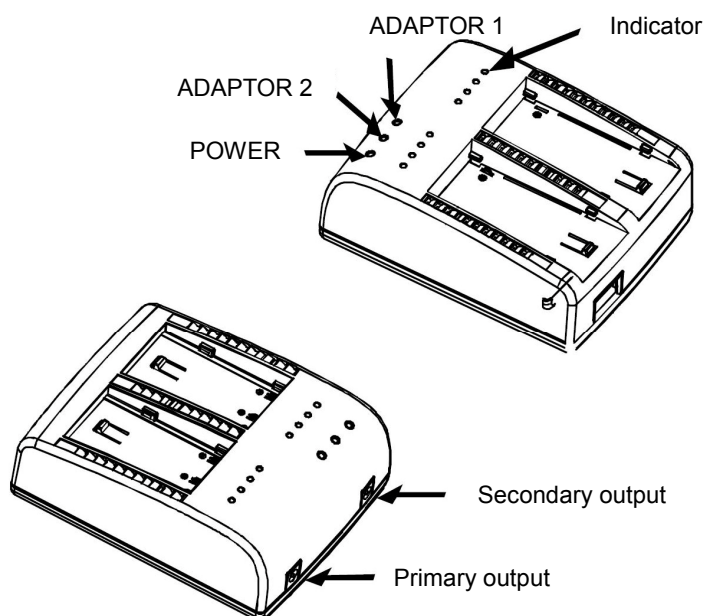

Specifications

Power input	DC 11-17V
Charging output	DC 8.4V, 2A×2
Adapting output	DC 8.4V, 4A in total
Power consumption	Max 48W
Dimension	136×110×47mm
Mass	230g

ProHD

This model is manufactured, warranted and supported by **SWIT Electronics Co., Ltd. / SWIT Electronics USA, LLC**, and distributed in North America by **JVC Professional Video Products**.

To obtain service or for further information, please contact:

SWIT Electronics USA, LLC.

Address: 4300 Stevens Creek Blvd., Suite 230, San Jose, CA 95129

Toll free: 1 866 986-SWIT (7948) • Tel: 408 260-8258 • Fax: 408 228-8438

Email: info@swit.us • Website: www.swit.us