

THE **TORNADO**

TORNADO

EXTERIOR CONSTRUCTION

- 430 stainless steel front, top, sides and back
- 4" (102 mm) adjustable legs
- Cool to the touch pull down door with microwave seal

INTERIOR CONSTRUCTION

- 304 stainless steel interior
- Fully insulated cook chamber
- Removable / variable cooking surfaces
- Rotating lower cooking element for cleaning


STANDARD FEATURES

- Integral Recirculating Catalytic Converter for UL listed ventless operation (UL KNLZ)
- Variable speed High h recirculating impingement airflow system
- Variable cooking surfaces (racks, stones and platters)
- Independently controlled bottom browning element
- Smart Voltage Sensor Technology*
- Smart Menu System capable of storing up to 128 recipes
- Stackable design (requires stacking kit)
- Manual snooze mode
- Includes plug and cord (5ft.)
- Warranty – 1 year parts and labour



PERFORMANCE

- The Tornado evenly and consistently toasts, browns, and crisps food up to twelve times faster than traditional methods, resulting in a high level of throughput without compromising quality

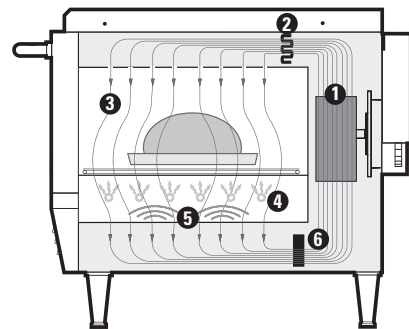

1. Blower Motor
2. Impingement Heater
3. Impinged Air
4. IR Element
5. Microwave Bursts
6. Catalytic Converter



*Smart Voltage Sensor Technology does not compensate for lack of or over voltage situations.
It is the responsibility of the owner to supply voltage to the unit according to the above specifications.
** This product conforms to the ventilation recommendations set forth by NFPA96 using EPA202 test method.




TurboChef reserves the right to make substitutions of components or change specifications without prior notice.



Accelerating the World of Cooking™



Accelerating the World of Cooking™

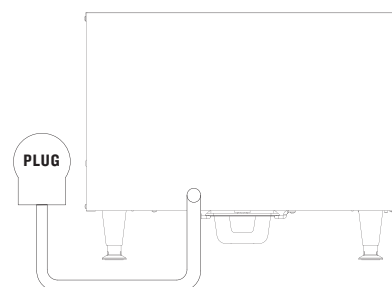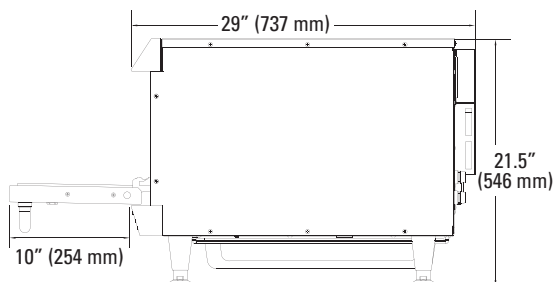

DIMENSIONS		
Single Units		
Height	19"	(483 mm)
on legs	23"	(584 mm)
Width	26"	(660 mm)
Depth	25.7"	(653 mm)
with handle	28.2"	(716 mm)
Weight	190 lbs.	(86 kg)
Stacked Units (Stacking Kit Required)		
Height	38"	(965 mm)
Width	26"	(660 mm)
Depth	25.7"	(653 mm)
with handle	28.2"	(716 mm)
Weight	380 lbs.	(172 kg)
Cook Chamber		
Height	8"	(203 mm)
Width	15.5"	(393 mm)
Depth	14.7"	(373 mm)
Volume	1.2 cu.ft.	(34 liters)
Wall Clearance		
Top/Sides	2"	(51 mm)
Back	0"	(0 mm)

ELECTRICAL SPECIFICATIONS		
EUROPE/ASIA-PACIFIC		
NGCEW (NGC-1180-1W)		
Operating Voltage	400 VAC	
Current	16 amp	
Phase	3 Phase	
Frequency	50 Hz	
Plug	IEC 309, 5-pin, 32 amp	
Max Input	10500 watts	
Microwave Input Power	3500 watts	

NGCED (NGC-1180-1D)		
Operating Voltage	230 VAC	
Current	30 amp	
Phase	3 Phase	
Frequency	50 Hz	
Plug	IEC 309, 4-pin, 32 amp	
Max Input	10500 watts	
Microwave Input Power	3500 watts	
NGCUK (NGC-1180-1K)		
Operating Voltage	230 VAC	
Current	30 amp	
Phase	3 Phase	
Frequency	50 Hz	
Plug	IEC 309, 3-pin, 32 amp	
Max Input	6700 watts	
Microwave Input Power	3500 watts	
NGCJD - 50Hz/ 3 Phase (NGC-1180-1K-1D-1) NGCJD - 60Hz/ 3 Phase (NGC-1180-1D-2) NGCJK - 50Hz/ 1 Phase (NGC-1180-1K-2005-3) NGCJK - 50Hz/ 1 Phase (NGC-1180-1K-2005-4)		
Operating Voltage	200 VAC	
Current	30 amp	
Phase	1 or 3 Phase	
Frequency	50 or 60 Hz	
Plug	PSE-marked, 4-blade, 30 amp	
Max Input	10500 watts	
Microwave Input Power	3500 watts	

*All AU-New Zealand ovens with clips allow for 5 pin plug.



Australia

www.moffat.com.au

New Zealand

www.moffat.co.nz

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
Email vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
Email nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
Email vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
Email qldsals@moffat.com.au

Western Australia
Telephone 08-9202 6820
Email bgarcia@moffat.com.au

New Zealand
Moffat Limited
Christchurch
Telephone 03-389 1007
Email sales@moffat.co.nz
www.moffat.co.nz

Auckland
Telephone 09-574 3150
Email sales@moffat.co.nz

