



# Quick start guide


SE888

**PHILIPS**

# What's in the box



Handset\*

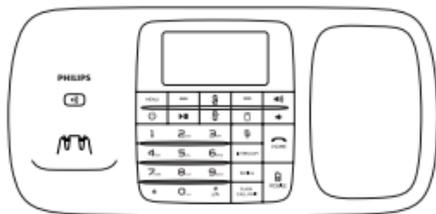


Base station



Charger\*



Power adapter\*



Line cord\*\*



CD rom



Quick start guide  
Guarantee

## Note


- \* In multi-handset packs, there are additional handsets, chargers and power adapters.
- \*\* In some countries, you have to connect the line adapter to the line cord, then plug the line cord to the telephone socket.

## Caution

- Use only the supplied batteries and power adapter.

# 1 Get started


## Connect the base station and charger

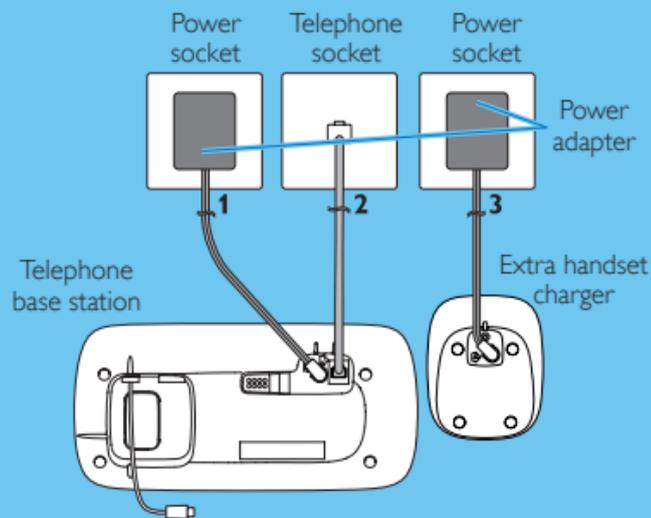

- 1 Connect each end of the power adapter to:
  - the DC input jack at the bottom of the base station;
  - the power socket on the wall.
- 2 Connect each end of the line cord to:
  - the telephone socket at the bottom of the base station;
  - the telephone socket on the wall.
- 3 For multi-handset version, connect each end of the power adapter to:
  - the DC input jack at the bottom of the extra handset charger;
  - the power socket on the wall.


**Note** Charge the batteries for 8 hours before first use.

## Configure your phone

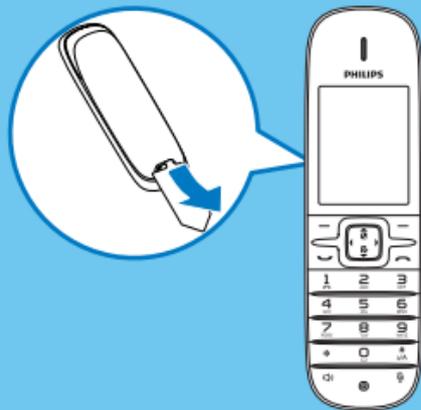

- 1 The batteries are pre-installed in the handset. Pull the battery tape off from the battery door before charging.
- 2 When using your phone for the first time, you see a welcome message (country dependent).
- 3 Select your country, then press **[OK]** to confirm.
- 4 Set the date and time.
  - If the time is in 12-hour format, press \* key to select **[AM]** or **[PM]**.

## Charge your phone

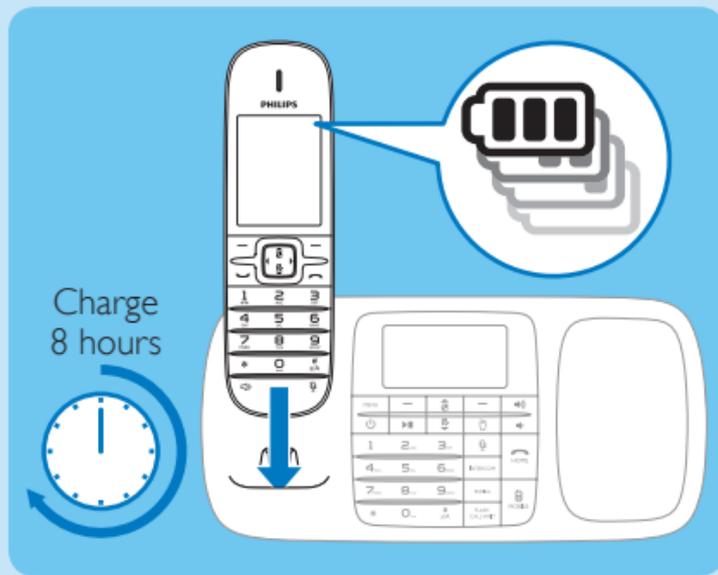

Place the handset on the base station to charge the handset. When the handset is placed correctly on the base station, you hear a docking sound.

↳ The handset starts charging.

**Note** Charge the batteries for 8 hours before first use.

### Check the battery level



When the handset is off the base station/charger, the bars indicate the battery level (full, medium and low).




When the handset is on the base station/charger, the bars flash until charging completes.



The empty battery icon flashes and you hear an alert tone. The battery is low and needs recharging.

## Charge your mobile phone

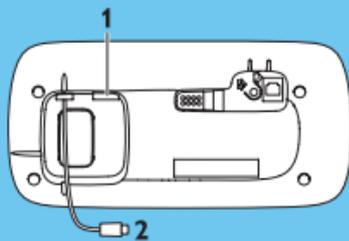

Telephone  
base station

- 1** For iPhone users, connect the plug of your USB charging cable (not supplied) to the USB socket at the bottom of SE888.
- 2** For mobile phones with micro USB charging, connect the micro USB cable plug to the micro USB socket of the mobile phone.

## 2 Bluetooth

### Pair SE888 with your mobile phones

Make sure the Bluetooth function of the mobile phones is activated and in searching status. Then you can do the pairing in this way:

- 1 On the base station, press **MENU**.
- 2 Select **[Bluetooth]** > **[Find Me]**.
- 3 Place the mobile phone close to the base station, then press **[OK]** to confirm.
- 4 On the mobile phone, select **SE888** and connect.
- 5 Enter the PIN code (0000) on the mobile phone if necessary.
  - ↳ When SE888 and the mobile phone are paired, **⌘<sub>1</sub>2** or **⌘<sub>1</sub>2** is displayed on the screen of the handset and base station.

#### Note

- When the Bluetooth device list is full, remove some mobile phone names before pairing can start.
- If the name of SE888 exists in your mobile phone, you have to remove it from your mobile phone. Then you can do the pairing again.

#### Tip

For PC pairing and PC phonebook download, install the PC software '**ThinkLink**' saved in the cd rom or at <http://www.philips.com/support>

# 3 Enjoy

## Call

### Quick call from land line

Press  /  on the handset or  on the base station and dial the phone number.

### Dial before you call

- 1 Dial the phone number on the handset or base station.
- 2 Press  to select the land line or Bluetooth line (/<sub>1</sub> /<sub>2</sub>) from which you want to make an outgoing call.
- 3 Then, you can either:
  - press  /  on the handset; or
  - press  or  on the base station and select a line or mobile phone to dial out the call.

**Note** Make sure that the Line settings are set to **[Home]** for land line or **[Mobile 1]/[Mobile 2]** for Bluetooth line. For information, see Line settings in the Phone settings chapter in the user manual.

**Tip** If you select **[Auto]** on the handset, the idle line is pre-selected for an outgoing call, with **[Home]** as the highest priority. Then **[Mobile 1]** and **[Mobile 2]**. If you select **[Manual]**, select an icon among these three options.

## Answer a call

- When there is an incoming call from the land line, press  /  on the handset or  on the base station.
- When there is an incoming call from the Bluetooth line, press  /  on the handset or  on the base station.
- When there are incoming calls from the land line and Bluetooth line at the same time, press  on the handset/base station to select a call, then,
  - on the handset, press  /  ; or
  - on the base station, press  or  to pick up one of the calls.

## End a call

- Press  on the handset or  on the base station.
- Place the handset to the base station.

## Adjust the volume during a call

Press  on the handset or  /  on the base station to change the volume during a call.


## Add a contact in the phonebook

- 1 Press  on the handset or base station.
- 2 Select **[Option]** > **[Add new]**, then press **[OK]** to confirm.
- 3 Enter the name then press **[OK]** to confirm.
- 4 Enter the number, then press **[Save]** to confirm.

## Record an announcement

- 1 Press **[Menu]**
- 2 Select  > **[Announcement]**, then press **[OK]** to confirm.
- 3 Select **[Answer & rec.]** or **[Answer only]**, then press **[OK]** to confirm.
- 4 Select **[Record new]**, then press **[OK]** to confirm.
- 5 Start recording close to the microphone after the beep.
- 6 Press **[OK]** to stop recording.
  - ↳ You can listen to the newly recorded announcement on the handset.

## Listen to messages recorded on the answering machine

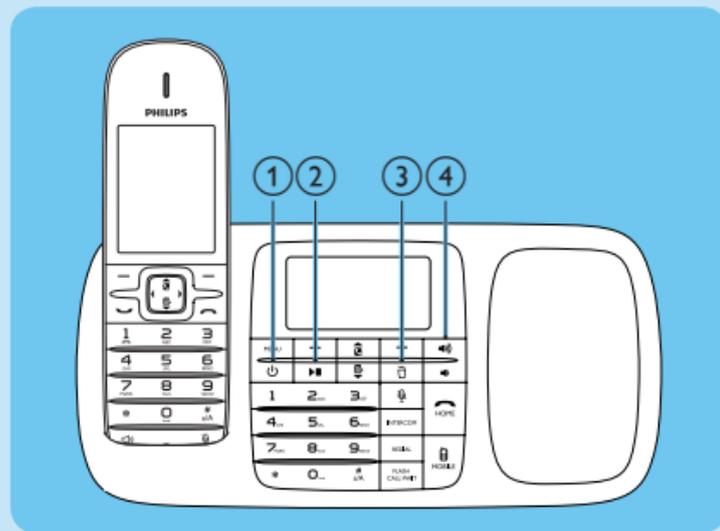

- ① Switch on/off the answering machine: Press .
- ② Start/Stop listening to the recorded messages: Press .
- ③ Adjust the volume: Press .
- ④ Delete the current message: Press .

**Note** For more information, see the Telephone answering machine section in the user manual.

# Welcome to Philips

Register your product at [www.philips.com/welcome](http://www.philips.com/welcome)

## Need help?

### User manual

Refer to the user manual that came with your new phone.

### Online help

[www.philips.com/support](http://www.philips.com/support)



Reproduction in whole or in part is prohibited without the written consent of the copyright owner. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners. © 2011 Koninklijke Philips Electronics N.V. All rights reserved.



**CE 0168**

QSG\_SE888\_EN\_V1.3  
WK11285