

iTaste vv 4 说明书 尺寸: 56*96mm 封面材质: 157g 双铜板纸单面过哑胶



内页材质: 128g 双铜纸双面印刷 装订方式: 胶装

USER MANUAL

itaste vv4

CE FCC



Welcome to the iTaste VV4

Congratulations on the purchase of this iTaste VV4 & Welcome to the next level of compact advanced personal vaporizers.

The iTaste VV4 is the newest in the line of bestselling Innokin Technology iTaste VV4 vaporizers and features a wider range of Variable Voltage, Variable Wattage, advanced safety features and also 'Vape while charging' Technology.

Please check and verify that your iTaste VV4 is an authentic Innokin Technology product. To verify that this iTaste VV4 is a real Innokin Technology device please:

- 1) Find the label on the reverse of the packaging and scratch the silver stripe to reveal your iTaste VV4 Unique Authorization number.
- 2) Visit the Official Innokin Technology website at <http://www.innokin.com>
- 3) Enter the Unique Authentication number in the Authentication field.
- 4) Verify your iTaste VV4 is authentic.

If you have any questions or suggestions we would like to invite you to please write to us at support@innokin.com. We are looking forward to hearing from you. Join our Innokin FaceBook Page: www.facebook.com/Innokin.Technology for the latest information, contests, giveaways and a great community!

WARNING:

Please read this section carefully to ensure you receive maximum benefits from your iTaste VV4 and enjoy vaping with it in the most safe and effective ways possible.

1. This iTaste VV4 Advanced Personal Vaporizer may be used with e-liquids that contain nicotine. **Please check with your e-liquid provider.** This product is only intended for use by adults of legal smoking age (18+) and should not be used by children, women who are pregnant or breastfeeding, or persons with or at risk of heart disease, high blood pressure, diabetes or taking medicine for depression or asthma, or who otherwise may be sensitive to nicotine. Nicotine is addictive and habit forming, and it is very toxic by inhalation, in contact with the skin or eyes, or if swallowed. Ingestion of the non-vaporized concentrated e-liquid ingredients can be poisonous. Keep away from children and pets.
2. This iTaste VV4 Advanced Personal Vaporizer may be used with e-liquids that contain nicotine, a chemical known to the State of California to cause birth defects or other reproductive harm. **Please check with your e-liquid provider.**


(For products sold in California.)

The clearomizer **must** be stored out of the reach of children and pets. All empty clearomizers must also be disposed of properly and out the reach of children and pets.

3. This iTaste VV4 Advanced Personal Vaporizer includes small parts such as the mouth piece. Always keep any small parts out of reach of children and pets to prevent swallowing or other harm.
4. Do not misuse, mishandle or store your iTaste VV4 Advanced Personal Vaporizer improperly. Even though it is made of high quality stainless steel it may become damaged when dropped or otherwise mishandled.
5. Do not attempt to repair the unit by yourself as damage or personal injury may occur.
6. In order to guarantee the normal functioning of your iTaste VV4 Advanced Personal Vaporizer, and maximize the pleasure of vaping, we strongly advise that you charge the battery when the power level drops below 10 percent.
7. In order to prolong the operation of your iTaste VV4 Advanced Personal Vaporizer, please do not place or store this iTaste VV4 Advanced Personal Vaporizer in excessively hot or cold environments.

8. Obey local laws or regulations regarding Electronic Cigarettes when vaping. If you are in an area where there are any bans or potential dangers, please do not use your iTaste VV4 Advanced Personal Vaporizer.
9. Your iTaste VV4 Advanced Personal Vaporizer is not waterproof. Keep it dry at all times.
10. Keep your iTaste VV4 Advanced Personal Vaporizer away from sources of excessive heat as damage may occur.
11. Do not drop, throw, or mishandle your iTaste VV4 Advanced Personal Vaporizer as the outer shell or inner components may become damaged.
12. Innokin Technology is not responsible for battery and charger explosions, or malfunctions, due to the use of a low-quality charger. Only use the original iTaste VV4 Advanced Personal Vaporizer starter kit charger to charge your iTaste VV4, We recommend you always use a high quality 5V 500mA USB wall charger (CE/UL Certified). iTaste VV4 Not designed for use with a car charger, The iTaste VV40 Does not come included with a car charger.

13. Innokin Technology is not responsible for any clearomizer or battery damage due to the use of low quality eLiquid or dry herb. The original iTaste VV4 Advanced Personal Vaporizer starter kit does not come included with clearomizer or atomizer.

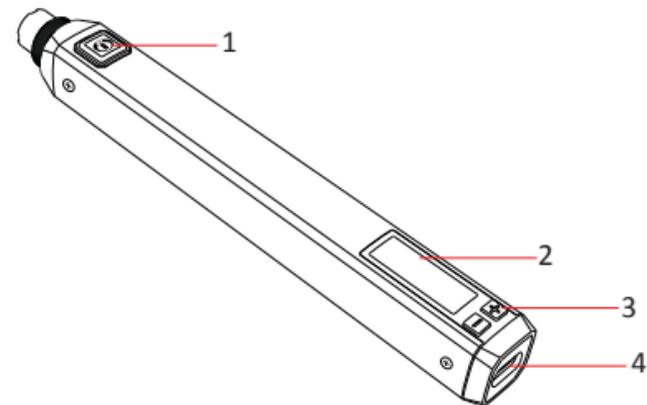

- 1 Firing, POWER ON, POWER OFF button
- 2 OLED Display Screen
- 3 "+" button: VV4 /VW+
"-" button: VV4 /VW-
- 4 Micro USB cable plug port


The Primary Features of The iTaste VV4

Battery Level Indicator:

The iTaste VV4 battery capacity is displayed via green, yellow and red LED lights.
Green = Almost fully Charged. When the iTaste VV4 is fully recharged the LED light will power off.

Yellow = Half Power.

Red = Low Power. Charge the iTaste VV4.

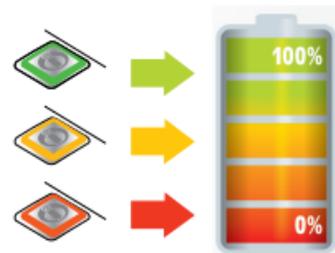

Variable Voltage:

Voltage can be adjusted from 3.0 – 6.0 volts in .1 volt increments.

Variable Wattage:

Wattage can be adjusted from 6.0 – 15.0 Watts in .5 watts increments.

Large battery capacity:

The iTaste VV4-M has a built-in 1000 mAh polymer Li-Ion rechargeable battery.


ON/OFF battery switch:

Press the power button “ⓘ” three times in rapid succession to turn on the iTaste VV4. Once the iTaste VV4 is On hold down the power button “ⓘ” to activate the atomizer and vape. When the iTaste VV4 is not in use, press the power button “ⓘ” three times in succession to power off the iTaste VV4 Advanced Personal Vaporizer. Always power off the iTaste VV4 Advanced Personal Vaporizer when it is not being used, or when it is going to be stored in a pocket, bag or purse.

SAFETY:

10 second cutoff:

If the activation button is held for 10 seconds or longer the iTaste VV4 Advanced Personal Vaporizer will stop firing until the button is released and pressed again.



Low Voltage Warning

The Red LED and Battery bar will continue blinking when the battery capacity is lower than 3.3V and the iTaste VV4 Advanced Personal Vaporizer will power off automatically.



Short Circuit/Atomizer Protection:

Short Circuit/Atomizer Protection protects the iTaste VV4 Advanced Personal Vaporizer against shorted atomizers and will stop the unit from functioning in unsafe conditions.



The iTaste VV4 features automatic real-time atomizer Ohms detection. If the resistance of the atomizer lower than 0.8 the Ohms bar will blink.



If there is a short circuit the iTaste VV4 screen will display the following and the LED light will power off.



Over-Discharge Protection:

The iTaste VV4 Advanced Personal Vaporizer monitors the battery voltage and will automatically power off when the battery is discharged.

High compatibility 510 connector:

Threads are compatible with the following clearomizers: iClear16, iClear16B, iClear16D, iClear30, iClear30B, iClear30s, iClearX.I. Gladius and other standard 510, eGo threading.




OPERATION GUIDE

There are three main buttons on the iTaste VV4: "ⓘ" button, "+" button and "-" button. For your convenience and ease of use all iTaste VV4 functions can be activated by these three buttons to change settings in a single step without the use of a menu system. Your chosen mode will be displayed on the digital screen.

"+" button: VV4/VW+

"-" button: VV4/VW-

To POWER ON the iTaste VV4:



Pressing the power button "ⓘ" three times in rapid succession will power on the iTaste VV4 Advanced Personal Vaporizer. The main LED light will blink from red to yellow to green after which the iTaste VV4 Advanced Personal Vaporizer will enter standby mode. The final color of the LED will indicate the current power level.

When the iTaste VV4 Advanced Personal Vaporizer has been powered on Hold the "ⓘ" button down to activate the unit. The color of the LED when the button is pressed indicates the current power level.

To POWER OFF the iTaste VV4:

OFF
Click 3x ON


Ohms Meter & Battery Level Indicator & Puff Counter:

Hold both the "+" and "-" buttons simultaneously. The screen will show the resistance of the attached atomizer, the battery voltage, the number of puffs since the device was last turned off and the last set voltage or wattage.

2.5Ω 5
3.7V

Check the Ohms and battery capacity


To display the resistance of the attached load, the battery capacity and set voltage or wattage press the firing button or either the "+" or "-" button.



2.5Ω
0.0W 8.0W 

◆ Variable Wattage Mode:

Press and hold the "+" button along with the "ⓘ" button for 2 seconds to enter variable wattage mode.



2.5Ω
0.0W 8.0W 

In variable wattage mode the iTaste VV4 wattage can be adjusted from 6.0 to 15 watts in .5 watt increments by pressing the "+" or "-" buttons.

◆ Variable Voltage Mode:

Press and hold the "-" button along with the "ⓘ" button for 2 seconds to enter variable voltage mode.



2.5Ω
0.0W 4.0V 


In variable voltage mode the iTaste VV4 voltage can be adjusted from 3.0 to 6.0 volts in .1 volt increments by pressing the "+" or "-" buttons.

IMPORTANT NOTE :

When the iTaste VV4 Advanced Personal Vaporizer is powered on Hold the "+" or "-" button for 2 seconds to adjust the Voltage or Wattage. The corresponding screen indicator will blink and Voltage or Wattage will be adjusted depending on the last setting used.

To Charge the iTaste VV4


To charge the iTaste VV4 battery with the provided Micro USB cable, only use a high quality wall socket adapter or a computer USB port.
Do not charge the device unattended.
The iTaste VV4 is a passthrough device and can be vaped as it is charging.

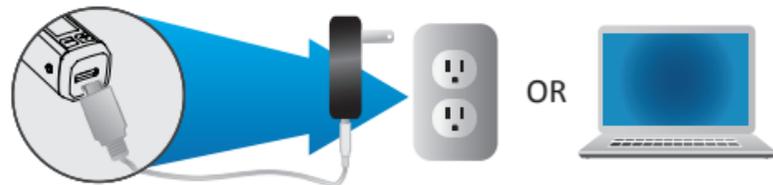

The main iTaste VV4 battery LED power light will blink from red to yellow to green, after which the iTaste VV4 battery will enter standby mode. The final LED color will indicate the current power level.

The main LED light will display green to indicate a full battery charge, yellow indicates power is at half capacity and red indicates immediate charging is required.

- Red** LED light = battery voltage is lower than 3.6V
- Yellow** LED light = battery voltage is around 3.6V-3.75V
- Green** LED light = battery voltage is higher than 3.75V

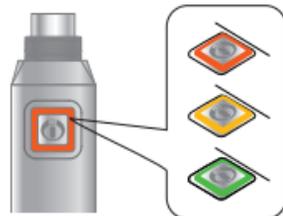

PLEASE NOTE:

The Red LED will blink for eight seconds when battery capacity is lower than 3.3V and the iTaste VV4 will automatically power off.

When the iTaste VV4 battery is fully charged the LED light on the firing button will turn green and power off.



Technical Specifications:

- Standby current:** 50uA max
- Maximum output current:** 4.0A
- Charging:** Micro USB DC5.0V/500mA
- Short Circuit Protection:** 0.8 Ohm

WARRANTY INFORMATION

Innokin Technology provides a three month after sales service warranty to all of our authorized vendors.

Please consult you're the official Innokin website or your Authorized Innokin Technology Vendor for more information and terms of service.

INNOKIN 90-DAY LIMITED WARRANTY PROGRAM

What Does This Warranty Cover?

Innokin Technology provides a limited warranty to U.S. purchasers that this new Innokin product will be free of material defects or malfunctions that arise during normal use.

How Long Does The Coverage Last?

This warranty lasts for 90 days after the date of initial purchase of a new, genuine Innokin product.

What Will Innokin Do?

Innokin will replace or repair any defective or malfunctioning genuine Innokin device at no charge, except that you must pay to ship the product to our service center in California. Replacement devices may be refurbished.

What Does This Warranty Not Cover?

This warranty does not cover counterfeit products, the "consumable" parts of your tank system vaporizers (e.g., atomizers and clearomizers), products purchased outside the U.S., or any problem that is caused by abuse, misuse, accidents, or acts of God. This warranty also does not cover products that you buy used. Innokin excludes all claims for special, incidental, and/or consequential damages caused by breach of any express or implied warranty. Innokin's liability is limited to the amount of the purchase price. **All other warranties, express or implied, including any statutory warranty or condition of merchantability or fitness for a particular purpose, is disclaimed except to the extent prohibited by law. In such event, such warranty or condition is limited to the duration of this written warranty.** This warranty gives you specific legal rights. You may have other legal rights that vary depending on where you live. Some states do not allow the exclusion or limitation of consequential or incidental damages, so the above limitation or exclusion may not apply to you.

How Do You Get Service?

To be eligible for service under this warranty you MUST return the warranty registration card, the dated receipt or purchase order, or other proof of purchase indicating the date purchased, within three months of purchasing your genuine Innokin product. Send these items to **(USA customers only):**

**After Sales Service Center
3340 Riverside Drive, Suite A/B
Chino, California 91710**

E-mail: Customerservice@innokin.com

We will inspect your device to verify that it is a genuine Innokin product, and if so, repair or replace it if it is received within 90 days of the date of purchase. Returned products received later than 90 days after the date of purchase, we will give you a price quote for the repair. If you pay the quoted price, we will repair the unit and return it to you. If you decline to pay the quoted price, we will return your device to you.

If you purchased your genuine Innokin product from an authorized retailer, you may return it to the retailer instead of shipping it to our service center. All other requirements apply.

How Does State Law Apply?

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

On the warranty registration card, you should also include the following disclaimer:

California residents: Failure to complete and return the product registration card does not diminish your warranty rights.