

User's Manual

DW-775


Wireless Headset





1. Package Contents




2. Feature – Headset

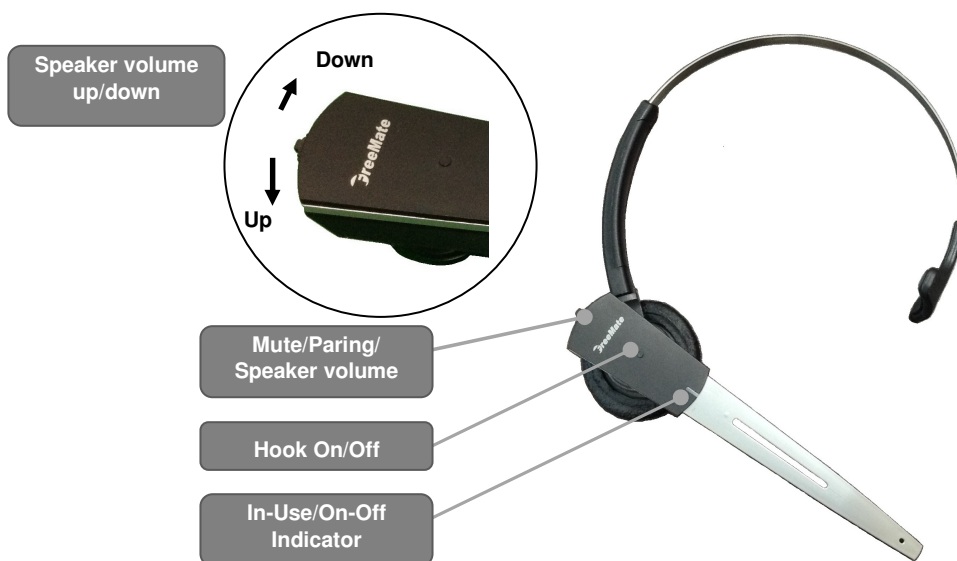

3. Feature – Base Unit

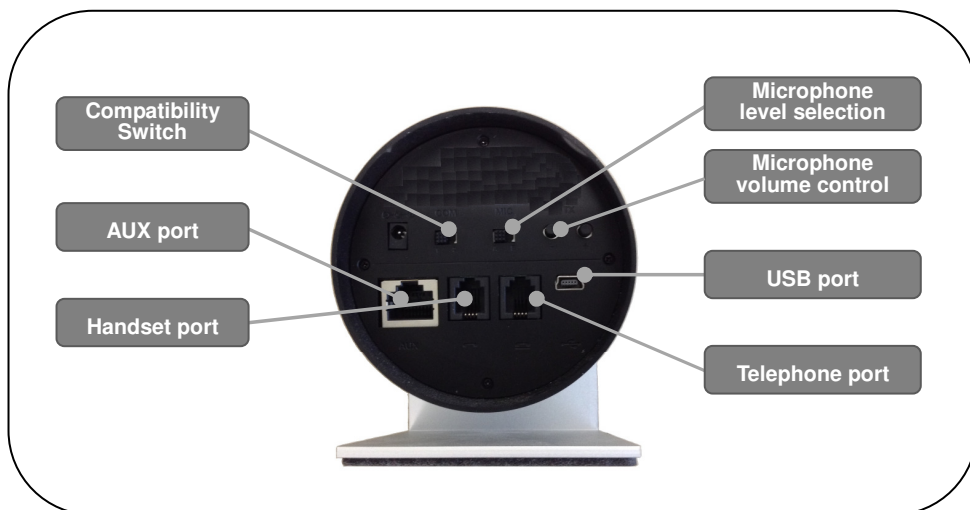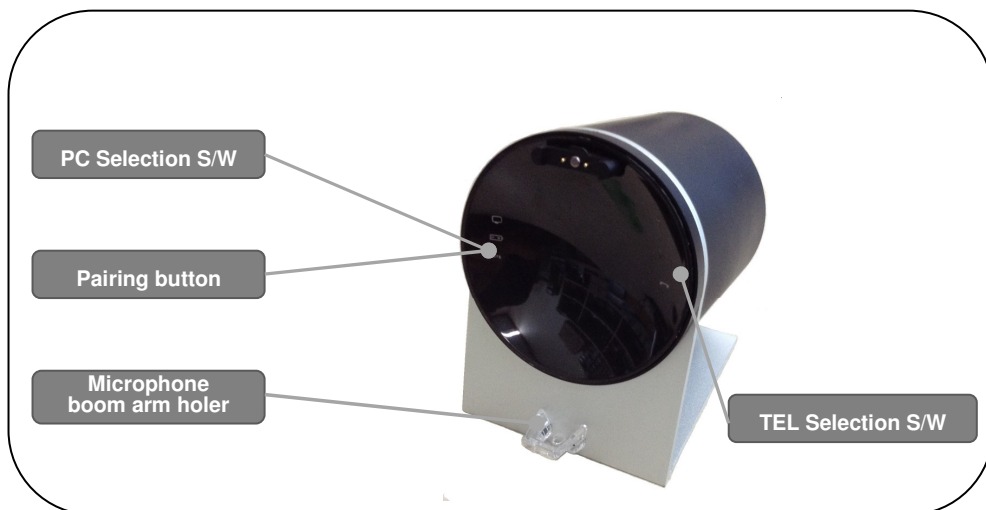

4. LED indicator

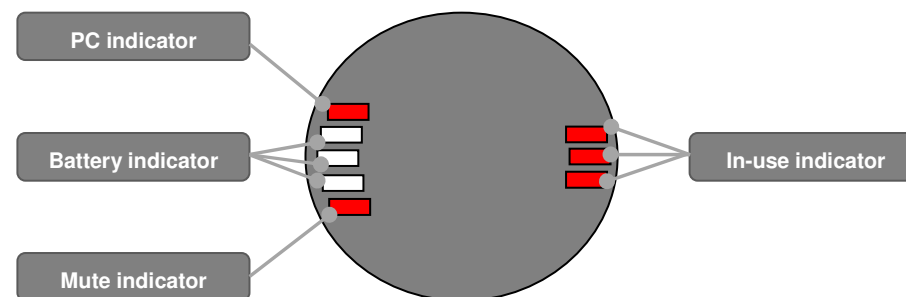

Charging Status	LEDs status(Front panel)
Charging	3 white LEDs will flash while charging
Full Charged	3 white LEDs are ON

Event	LEDs status(Front panel of the BASE)
Microphone mute	Mute indicator - ON
PC selection	PC indicator - ON
TEL selection	TEL indicator(In-use indicator) - ON
Audio Link	In-use indicator – slow flash
Pairing mode	In-use indicator – fast flash

5. Setting up the BASE

1


Connect to a desk phone

Diagram 1 (Desk phone with HEADSET port)



- Plug the supplied telephone cord into the TEL port of the BASE
- Connect the telephone cord on the HEADSET port on the desk phone

Diagram 2 (Desk phone without HEADSET port)

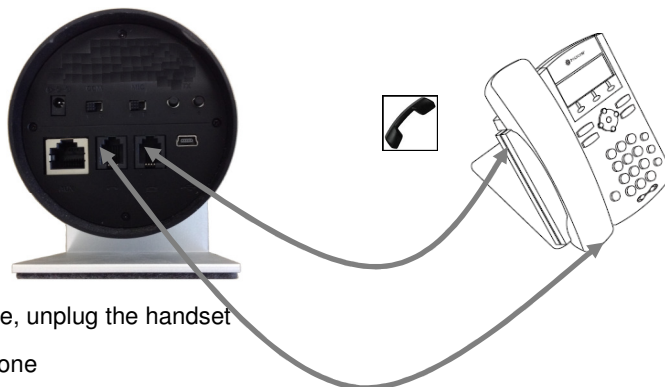

- On the desk phone, unplug the handset cable from the phone
- Connect the handset cable to the HANDSET port on the BASE
- Plug the telephone cord into the TEL port on the BASE
- Connect the telephone cord into the HADNSET port on the desk phone

(Desk phone with DL-570 LIFTER)

The DL-570 remote handset lifter manually lifts the desk phone handset to make or answer a call.

- Refer to the DL-570 installation guide

(Desk phone with EHS Adapter)

EHS Adapter enables an incoming call to be answered or ended by HEADSET on/off button.

- Refer to the EHS Adapter installation guide

2

Selection of slide switch on the back panel of the BASE

Item	Description
Slide S/W '1-2'	<ul style="list-style-type: none">- Select position '1' for most phones(Factory Setup)- Select position '2' when a phone is not working with position '1'
Slide S/W 'A-B'	<ul style="list-style-type: none">- Select position 'A' for most phones (Factory Setup) and adjust Microphone volume with Microphone(TX) volume button located on the right side.- Select position 'B' when Microphone(TX) level is still low.
Microphone(TX) volume button	<ul style="list-style-type: none">- Fine tuning of Microphone level
Receiving volume adjustment	<ul style="list-style-type: none">- Adjust receiving volume on the HEADSET

Pairing your HEADSET and Base Unit

1. Press and hold the pairing button on left side of the front panel of the BASE about 2 seconds. Release the button. (RED LEDs of the right side are blinking fast)
2. Thereafter, press and hold the mute button on the HEADSET until RED LED (OF/OFF LED on the HEADSET) is blinking. Release the button.
3. Then, the pairing is completed.

VoIP with PC (Optional)

- DW-775 is optimized for Microsoft LYNC
- Connect USB cable (option) between PC and mini USB port of BASE.
- To make call or receive through, push the PC button first and then press the ON/OFF button on the HEADSET.

Using Multi-headset

- 4 Headset can be registered to BASE unit. It means that 4 users can use headset with one BASE unit.
- After being registered all headsets, all users can hear ring alert while incoming call. User who pushes talk-button first can talk with caller.

★ For using multi-headset, each HEADSET is needed to be paired with BASE unit.

De-registering all headsets

- Unplug the power cord from the BASE unit.
- While pushing TX buttons (+/-), plug the power cord into the BASE unit.
- After 2~3 seconds, red LEDs will be ON.
- Now, all registered headsets are cleared. Register headset you want to use.

Electronic Hook Switch

The unit enables you to answer and end calls remotely by using its built-in electronic hook switch (EHS). EHS of the unit is only possible on certain telephone systems supporting EHS.

- ★ EHS is only possible on certain telephone systems. In order to determine which telephones have the EHS feature enabled, please refer to EHS guide. Please also refer to your telephone's user manual for clarification.

Optional Accessories

DL-570L Handset Lifter (Connecting to AUX port on the BASE)

This Handset Lifter has been exclusively designed for use with the unit, allowing you to answer and end calls with the touch of a button when away from your desk.

Features:

- Remote one-touch answer/end of calls
- Automatically lifts and replaces handset
- Compatible with most standard telephones
- Easy installation
- Refer to the LIFTER Guide of DL-570 for Installation & Operation.



Other Accessories (Optional)



USB Cable for VoIP