

User Manual

SCOPLLEANER™

FIBER OPTIC CLEANER COMBINED SCOPE



TheFibers™

www.thefibers.com
2013-03-12

CONTENTS

1. Welcome Message	03	7-2-3 Check Pump	16
2. Quality Assurance	04	7-2-4 Check Handset	16
3. Safety Instructions	05	7-2-5 Solvent Refill	17
4. Warnings	05	7-3 Method of Use	18
5. Precautions	06	7-3-1 Tip Assembly	18
6. Introduce of Product	07	7-3-2 Switch ON	19
6-1 Information	08	7-3-3 Check performance	19
6-2 Properties	09	7-3-4 Insert tip in adaptor	19
6-3 Originality	10	7-3-5 LCD control	19
6-4 Patent	11	7-3-6 Scoping & Cleaning	20
6-5 Application	12	7-3-7 HUXCleanr	20
6-6 Key Accounts	13	7-3-8 Cap	20
7. Description of Product	14	8. USB Capture Device	21
7-1 Specification	15	9. Trouble Shooting	22
7-2 Installation	16	10. Part Number	23
7-2-1 Power	16		
7-2-2 Check LCD	16		

1. Welcome Message

First of all, we would like to express our appreciation for purchasing **Scopleaner™**. We hope that **Scopleaner™** of TheFibers Inc can assist you with optical equipment, maintenance and repair of the apparatus.

Scopleaner™ scopes and cleans (washes) ferrule fiber optic of work places and job sites and is therefore excellent equipment. You will be able to use this equipment to observe the fiber optic system, optic module and optic apparatus cleans ferrule fiber at the same time. I strongly believe that the **Scopleaner™** which is the first cleaning apparatus combined scoping apparatus worldwide will become your great helper.

Please check if all parts have been delivered with the purchased **Scopleaner™** before you start using it. Please contact our service below, if anything is missing. We will solve the problem immediately.

TheFibers Inc.

A-1109 Keumkang Penterium IT Tower, 282 Hagui-ro, Anyang-City, Korea

Tel: 031-381-6108

Fax: 031-381-6109

Email: sales@thefibers.com

2. Quality Assurance

At the time of sending out Scopleaner™, the apparatus has passed several tests. In case apparatus is defect before use, please give us a call (see information on previous page).

TheFibers, Inc. provides a warranty for a time period of one year from date of original purchase for quality of the item. Within this period, we are responsible for all repair and replacement costs, the customer just pays for shipping to TheFibers.

We do not provide warranty in the following cases:

- **quality assurance cap is damaged or removed**
- **sticker with serial number is damaged or removed**
- **damages resulting from use of mistakes of the user**
- **damages resulting from use of inappropriate parts**
- **Open Scopleaner-5 without consent of Supplier**



3. Safety Instructions

- ▶ Please read and follow safety instructions to assure safe and correct use of the apparatus and to prevent dangerous situations
- ▶ Safety instructions are stated in “warning” and “caution” and have the following meaning:

Warning: signifies a serious potential for property damage, personal injury or death

Caution: signifies a potential for trivial property damage


4. Warning

- ▶ Do not touch the terminal block when apparatus is powered on, due to the risk of electric shocks and other danger.
- ▶ Avoid metallic items and water in the inside of the apparatus; this might lead to fire, electric shocks, electric leakage, and other danger.

5. Caution

- **Do not use apparatus for other purposes than cleaning fiber optic.** The apparatus was developed to scope and clean fiber optic. If it is used for other purposes, we do not warrant for damages resulting from inappropriate use.
- **Do not use other adaptors.** We do not warrant for damages resulting from using other adapters. **Scopleaner™** and accompanying AC are in accordance with FCC/CE standards. We do not take any responsibilities for errors or damages that result from using other AC adapter.
- **Do not modify or disassembly apparatus.** If apparatus is disassembled or operated otherwise than stated in the manual, we do not warrant for damages resulting therefrom.
- **Do not use other solvents than suggested.** If other solvents or materials than suggested in the manual are used and filled into the solvent tank, we do not warrant for damages resulting therefrom.

6. Introduce of Product

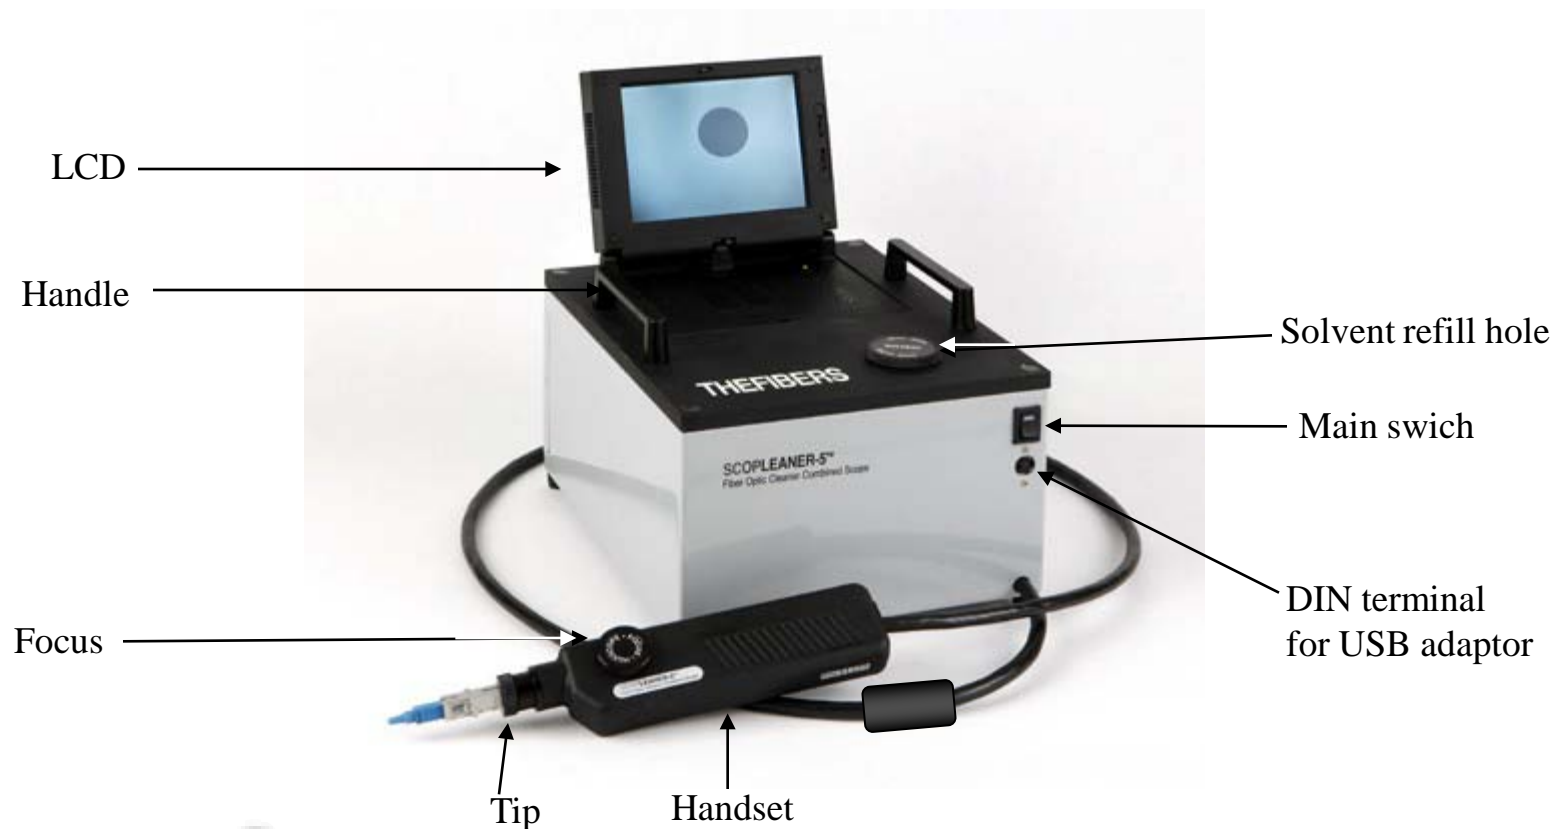


6-1. Information


Scopleaner™ is a cleaner combined scope for connector ferrule used on parts of fiber optic.

During connecting fiber optic parts each other, ferrule surfaces in parts should be clean because should removing dust and foreign substances prevent loss and return of signal. It is an inconvenient and difficult process at field which is used optical fiber parts like connector and attenuator to hold up the fiberscope and insert the adapter, adjust the focus, identify the fiber section, insert the cleaner into the adapter, clean, hold up the fiberscope and check cleaning results.

Scopleaner™ is the first fiber optic cleaner combined scope worldwide. Cleaning nozzle which can be disassembled and spray with refillable cleaning liquid and the fiberscope (video microscope) accurately form a line and enables to use both functions of scoping and cleaning; the improved combine tip even allows a “scoping – cleaning – scoping” process with one move.

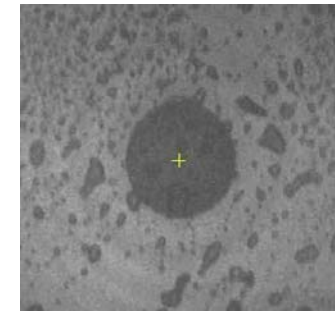

[before cleaning]



[after cleaning]

6-2. Properties

- Cleaning dynamization: The inconvenient cleaning process becomes very easy with the **Scopleaner™**. Enterprisers for Backbone network of each country dominate the fiber optic market. If you compare the old fashioned method that engineers used with the new apparatus you will see that the “optical fiberscope cleaner” is an epoch-making discovery. Especially due to the fact that the apparatus is portable, engineers can easily carry it with them.
- Reduction of cleaning time: The average time for the whole standard program “scoping – cleaning – scoping” takes about 5 seconds. **Scopleaner™** is capable to do all three processes simultaneously in 5 seconds. This is a great advantageous property, especially because Labor Costs can be reduced to 67%.
- Improvement of quality: **Scopleaner™** reduces errors during the cleaning process and prevents from harmful damages caused by contact and reflection; errors are minimized and quality is improved. This helps to reduce of maintenance fees and ensures improvements of quality and a improvement of the broadband communication.

6-3. Originality


Scopleaner™ has the originality to be the first cleaner combined fiber optic scope worldwide. The invention and development of combined mechanism of “fiberscope” and “cleaner” was registered at the patent office; it has a pending status at the PCT (patient cooperation treaty) at present.

○ existing cleaning method (7 steps):


insert scope and focus ► remove scope ► insert cleaner ► cleaning ► remove cleaner ► insert scope and check cleaning results

○ new cleaning method (3 steps):

insert scope and focus ► find foreign substances ► turn switch and check cleaning results

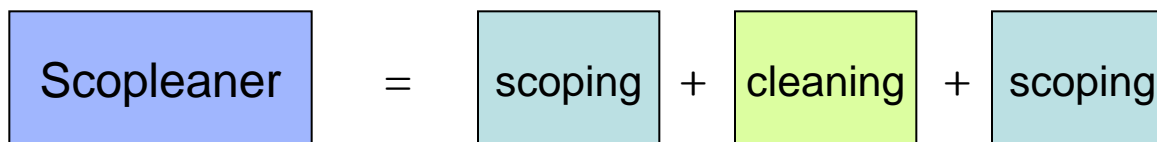

6-4. PATENT



특 허 증

CERTIFICATE OF PATENT

특 허 제 10-0718601 호 (PATENT NUMBER)	출원번호 APPLICATION NUMBER 2006년 12월 15일 등록일 REGISTRATION DATE	제 2006-0128544 호 2006년 12월 15일 2007년 05월 09일
--	--	--


발명의명칭 (TITLE OF THE INVENTION)
스프크 결속 팔리니

특허권자 (PATENTEE)
주식회사 디라이비스 (134111-Q*****)
경기 안양시 동안구 관왕동 1590 안양시청 704


발명자 (INVENTOR)
한규철 (630207-1*****)
경기 안양시 동안구 재촌동314 귀인마을 현대오피스 105동 1005호

위의 발명은 「특허법」에 의하여 특허등록원부에 등록되었음을 증명합니다.
 (THIS IS TO CERTIFY THAT THE PATENT IS REGISTERED ON THE REGISTER OF THE KOREAN INTELLECTUAL PROPERTY OFFICE.)



2007년 05월 09일



특 허 증
COMMISSIONER, THE KOREAN INTELLECTUAL PROPERTY OFFICE




[Patent registration certificate]

방급번호 : 5-5-2007-019945861 				
<h1>출원사실증명원</h1> <h2>CERTIFICATE OF APPLICATION</h2>				
출원인 Applicant	성명 Name	HAN, Gyu cheol	주민번호 Residence No	
	주소 주소	105-1005, Hyundai Hometown, Gwin Maeul, 314 Pyeongcho-dong, Dangsan-gu Anyang-si, Gyeonggi-do 431-070 Republic of Korea	전화번호 전화번호	
	상품명 Name	THE FIBERS INC.	주민번호 Residence No	
	주소 주소	*704 Anyang-City Hall, 1990 Gwangyang-dong, Dangsan-gu Anyang-si, Gyeonggi-do 431-060 Republic of Korea	전화번호 전화번호	82-31-381-6108
발명자 Inventor	성명 Name	HAN, Gyu cheol	주민번호 Residence No	
	주소 주소	105-1005, Hyundai Hometown, Gwin Maeul, 314 Pyeongcho-dong, Dangsan-gu Anyang-si, Gyeonggi-do 431-070 Republic of Korea	전화번호 전화번호	
출원번호 Application Number		PCT/KR2007/001719	출원일자 출원일자	년 월 일
발명(과학)의 명칭, 디자인을 포함할 물론, 상품(서비스)류 구분 Title of Invention, Product(s) Embodied in Design, or Classification of Mark		APPARATUS FOR CLEANING AND SCOPING OF OPTICAL FIBER		
출원도 출원도		제출용		
최종지본 상태			최종지본일	
위 사실을 증명함. This is to certify that the above applicant has filed as stated in this certificate at the Korean Intellectual Property Office				
2007년 04월 16일 특 허 장 COMMISSIONER				

* 출원인 또는 특허출원자 발급요청사항, 특허청 홈페이지 www.kipo.go.kr 특허청, 한국지식재산위원회 또는 한국지식재산 협회
 * 출원인 또는 특허출원자 발급요청사항, 특허청 홈페이지 www.kipo.go.kr 특허청, 한국지식재산위원회 또는 한국지식재산 협회

[PCT pending]

6-5. Application

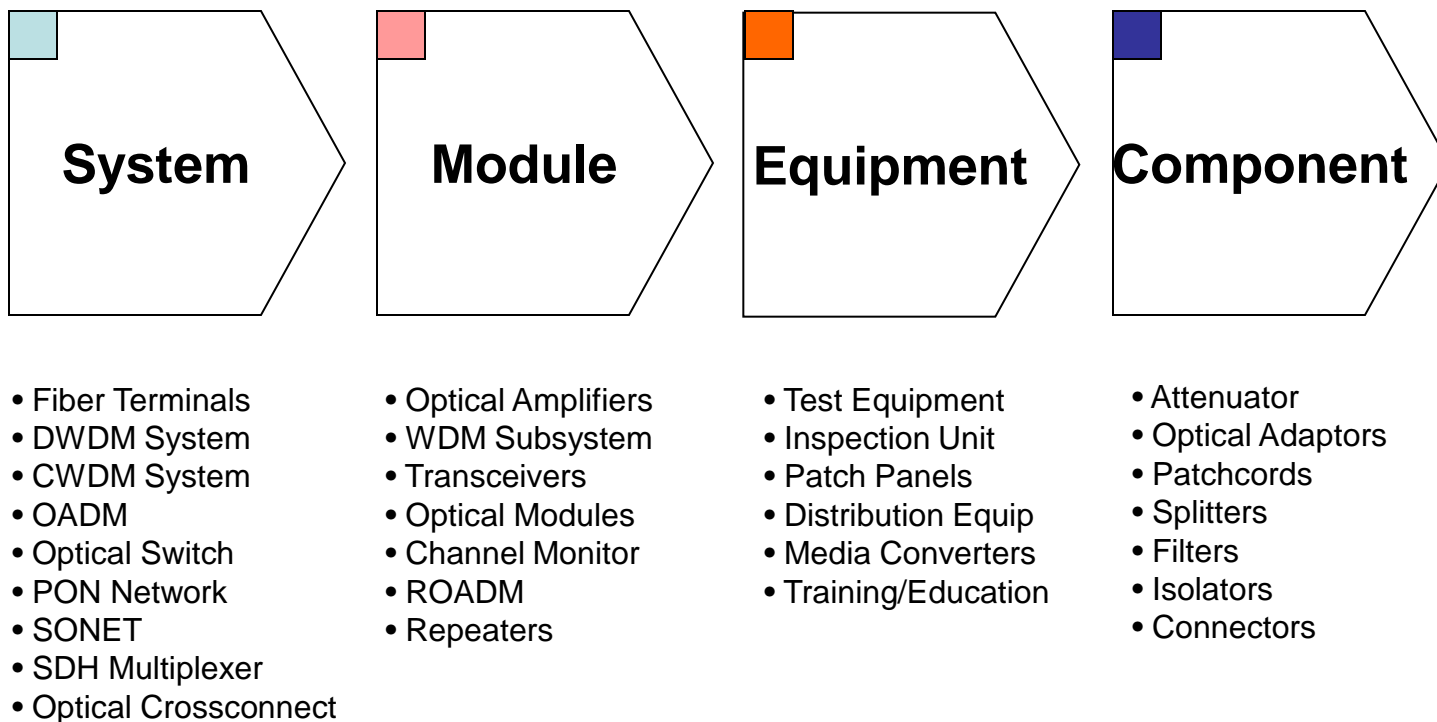

6-6. Key Accounts

❑ Important key accounts: a enterpriser for backbone network

▪ Domestic: Korea Telecom, Hanaro Telekom, Powercom, KTF, SKT, LGT, etc

▪ Abroad: AT&T, BY, NTT, China Unicom, France Telecom, UK Cable and Wireless, Deutsche Telecom, Sprint, Swiss Telecom, Italia Telecom, Voice Stream Wireless, Vodafone Air Touch, Hutchison 14, KPN, Bellsouth, etc.

❑ Next target: partnership with key communications network industry/cooperation with construction company (installers)

❑ fiber optic system and server equipment, module, etc. supplying network construction companies, key accounts like Nortel, JDSU, Lucent, Alcatel, ADC, Sisco, Juniper, Liverston, Extreme Networks, 3 Com, Huawei, etc.

7. Standard Package


• Main Apparatus + Handset ----- 1 Set -----



• SC/PC & FC/PC female side Cleaning Tip -----1 piece -----



• Rubber Cap -----1 piece -----



• Transport Bag -----1 piece -----



• HUXCleaner - 2.5 -----1 piece -----



• Funnel -----1 piece -----



• AC Power Cord -----1 piece -----



[Optional]

• USB Cable -----1 piece -----



• Solvent -----250ml -----



7-1. Specification

Cleaning Method	Solvent Non-Contact Cleaning System Use 3M Solvent (P/N:HFE-72DE) Non-Flammable, Zero Ozone Depletion
Driving Type	Compressed air by Pump
Cleaning time (scoping-cleaning-scoping)	5 sec
Cleaning tip	SC/PC & FC/PC Female Tip (standard)
Light source	LED (Internal)
Power	SMPS (Internal) by AC 100~240V
LCD and magnification	5.6" TFT LCD, 260X
Dimension	206(w) x 272(l) x 156(h)mm
Weight	8kgs

7-2. Product Installment

For your safety, please read the safety instructions carefully before installing the product. The apparatus uses internal AC/DC adaptor for power. So never open the adaptor cover at discretion. Please check your code type and volt before connecting code.

7-2-1. Connecting power : Connect power cord with power outlet at the backside of the apparatus. AC range can be used for 100~240V. Turn the power switch on.

7-2-2. Check LCD: 2 button by LCD are used to control brightness and contrast each. Rotate focus button to adjust.

7-2-3. Check Pump : A cleaning with the **Scopleaner™** requires compressed air. To obtain compressed air, a pump can be used. To fill compressed air, the pump is operated for 10 sec when turning power on automatically. To check whether the refill cap has been installed properly. If you hear air escaping from the cap, the cap should be taken out and installed again.

7-2-4. Check Handset : Handset has 2 function : scoping and cleaning. To check cleaning, push the start button about twice and check whether some solvent is burst out. To check scoping, please see the lens. Never lens has pollutants like finger print or dust. Always keep the lens clean.

7-2. Product Installment

7-2-5. Solvent refill: **Scopleaner™** bursts out a solvent into the compressed air to make cleaning process possible. For the solvent, 3M Solvent (P/N:HFE-72DE), which can be easily obtained in stores locally is used. 3M Solvent is not flammable and is ozone-friendly. Please see the attached Material Safety Data Sheet for further information. To refill solvent, pull the refill cap which is on the upper part of the apparatus to your left, open and refill the solvent with a funnel. Afterwards, turn the refill cap clockwise all the way.

Do not refill more than 250 ml at once.



Caution: The solvent is not flammable, but it is recommended to store the solvent at room temperature. Keep out of reach of children. Please check is cap is placed appropriately before storing, because evaporation would minimize cleaning effects. Store away from heat or open flames . Do not swallow and inhale. If it comes in contact with eyes, wash immediately with plenty of water. If it comes in contact with skin, rinse immediately


7-3. Method of Use

Scopleaner™ is very simple to use. It is yet recommended to know about a few operational facts, e.g. tip exchanging, etc. Please read the following instructions carefully:

7-3-1. Tip assembly and exchange: The apparatus comes with SC/FC tip for 2.5mm Ferrule type. If necessary, Tip can be exchanged. Tip has a Nut Screw thread to connect tip with a handset. If tip is turned, it can be easily assembled and disassembled. Insert the end of the nozzle pooping out from the front side of the handset into the tip and turn the Nut (screw thread).

The end of Nozzle must be fitted well into Nozzle Hole of Tip. To help it, the Guide of Tip should be fitted well into the Guide Hole.

Do not place hands on the lens during this process. Substances on the lens can affect the quality. If lens is contaminated, use a cotton swap or a lens cleaning tissue.

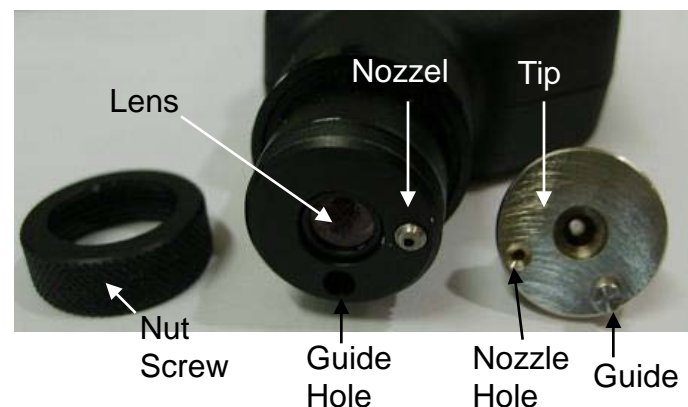



7-3. Method of Use

7-3-2. Turn on the main power switch.

7-3-3. To check cleaning performance, push the start switch about twice and check whether some solvent is burst out well.

7-3-4. To insert the tip into an optical adapter to see : place tip on the ferrule surface, turn the button of the focus on the handset and tune until a clear picture is obtained.

7-4-5. Use the contrast and bright buttons on the side of the LCD panel to adjust LCD monitor.

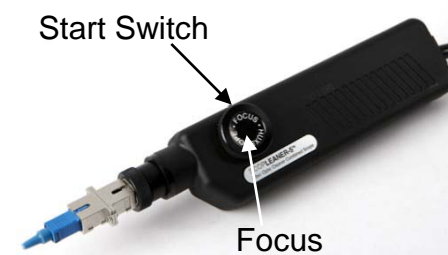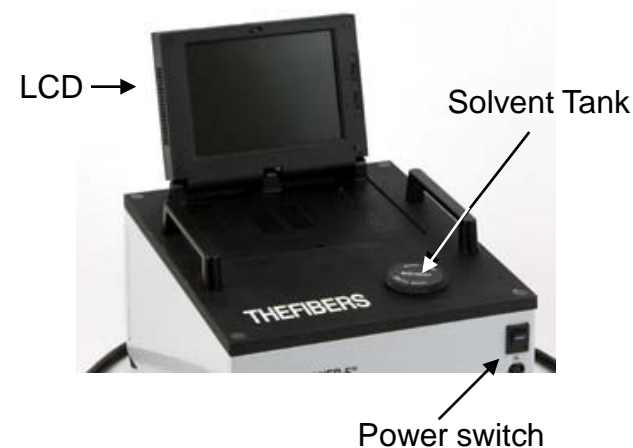

7-3. Method of Use

7-3-6. If contaminants are detected on LCD screen, slightly press the start switch on your handset. Cleaning will start immediately. Please check the results of the cleaning.

7-3-7. If cleaning result is not satisfying, press the start switch again and / or use HUXCleaner enclosed afterwards.

7-3-8. After cleaning results are checked, tip is separated from optical adapter and closed with a cap.

Caution: If apparatus was not used for more than 3 hours, push the start switch over twice. In case of apparatus is used after long time break or weekend break, please push the start switch about 10 times before actual cleaning.



Contaminations

8. USB Cable

A USB cable can be optionally delivered with the **Scopleaner™**. If USB cable is plugged into the DIN connector of the side of the apparatus and connected to a computer, the screen on LCD will be shown on the computer monitor. Pictures can be saved by using the capture function on the computer.

Easy-to-install software is delivered with the USB cable. Place CD in the CD-Rom of the computer, program will be installed automatically.

Insert USB cable into DIN and computer each before running the program. After optical adapter ferrule surface is seen on the screen, use capture button to save on computer.



DIN terminal for USB adaptor



USB to Computer

DIN

9. Trouble shooting

Problem	Cause	Solution
Low cleaning effect	Air pressure of cleaning tank minimized	Check whether solvent refill cap is closed tightly well.
	Lack of solvent	Refill solvent
	Inappropriate assembly of tip	Disassemble and re-assemble tip
	Damage of tip	Replace tip
	Spread of solvent on ferrule surface after 1st cleaning	Use HUXCleaner
Cleaning switch or main switch does not work	Power supply not connected	Check power connection
	Main switch is OFF	Main switch is ON
LCD screen does not work or not clear well	Problem of adjusting Contrast and Bright functions	Adjust Contrast and Brightness
	Contamination of lens	Remove pollutant on lens
	Static Electricity by Hand	Main Power Switch OFF and ON again

10. Part Number

Scopleaner-5	Fiber Optic Cleaner Combined Scope Set
Scopleaner-T-SF	Scopleaner Tip for SC/PC and FC/PC Female side
Scopleaner-T-L	Scopleaner Tip for LC/PC Female side
Scopleaner-T-2.5	Scopleaner Tip for 2.5mm/PC Male side
Scopleaner-T-1.25	Scopleaner Tip for 1.25mm/PC Male side
Scopleaner-AC	AC 100~220V Power Cord
Scopleaner-CAP	Cap for Scopleaner
Scopleaner-B	Hand-carry Bag/Case for Scopleaner
Scopleaner-USB	USB Cable with Software for Scopleaner
Scopleaner-H25	HUXCleaner-2.5
Scopleaner-SOL-R	Solvent for Refill 250ml
Scopleaner-F	Funnel

Contents of this manual can be modified without notice. Manual may not be modified without permission.

The latest version of the manuals can be downloaded from the webpage: www.thefibers.com.