

Crestron CLX-2IND

2 Channel Inductor Module

- > Adds noise suppression for (2) 120 Volt dimmed loads
- > Compatible with CLX-DIM and CLX-DELV series modules
- > Occupies 1 module space in a CAEN automation enclosure
- > Easy termination using CLT-Series terminal block

The CLX-2IND inductor module provides noise suppression for up to 2 dimmed loads. Each channel inserts a high-inductance filter choke inline between any channel of a CLX-Series dimmer module and its load. The CLX-2IND occupies a single module space in a CAEN automation enclosure. Termination of high-voltage wiring to the module is facilitated by a CLT-2IND terminal block, sold separately to enable termination of the wiring anytime prior to installing the module.

SPECIFICATIONS

Load Ratings

Inductor Channels: 2

Per Channel: 16 Amps (1920 Watts)

Module Total: 32 Amps (3840 Watts)

Voltage: 120 Volts AC, 50/60Hz


Performance

Rise Time: 350 μ Sec minimum at full load

Connections via CLT terminal block (sold separately)

IN (1 – 2): (2) DIN rail terminal blocks, black
Inputs from CLX dimmer module(s)

OUT (1 – 2): (2) DIN rail terminal blocks, red
Outputs to loads

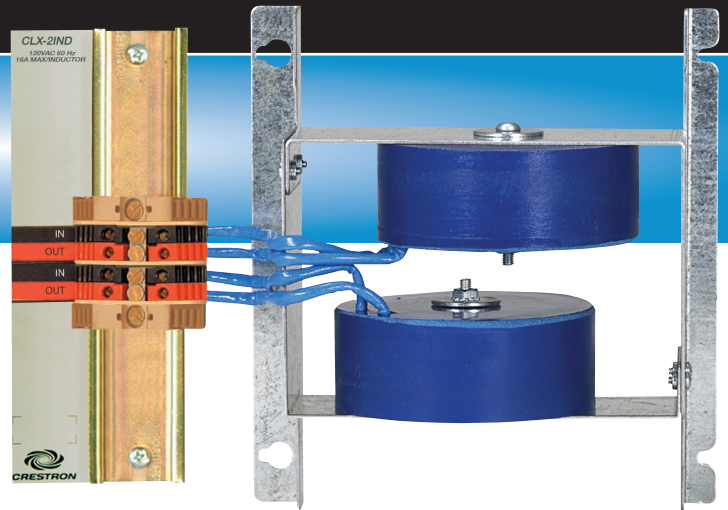

Shown with CLT-2IND Terminal Block

Environmental

Temperature: 32° to 104°F (0° to 40°C)

Humidity: 10% to 90% RH (non-condensing)

Enclosure

Surface mount chassis with (2) integral mounting flanges
Occupies 1 module space in any CAEN enclosure

Dimensions

Height: 7.40 in (18.80 cm)

Width: 6.92 in (17.57 cm)

Depth: 3.86 in (9.79 cm)

Weight

6.00 lb (2.72 kg)

AVAILABLE ACCESSORIES

CAEN Automation Enclosures

CLT-2IND Terminal Block