

C441M Motor Insight™ Modbus Communication Module Product Installation Leaflet

Mounting Instructions

To mount the Modbus® communication module to the Motor Insight overload relay, first make sure power is disconnected. Next, align the communication module with the overload relay, using the 10-pin header as reference for the correct orientation. Hook the lower tabs (furthest from the 10-pin header) into the base unit, and then rotate the communication module into position until a click is heard.

Quick Start

The following parameters configure the Modbus communication interface. Parameters may be set either with the user interface or through the Modbus port. For more information on setting the parameters via the user interface, please reference user interface section of Motor Insight User Manual MN04209001E.

TABLE 1. MODBUS PARAMETERS

| MODBUS PARAMETER | UI INTERFACE | MODBUS REGISTER | DEFAULT | NOTES |
|---------------------------------|--------------------------|-----------------|----------------------|--|
| Modbus Address | Operation Parameter | 431 | 1 | Must be unique and between 1 and 247. |
| Modbus Baud Rate | Advanced Parameter P00 | 432 | 19.2K | Requires power cycle reset to take effect. |
| Modbus Parity | Advanced Parameter P01 | 442 | 8,e,1 | 8 data bits, even parity, 1 stop bit. Requires power cycle reset to take effect. |
| Comm Loss Behavior [Ⓞ] | Advanced Parameter P04 | 441 | 1 | Default is 1 for fault. |
| Comm Loss Timeout | --- | 440 | 2000 | 2 seconds. |
| Configuration Reset | Advanced Parameter P0.05 | 402 | 0, no reset asserted | Set to 1 to give power cycle reset (soft reset). Clears after reset asserted. |

[Ⓞ]To enable comm loss behavior, write 136 to register 400.

Register Set

Please see the Motor Insight User Manual, MN04209001E for details on the Modbus register space.

TABLE 2. SPECIFICATIONS

| PARAMETER | VALUE |
|--|--|
| Mode | Slave mode only |
| Modbus Address/Slave Address | 1-247 (0 for broadcast) (1 is default) |
| Baud Rate | 1200 Bd to 115k Bd (19,200 Bd default) |
| Byte Characteristics | 8-bit. Even parity (default), 1 stop bit (default) Options: 8-bit, no parity, 2 stop bits 8-bit, odd parity, 1 stop bit |
| Slave Response to Master | 10 ms plus the time it takes to transmit response (when applicable) |
| Commands Supported | 0x01 Read Coils 0x02 Read Discrete Inputs 0x03 Read Holding Registers 0x04 Read Input Register 0x05 Write Single Coil 0x06 Write Single Register 0x0F Write Multiple Coils (15) 0x10 Write Multiple Registers (16) 0x17 Read/Write Multiple Registers (23) 0x2B/0x0E Read Device Identification Get Device Identity (43/14) |
| Protocol Supported | Modbus RTU |
| Electrical Signaling | RS-485 (ANSI/TIA/EIA-485), Two-wire |
| Checksum | CRC 16-bit 0x8005 (for CRC-CCITT 0x1021) |
| Max. Data Signaling Error Accepted | 2% in reception, 1% in transmission |
| Max. Number of Devices | 32 (1 unit load per RS-485); Note: line polarization will reduce max. # of devices by 4. |
| LED Indication | Frame Reception (Rx) - Yellow Frame Transmission (Tx) - Yellow |
| Max. cable Length | Dependent on baud rate, cable characteristics (gauge, capacitance or impedance), number of loads. 4000 ft. max. theoretical. Reference MODBUS-IDA over Serial Line Specification and Implementation Guide and EIA-485 for details. |
| Max. Number of Writes to Non-Volatile Memory | Unlimited |
| Connector Style | Screw terminal |
| Network Topology | Two-wire Modbus, Daisy-chain and/or repeater |
| Line Polarization | Not required. Reference MODBUS over Serial Line Specification and Implementation Guide and EIA-485 for more information. |



Powering Business Worldwide

TABLE 3. MODBUS FIELD WIRING

| PIN # | CIRCUIT | EIA-485 NAME | RECOMMENDED WIRE COLOR | DESCRIPTION |
|-------|---------|--------------|------------------------|---|
| 1 | Common | C/C' | Grey | Signal and optional power supply com. |
| 2 | D1 | B/B' | Yellow | Transceiver terminal 1, V1 Voltage, Data + (V1>V0 for binary 1 [OFF] state) |
| 3 | N/C | | | |
| 4 | DO | A/A' | Brown | Transceiver terminal 0, V0 Voltage, Data - (V0>V1 for binary 0 [ON] state) |
| 5 | N/C | | | |

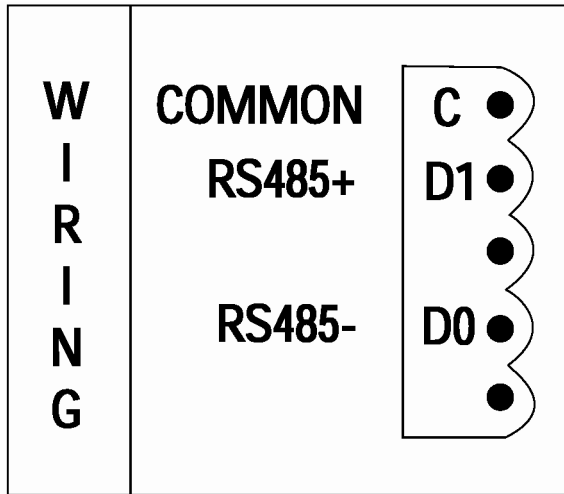


FIGURE 1. TERMINAL

TABLE 4. ENVIRONMENTAL SPECIFICATIONS

| DESCRIPTION | SPECIFICATION |
|----------------------------------|--------------------------|
| Ambient Operating Temperature | -20°C to 50°C |
| Storage Temperature | -40 to 85°C |
| Operating Humidity | 5% to 95% non-condensing |
| Pollution Degree per IEC 60947-1 | 3 |
| Overvoltage Category per UL@ 508 | III |
| Altitude | 2000m |
| Vibration | 3g in any direction |
| Shock | 15g in any direction |

Eaton Corporation
Electrical Sector
1000 Cherrington Parkway
Moon Township, PA 15108
United States
877-ETN-CARE (877-386-2273)
Eaton.com

© 2008 Eaton Corporation
All Rights Reserved
Printed in USA
Publication No. IL04209002E
July 2010 Rev.002



TABLE 5. EMC/EMI

| DESCRIPTION | SPECIFICATION |
|-------------------------------------|--|
| Radiated Emissions | IEC 60947-4-1 - Table 15, EN 55011 (CISPR 11) Group 1, Class A, ISM Equipment for Industrial, Scientific, and Medical Equipment. 30 MHz to 1000 MHz. |
| Conducted Emissions | IEC 60947-4-1 - Table 14, EN 55011 (CISPR 11) Group 1, Class A, ISM Equipment for Industrial, Scientific, and Medical Equipment. 0.15 MHz to 30 MHz. |
| ESD Immunity | IEC 60947-4-1, +/-8 kV air, +/-4 kV contact. |
| Radiated Immunity | IEC 60947-4-1 10V/m 80 MHz - 1000 MHz 80% Amplitude Modulated 1 kHz sine wave. |
| Conducted Immunity | IEC 60947-4-1 140 dBuV (10V RMS) 150kHz - 80 MHz |
| Fast Transient Immunity | IEC 60947-4-1 and IEC 61000-4-4 +/-2kV |
| Surge Immunity | IEC 60947-4-1 IEC 61000-4-5 Class 3. |
| Voltage Variations Immunity | IEC 60947-4-1 30% dip @100 ms 60% dip @10 ms >95% interrupt @5 ms |
| Power Freq. Magnetic Field Immunity | IEC 60947-4-1 30 A/m, 50Hz |

Reference:

User Manual MN04209001E.



PowerChain Management®

PowerChain Management is a registered trademark of Eaton Corporation.

All other trademarks are property of their respective owners.