

Thank you for purchasing the BBS010 Slim Hands-Free Speaker from BEEWI. Please read the following instructions to learn how to configure and use more effectively your product.



The BBS010 Slim Speaker is a high performance full duplex hands-free solution specially designed for users to enjoy the convenience and freedom of wireless hands-free communication in the car, but also at home or in the office. It includes advanced built-in microphone and 1W speaker with Digital Sound Processor (DSP) for echo cancellation and noise reduction that gives a loud and clear full duplex sound quality.

The BBS010 Slim Speaker is a Bluetooth 2.1+EDR wireless speaker compatible with all Bluetooth compliant devices using HFP profiles such as mobile phones.

Warning: always obey local legislation regarding the use of mobile phones in the car.

1. Product Description

1.1. Packaging content


- Bluetooth Speaker
- USB cable
- 12-24V Car Adapter with USB port
- Car visor clip
- User Manual CD

1.2. Features

- Full Duplex, background noise reduction with CVC Digital Signal Processor (DSP)
- Multipoint Technology to connect 2 mobile phones simultaneously
- Extra slim size and light weight
- No installation required
- Up to 1000 hours standby time and 5 hours continuous talk time under normal usage.

1.3. Product overview

- (1) Speaker
- (2) Microphone
- (3) LED
- (4) Charging Socket (Micro-USB)
- (5) MFB (Multi-Function Button)
- (6) Volume Up (V+) & Down (V-)

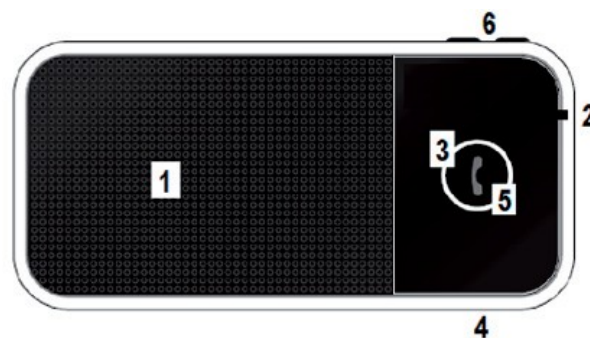

1.4. Product Specification

Bluetooth Specification	Bluetooth V2.1+EDR
Bluetooth Profiles	HSP - HFP1.5
Frequency Band	2.4GHz~2.48 GHz ISM Band
Power class & range	Class 2, Up to 10 meters
Number of Paired Devices	Up to 8 devices
Max Audio Output Power	1 W
Standby Time	Up to 1000 hours (40 days)
Talking Time	Up to 5 hours
Battery	340mAH Li-Polymer rechargeable battery
Battery Charging Time	Up to 2 hours
Dimensions	100L x 48W x 8D mm
Weight	42 g

2. Using the product

2.1. Car Installation

Insert the metal clip on the back of the speaker and clip it on driver's car visor. Make sure the speaker is firmly attached with the microphone pointing towards the driver.

2.2. Charging

Prior to using the speaker the first time, it is recommended to fully charge the battery. Normal full charge time is approximately 2 hours. The red LED will stay on while charging and will be off as soon as it is completed.

IMPORTANT:

- Charging indication will be delayed by a few minutes if the speaker has not been used for a long time or the battery is drained.
- To prolong battery life, it is recommended to charge the speaker as soon as the low battery indicator is shown.

2.3. Power On / Power Off

Power On: press and hold the MFB button for 3 seconds until you hear a short beep. The flashing blue LED light indicator comes on, and the speakerphone automatically connects to the mobile phone it has been paired with already.

Power Off: press and hold the MFB button for 3 seconds until you hear a short beep. The flashing red LED light indication goes off.

2.4. Pair and connect

Refer to the Bluetooth pairing procedures in the mobile phone user manual.

When the speaker is off, long press the MFB button for about 5 seconds until the light indicator flashes red and blue alternatively, then release the button. The alternated flashes indicate that the speaker is in pairing mode.

Search for Bluetooth devices in the phone, select "BeeWi BBS010" on display and enter the pass key "0000" to add the speaker to the pair list. When pairing is complete, the blue and red LED light will stop flashing, and the speaker will automatically connect to the phone and go in standby mode with the blue light flashing every 3 seconds.

Check the connection by placing a call from your phone.

Note: If the pairing cannot be completed within 2 minutes after the pairing mode is activated, the speaker will power OFF automatically. Repeat the steps above to pair the speaker and mobile phone again.

2.5. Status indicators

Status	LED	Descriptions
Power On	Blue	3 seconds flash
Power Off	Red	3 seconds flash, then Off
Pairing	Blue/Red	Alternated blinking
Standby Mode (Connected)	Blue	Blinking every 3 seconds
Standby Mode (Disconnected)	Blue	Blinking twice every 3 seconds
During Communication	Blue	Blinking every 6 seconds
Low Battery	Red	Blinking every 3 seconds
Charging	Red	Light on
Charging Completed	Red	Light off

2.6. Connection

The speaker automatically connects to the last connected device when it is turned on. If the device is not found, the speaker will connect to a previous device in the paired list.

In case the connection is not made automatically, it is possible to reconnect manually either from the speaker by pressing the MFB or from the mobile device (refer to the phone user manual). It is also

possible to disconnect the speaker either manually or by moving out of range. When losing the connection/link, the speaker will automatically power off after 15 minutes.












2.7. Multipoint

The Multipoint function allows a simultaneous connection to 2 mobile phones. In default setting of the speaker's Multipoint function is disabled.

- To enable Multipoint function: in standby mode, press and hold “V+” button for 3 seconds until a beep is heard. If 2 mobile phones are already paired to the speaker, they will connect automatically when powering on the speaker.

- To disable Multipoint function: in standby mode, press and hold “V-” button for 3 seconds until a beep is heard. The speaker will turn off multipoint function and power off automatically. When powering on again, the speaker will only connect to the last connected Bluetooth device.

2.8. Function Matrix

Feature	Key	Conditions	Operation
Power On		Powered off	Long press 3 seconds
Power Off		Powered on	Long press 3 seconds
Pairing		Powered off	Long press 6 seconds
Answer a call		Incoming Call	Short press
Hang up a call		Talking	Short press
Reject incoming call		Incoming Call	Long press 3 seconds
Voice dial/Cancel Voice Dial		Standby Mode	Short press
Last number redial		Standby Mode	Short press twice
Switch active calls*		2 Calls in process	Short press twice
Hang up call 1 and answer call 2*		2 Calls in process	Short press
Reject call 2*		2 Calls in process	Long press 3 seconds
Switch audio to/from phone	+ & -	In call	Simultaneous press
Mute microphone	-	In call	Long press 3 seconds
Un-mute microphone	+		Long press 3 seconds
Volume up	+	In call	Short press
Volume down	-	In call	Short press

* 3-way calling not supported if Multipoint function enabled

2.9. Restore to Default Setting

To reset the speaker to the original settings and remove all the previous pairing and connections, just press and hold both “V+” and “V-” buttons simultaneously for 10 seconds until the blue and red LED lights flash 5 times.

Contacts:
JSC „Ainera“
Tel: +370 37 209747
E-mail: pagalba@ainera.lt
www.ainera.lt