

# SUPERTOOTH

buddy

## *Bluetooth Handsfree Kit*



## A. Product Description

---

**SUPERTOOTH BUDDY** is a *Bluetooth®* handsfree kit that supports headset and handsfree profile phones. It is designed for easy handsfree operation with superior performance.


**Don't forget: Drive safely and within the law.**

Check if the national or local legislation in force in your country does not limit the use of mobile phones while driving. It is up to the user of this product to respect the said legislation in the area where he/she lives.

## B. Product Overview

---

1. Speaker
2. Volume Up
3. Volume Down
4. Bluetooth Indicator / Charge Indicator
5. Audio Enhancing Soft Microphone
6. MFB Button (answer/end/reject/voice dial/redial/audio transfer)
7. End/Reject Button
8. On/Off Button (on/off/pairing)
9. Magnet
10. Charger Port

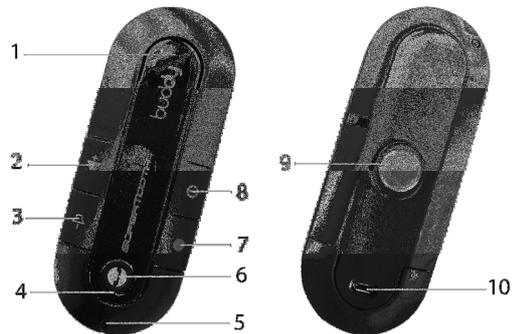

## C. Charging


---

1. Connect the charger's plug to the **Charger Port (10)** of the **SUPERTOOTH BUDDY**. Connect the charger to an external power source.

### Charge Indicator (4) Status:

- Steady Red: **Battery Low**
- Steady Orange: **Charging**
- Steady Green: **Battery Full**

2. When fully charged, disconnect the charger.

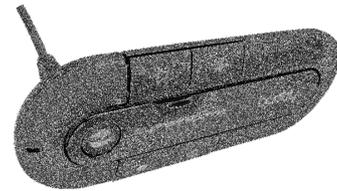

## D. Power On/Off

---

**Power On:** Press the **On/Off (8)** button for 1 second, the **Bluetooth Indicator (4)** turns blinking blue. A beep will be heard.

**Power Off:** Press and hold the **On/Off (8)** button for 3 seconds, until the **Bluetooth Indicator (4)** turns red. A beep will be heard.

## **E. Pairing to your Bluetooth Mobile Phone**

Pair the **SUPERTOOTH BUDDY** to your Bluetooth mobile phone to create the link or audio connection between the two. The pairing process is required only once for each phone.

### **Full Auto Pairing Procedure:**

**IMPORTANT:** Please check if your phone's Bluetooth is enabled and discoverable. Then place your phone and the handsfree kit close to each other.

1. From OFF, press and hold the **On/Off (8)** button of the handsfree kit until the **Bluetooth Indicator (4)** turns blinking red/blue. Then press the **MFB (6)** button to search your phone. *Note: The handsfree kit will search only for 1 minute. If your phone is not found, press the **MFB (6)** button again.*
2. When the handsfree kit finds the phone, accept any connection or pairing prompts on your phone. The handsfree kit is now paired and ready to use. *Note: Older phones will ask for the password/pin code. Enter 0000 and press **OK**. The handsfree kit is now paired and ready to use.*

### **Normal Pairing Procedure:**

1. From OFF, press and hold the **On/Off (8)** button until the **Bluetooth Indicator (4)** turns blinking red/blue. The handsfree kit is now in pairing mode.
2. While the handsfree kit is in pairing mode, access the Bluetooth menu of your phone. Turn on the Bluetooth function and execute a Bluetooth search. *(See your phone's manual.)*
3. When the phone displays the list of Bluetooth devices, select **ST BUDDY**.
4. If the phone asks for the password/pin code, enter 0000 and press **Ok**.
5. The handsfree kit is now ready to use.

## **F. Installation**

1. Fix the metal clip of the **SUPERTOOTH BUDDY** on the sun visor.



2. Attach the **magnetic (9)** back of the **SUPERTOOTH BUDDY** to the fixed metal clip. The **SUPERTOOTH BUDDY** must be placed in such way that its **microphone (5)** is directed to the mouth of the user.



## **G. Basic Operations**

---

### **IMPORTANT:**

The handsfree kit needs to be *'paired'* to your Bluetooth mobile phone, before you can use the following functions. See "**Pairing to your Bluetooth Mobile Phone** in Section E".

### **Make a Call (Normal Dial):**

Dial the number on your phone. Audio will automatically be heard through the handsfree kit. During an ongoing call, the **Bluetooth Indicator (4)** will turn steady blue.

*Note: With some phones, audio is always on the phone during an outgoing call. You will need to press the **MFB (6)** button for 1 second to transfer the audio to your handsfree kit.*

### **Answer a Call:**

To answer a call, simply press the **MFB (6)** button for 1 second, the **Bluetooth Indicator (4)** will turn steady blue.

### **End a Call:**

Press the **MFB (6)** button or the **End/Reject (7)** button for 1 second to end the call.

### **Voice Dial:**

**Note:** Before using this feature, make sure that the voice dialing function of your phone is activated. Some phones need to have at least one **voice tag** recorded in the phone's memory, not on the SIM card! (Kindly refer to your phone's manual.)

1. Press the **MFB (6)** button for 1 second.
2. A voice dial beep will be heard on the handsfree kit prompting you to say the voice tag of the contact to call and the **Bluetooth Indicator (4)** will turn steady blue.
3. Say the voice tag exactly as how you recorded it.

4. The voice tag will be played back to you and then the phone will dial the number automatically.

**Redial (For Handsfree Profile Phones only):**

Press the **MFB (6)** button for 3 seconds. The last dialed number will be redialed.

**Reject a Call (For Handsfree Profile Phones only):**

During the ring tone, press and hold the **MFB (6)** button for 3 seconds or short press the **End/Reject (7)** button. The incoming call will be rejected.

**Volume Setting:**

Increase or decrease the volume by pressing the **Volume Up (2)** or **Volume Down (3)** button. Press repeatedly until the desired level is reached. A beep will be heard as lowest and highest levels are reached.

**To transfer Audio from the Handsfree kit to the Phone:**

Simply turn off the handsfree kit by pressing the **On/Off (8)** button for 3 seconds and the audio will automatically be transferred to the phone.

**To Transfer Audio from the Phone to the Handsfree kit:**

Press the **MFB (6)** for 1 second and the audio will automatically be transferred to the handsfree kit.

*Note: For some phones, you may need to accept a connection prompt on the phone before automatic transfer takes place.*

## **H. Advanced Functions**

---

**a. Call waiting**

**Important:** Before using this feature, make sure that your phone and the phone network both support call waiting.

If there's a second incoming call, a beep will be heard from the **SUPERTOOTH BUDDY**.

**To end the current call and accept the second incoming call**

Short press the **MFB (6)** button will end the current call and accept the second call. The audio for the second call will automatically be heard through the handsfree kit.

*Note: Call waiting is not available if two phones are connected (MultiPoint).*

**b. Multi-Point Function**

The **SUPERTOOTH BUDDY** can simultaneously connect to 2 Bluetooth devices. The **SUPERTOOTH BUDDY** is active on both mobile phones. User

actions (voice dial, redial) will control the primary phone, but an incoming call on any of the two phones can be accepted or rejected from the **SUPERTOOTH BUDDY**.

**Multi-Point Activation:**

From pairing mode or standby mode, press and hold the **Volume Up (2)**.  
A beep will be heard on kit.

**Multi-Point Deactivation:**

From pairing mode or standby mode, press and hold the **Volume Down (3)**.  
A beep will be heard on kit.

**Multi-Point Pairing Procedure:**

1. Turn off the handsfree kit by pressing and holding the **On/Off (8)** button until the LED flashes red.
2. Pair the additional phone as explained in *“Pairing to your Bluetooth Mobile Phone on section E”*. This phone will now be the primary phone.
3. Connect the 1<sup>st</sup> phone paired manually or turn the kit Off then On to connect both phones automatically.

**Using Multi-Point:**

Refer to *“BASIC OPERATION on section G”*.

**Notes:**

- Voice dial and re-dial will be done using the primary phone only.
- You can accept or reject calls from any of the two phones.

When you already have an ongoing call on the 1<sup>st</sup> phone, if you receive a call on the 2<sup>nd</sup> phone, you will hear a special ringtone on the handsfree kit while the ongoing communication continues.

**To end the 1<sup>st</sup> phone call and accept the 2<sup>nd</sup> phone call:**

Short press the **MFB (6)** button will automatically end the 1<sup>st</sup> phone call and accept the 2<sup>nd</sup> phone call (audio will automatically be heard through the handsfree kit).

*Note: Call waiting is not available if two phones are connected (MultiPoint).*

**c. Switching Connections Between Paired Phones**

The **SUPERTOOTH BUDDY** always maintains a maximum of 8 phones in its memory. An additional pairing will automatically delete the phone that has not been used for the longest time. This phone needs to be paired again before it can be used.

You can easily switch to any of the paired phones by:

1. Disconnecting one of the 2 connected phones using the “Active devices” in the Bluetooth menu of that phone.
2. Connecting the handsfree kit to the desired phone by using the “Paired devices” in the Bluetooth menu of that phone.

*Note: Reconnection to a paired phone can also be done by pressing the **MFB (6)** button. However, the **SUPERTOOTH BUDDY** will attempt to connect to the last used phone only. Therefore, it is recommended to connect to another paired phone using the phone menu.*

## ***I. Special Features***

---

### **a. Automatic Reconnection:**

If the handsfree kit is left ON, it will automatically reconnect to your phone when you get back in your car.

*Note: This automatic reconnection can take few seconds after getting back in range.*

### **b. Reset Pairings**

During pairing mode, press and hold the **End/Reject (7)** button for 5 seconds. A beep will be heard on kit. Now all phones paired to handsfree kit are deleted.

### **c. Audio Enhancing Soft Microphone**

Specially designed to absorb noise and vibrations, this microphone will enhance the sound quality.

## **J. SUPERTOOTH BUDDY Specifications**

---

<b>Bluetooth Compliance:</b>	<i>Bluetooth version 2.1</i>
<b>Supported Bluetooth Profiles:</b>	<i>Supports headset and handsfree profiles</i>
<b>Operating Range:</b>	<i>Up to 10 meters</i>
<b>Frequency:</b>	<i>2.4 GHz</i>
<b>Talk Time:</b>	<i>Up to 20 hours</i>
<b>Stand-by time:</b>	<i>Up to 1000 hours (40 days)</i>
<b>Charging Time:</b>	<i>3 hours</i>
<b>Battery Type:</b>	<i>Rechargeable Lithium Ion</i>
<b>Special Features</b>	<ul style="list-style-type: none"><li>▪ <i>Full Duplex</i></li><li>▪ <i>Full DSP Echo Cancellation / Double Noise Canceller</i></li><li>▪ <i>Audio Enhancing Soft Microphone</i></li><li>▪ <i>Full Automatic Reconnection</i></li><li>▪ <i>Digital Volume Control</i></li><li>▪ <i>Call Waiting</i></li><li>▪ <i>Full Auto Pairing / Normal Pairing</i></li><li>▪ <i>Voice Recognition Dialing (If phone supports)</i></li><li>▪ <i>Last Call Redial</i></li><li>▪ <i>Reject Incoming Call</i></li><li>▪ <i>Dedicated power switch</i></li><li>▪ <i>Can also be charged from a PC via USB Cable</i></li><li>▪ <i>Compact Size</i></li></ul>
<b>Multipoint:</b>	<i>8 devices can be paired Maximum 2 phones monitored</i>
<b>Installation:</b>	<i>Quick magnet fixation on sun visor</i>
<b>Dimensions:</b>	<i>14.6 x 49 x 129mm</i>
<b>Weight:</b>	<i>64g</i>

## English

### Correct Disposal of This Product

(Waste Electrical & Electronic Equipment)



(Applicable in the European Union and other European countries with separate collection systems)

This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

**CE 0678**

## English

*This equipment is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.*

**CE info:** <http://www.supertooth.fr/download>

Euro Communication Equipements sas

D117 Route de Foix

F 11500 NEBIAS

The *Bluetooth®* word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Euro-CB is under license. Other trademarks and trade names are those of their respective owners.

## **Federal Communications Commission (FCC) Statement**

15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### **Operation is subject to the following two conditions:**

- 1) This device may not cause interference and
- 2) This device must accept any interference, including interference that may cause undesired operation of the device.

### **FCC RF Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.