



OPTI-6100 LMX Chassis

OPTI-6100 Multi-Service Provisioning Platform


Features and Benefits

- 19-inch or 23-inch rack-mountable
- Delivers up to 336 DS1 or 48 DS3 circuits or up to 96 10/100/1000 Ethernet circuits or various combinations of DS1, EC-1, DS3, OC3, OC12, and 10/100/1000 Ethernet services
- Dimensions: 12.25 inches (7U) H x 12 inches D x 17.5 inches W

Accommodates

- One System Controller Module (SCM2, P/N 1184500L2)
- Two OMM modules in high-speed (HS) slots
- Twenty-four tributary modules in Mid-Speed (MS) slots
- One DS3 Switch Module (DS3SM, P/N 1184567L1)
- One Fan Module (LFANM, P/N 1184564G1)
- 2mm Hard Metric connectors for 336 DS1 circuits
- BNC connectors for 48 DS3 or EC1 (STS-1) circuits
- Wire wrap: RS-485 bus, alarms, fans, and BITS clock
- RJ-45 front panel Ethernet management interface, in addition to rear panel RJ-45 for CO LAN maintenance access
- DB-25 X.25/ADMIN port interface
- RJ-45 or SFP connections to Ethernet tributary modules
- Fiber connections to OMM modules (LC connectors)
- Fiber connections to OC-3/12 tributary modules (LC connectors)
- Cooling via an integrated fan module

The OPTI-6100® LMX chassis is a compact 19-inch or 23-inch rack-mountable chassis for the OPTI-6100 Multi-service Provisioning Platform. The LMX chassis hosts optical multiplexer (OMM) modules to terminate OC-48 fiber circuits, and tributary modules to deliver DS3, EC1, DS1, OC-3, OC-12, or 10/100/1000 Ethernet services. A DS3 switch module is provided for enhanced DS3 protection. The OPTI-6100 LMX chassis utilizes current tributary modules common to the OPTI-6100 MX and SMX chassis.

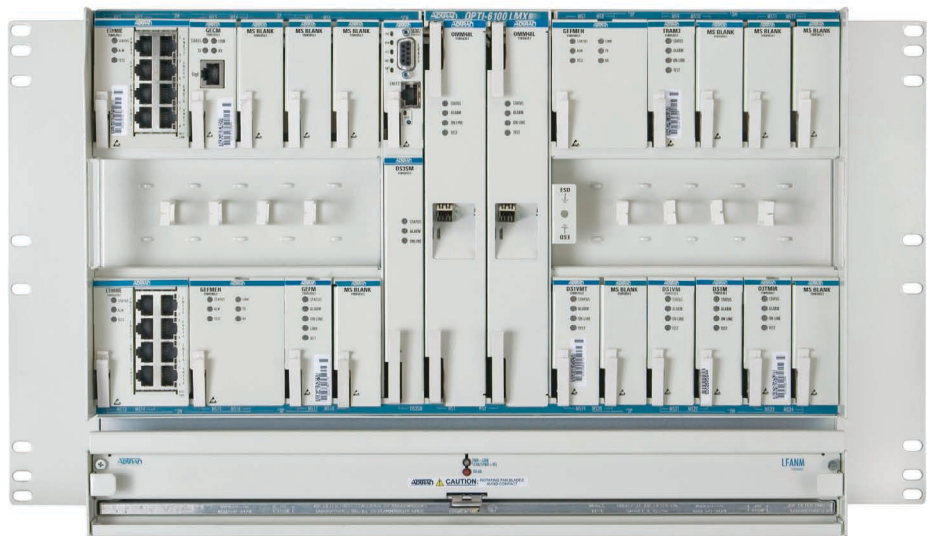

OPTI-6100 LMX Chassis (front view)

Smart Solutions for a
Connected World.





ADTRAN, Inc.
901 Explorer Boulevard
Huntsville, AL 35806

P.O. Box 140000
Huntsville, AL 35814-4000

256 963 8000 voice
256 963 8030 fax

General Information
800 9ADTRAN
info@adtran.com
www.adtran.com

**Pre-Sales
Technical Support**
888 5ADTRAN
support@adtran.com
www.adtran.com/support

Where to Buy
800 827 0807
www.adtran.com/where2buy

**Post-Sales
Technical Support**
800 726 8663
support@adtran.com
www.adtran.com/support

Regional Offices
Dallas, TX
972 830 9070
Denver, CO
303 471 9150
Kansas City, KS
800 471 8649
Newark, NJ
800 471 8656
Ontario, Canada
416 290 0585
Quebec, Canada
877 923 8726
San Antonio, TX
888 223 7671

International Inquiries
+1 256 963 8716 voice
+1 256 963 6300 fax
international@adtran.com
www.adtran.com/international




ADTRAN is an ISO 9001, ISO 14001
and a TL 9000 certified supplier.

61184555L1-8A July 2008
Copyright © 2008 ADTRAN, Inc.
All rights reserved.

OPTI-6100 LMX Chassis

OPTI-6100® Multi-Service Provisioning Platform

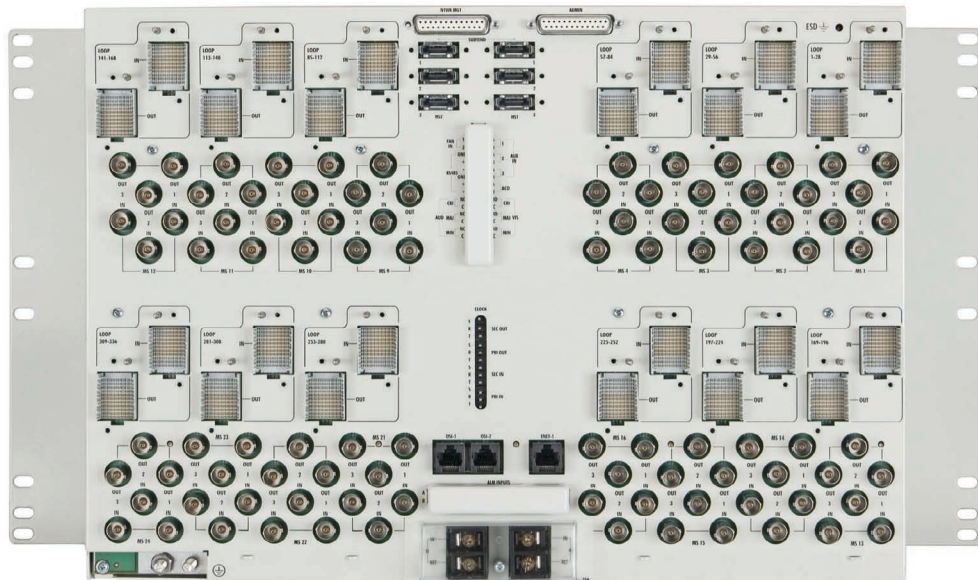

OPTI-6100 LMX Chassis (rear view)

Product Specifications

Operates from A, B, or A and B Input Voltage Power Feeds

- **Voltage Range:** -42 VDC to -60 VDC
 - -48 VDC, nominal
 - **Fusing Requirement:** 35 amp fuse, maximum

Note: Certain configurations may allow for lower fuse ratings.

Extended Environmental Support

- **Operational Temperature Range:** -40°C to +65°C
- **Storage Temperature Range:** -40°C to +85°C
- Relative humidity to 95%, noncondensing

Ordering Information

Equipment	Part #
OPTI-6100 Shelf	
LMX Chassis	1184555L1
Controller	
SCM2	1184500L2
OPTI-6100 High Speed Modules	
OC-48L OMM ADM/UPSR/Terminal, SFP, No optics	1184563L1
OPTI-6100 Mid Speed Modules	
DS3SW DS3 Switch Module	1184567L1

Additional modules as per site requirements

Equipment	Part #
Misc. Hardware	
LFANM Assembly and Filter	1184564G1
Cables	
CBL,ASY 8X11 2MM/CHAMP, RX 6FT OPTI-6100 LMX	1196CP101L7
CBL,ASY 8X11 2MM/CHAMP, TX 6FT OPTI-6100 LMX	1196CP101L8
CBL,ASY 8X11 2MM/STUB, RX 25FT OPTI-6100 LMX	1196CP101G9
CBL,ASY 8X11 2MM/STUB, TX 25FT OPTI-6100 LMX	1196CP101G10
CBL,ASY 8X11 2MM/STUB, RX 50FT OPTI-6100 LMX	1196CP101G11
CBL,ASY 8X11 2MM/STUB, TX 50FT OPTI-6100 LMX	1196CP101G12
CBL,ASY 8X11 2MM/STUB, RX 100FT OPTI-6100 LMX	1196CP101G13
CBL,ASY 8X11 2MM/STUB, TX 100FT OPTI-6100 LMX	1196CP101G14
CBL,ASY 8X11 2MM/STUB, RX 150FT OPTI-6100 LMX	1196CP101G15
CBL,ASY 8X11 2MM/STUB, TX 150FT OPTI-6100 LMX	1196CP101G16
SFPs	
SFP-OC48 SR	1184560P6
SFP-OC48-IR	1184560P2
SFP-OC48-LR2 1550	1184560P5
SFP-OC48-LR	1184560P1

Specifications subject to change without notice. ADTRAN and OPTI-6100 are registered trademarks of ADTRAN, Inc. All registered trademarks and trademarks mentioned in this publication are the property of their respective owners.