


User manual for C50



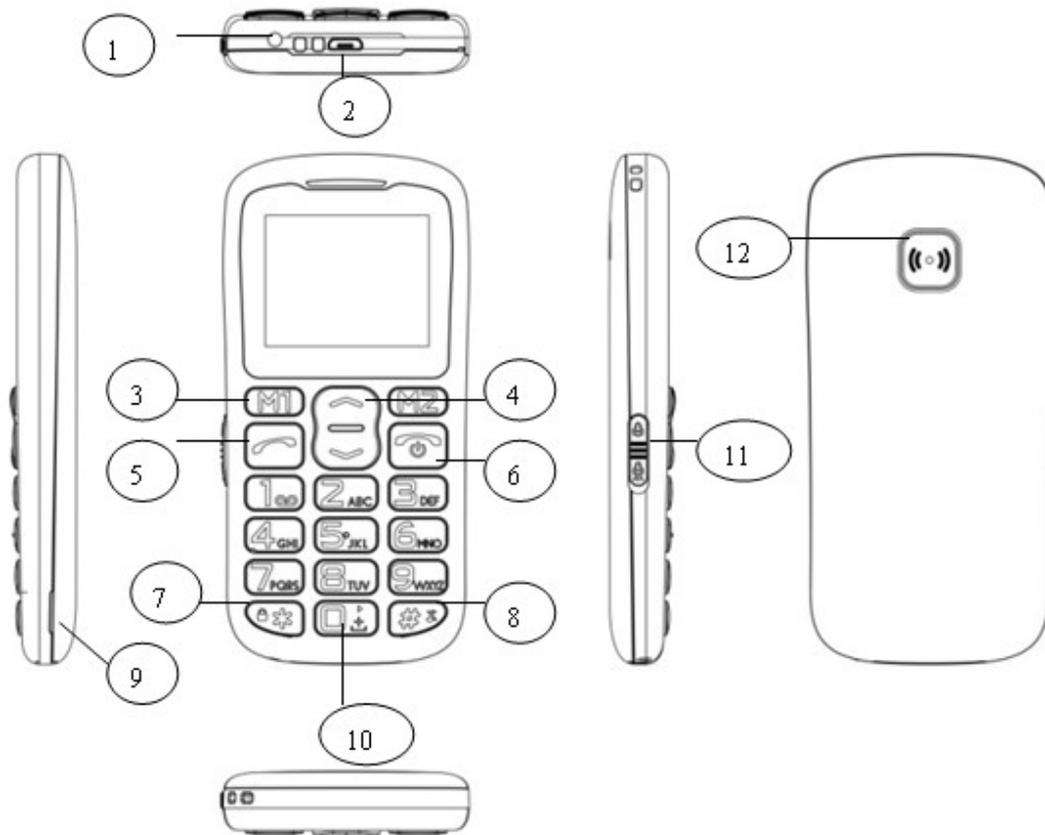

Instructions

| | |
|-----------------------------------------------------------------------------------------------------------------------------|------------|
| 1. LED light | 2.USB port |
| 3. M1 button,in standby mode,press this button enter into main menu. In standby mode,press M2 enter into phonebook. | |
| 4.Up/down arrow keys | |
| 5.Call button | |
| 6.End call /power on/power off | |
| 7.* key, in standby mode, long press this key to lock/unlock the keypad, when edit message, press this key to input symbol. | |
| 8.# key,long press it change to Silent mode / change input method. | |
| 9.Snap joint,please open the battery cover here. | |
| 10.O key, play music | |
| 11.Torch key | |
| 12.SOS button | |

Contents

| | |
|--------------------------------------------------|-----------|
| Installation | 1 |
| Installing the SIM Card and battery | 1 |
| Phonebook | 1 |
| Add new contact | 1 |
| Make a call | 1 |
| Make a call from phonebook..... | 1 |
| Message | 2 |
| Writing and sending SMS..... | 2 |
| Inbox..... | 2 |
| Outbox..... | 3 |
| Drafts..... | 3 |
| Sent messages..... | 3 |
| SMS templates..... | 3 |
| Call history | 3 |
| FM radio | 4 |
| Tools | 4 |
| Alarm..... | 4 |
| Calendar..... | 4 |
| Calculator..... | 5 |
| Bluetooth..... | 5 |
| File manager..... | 6 |
| Settings | 6 |
| SOS setting..... | 6 |
| Make a SOS call..... | 6 |
| Phone settings..... | 7 |
| Setup Time and date..... | 7 |
| Setup Language..... | 7 |
| Setup input method..... | 7 |
| Change the wallpaper..... | 8 |
| Profiles..... | 8 |
| Call settings..... | 9 |
| Speed dial..... | 9 |
| Block function..... | 10 |
| Set shortcut keys..... | 10 |
| Security settings..... | 11 |
| Restore factory settings..... | 11 |
| Safety and Attentions | 11 |

Installation

Installing the SIM Card and battery

1. Remove the battery cover.
2. Insert the T-Flash card by carefully sliding into the holder.
3. Insert the SIM card by carefully sliding into the holder. Make sure the SIM card's contacts are facing inwards.
4. Insert the battery by sliding it into the battery compartment.
5. Replace the battery cover.

Operation

Phonebook

Add new contact



1. Press **Menu** enter into  and press **OK**.
2. Select **Add new contact** and press **OK** .
3. Press **Select** to choose **To phone** or **To SIM**.
4. Input Name and number. To change the input method, please press .
5. Press **Options** to **Save** or **Cancel** the contact.
6. Press  return to standby.

Note: Long press  for the international prefix +
Always add + before the country code for making international call .

Make a call

1. In standby mode, input phone number including the area code, delete with **Clear**.
2. Press  to dial and press **Abort** to cancel calling.

Make a call from phonebook

1. In standby mode, press  (Names) to open the phonebook.

2. Use  scroll to view the contacts or quick search by pressing the first letter of the name.
3. Press  to call the selected contacts.

Message

Writing and sending SMS

1. Press **Menu** enter into  and press **OK**.
2. Select **Write message** and press **OK**.
3. Input message .
press  to select symbol, press  to change input method.
4. Press **Options** to send message .

Inbox

1. Press **Menu** enter into  and press **OK** .
2. Select **Inbox** and press **OK**.
3. Select a message from the list and press **Options** to view the message.

Others options as below:

Reply

Input your message and send to the sender.

Call sender

Press Select to call sender.

Forward

Press Select to forward message to other contacts

Delete

Press Select to delete the message.

Delete all

Delete all received messages.

Save to phonebook

Here you can save the sender's phone number.

Outbox



1. Press **Menu** enter into  and press **OK** .
2. Select Outbox and press **OK** .
3. Select a message from the list and press Options to View/Resend/Edit/Delete/Delete all message.

Drafts

Here you can see the messages which you saved.

Sent messages

Here you can check all messages you sent out.

SMS Templates

Here you can use them when you input a message ,they can save you a lot of time .

Call history

All received, missed, outgoing calls are saved in call history.

View call history



1. Press **Menu** enter into  and press **OK**.
2. Here you can check call logs as below:
 - Missed calls
 - Dialled calls
 - Received calls
 - Delete call logs

FM radio



1. Press Menu enter into , press OK to entry FM radio.
2. Press Options to view Channel list.
3. Select Manual input can input the channel you prefer.
4. Select Auto search can auto search your local radio channel.
5. Enter into settings to set up background play.

Tools

Alarm



1. Press Menu enter into , select **Alarm** and press **OK**.
2. Press Edit to select status on/off. Press  &  to change the status on/off .
3. Enter the time directly by keypad.
4. Scroll to select repeat times and Alert type.
5. Press **Save** to activate the alarm, cancel it by press **Back** .
6. To Edit the alarm ,press Edit, to stop it, press Off.

Calendar



1. Press Menu enter into , press OK to select **Calendar**.
Today's day and date is shown on the display.
2. Press **Options** to do following settings:
 - View**
Show the event for the selected date.

View all

View all events

Add event

- A. Input subject for the event .
- B. Enter a start date and time for the event .
- C. Enter the end date and time for the event.
- D. Enter subject for the event.
- E. Activate Alarm and repeat times for the event .
- F. Enter location for the event .
- G. Save the event.

Delete event

Delete the selected event.

Jump to date

Enter the date and press OK.

Go to weekly view

Shown this week date

Calculator



1. Press Menu enter into , press **OK** to select **Calculator**.

2. Enter the first number and use  to enter into decimal point.

3. Use  to select (+ - * ÷) and press **OK**.

Enter the next number and press OK. The result is shown on the screen.

Bluetooth



1. Press Menu enter into , press **OK** to select Bluetooth.

2. Power on/off : Select on/off to enable/disable bluetooth.

3. **Visibility**: Select on/off to make the phone visible /invisible to other devices .

4. **My device**: Saved device name and allow you to add new devices.

5. **Search audio device**: Search for the available audio device .


6. **My name**: Name for current device .

File manager

Here you can View all your files in Memory card and in the phone ,also you can Format your Memory card.

Settings

SOS setting



1. Press Menu enter into .

2. Select **SOS settings** and press **OK**.

3. Scroll to **Status** and setup SOS status on/off.

4. Scroll to **family Numbers** to setup SOS number, here you can setup 5 numbers.

5. Scroll to **SOS SMS on/off** to choose send SOS SMS or not.

6. Enter into SOS sms to edit message.

7. Enter into warning tone to control the tone status on or off.

Make a SOS call

Before you make SOS call, please assure SOS status

is ON and you already finished SOS settings.

Long press SOS button, the phone will automatically send SOS messages to the five SOS numbers and then call to the five SOS numbers one by one ,siren sound is always on until the call be answered.

Phone settings



- 1.Press menu scroll to .
- 2.Select **Phone settings** and press **OK**.

Then you can setup as below:

Setup Time and date

- 1.Select **Set home city** and choose your local city.
- 2.Select **Set time and date** and press **OK**.
Enter Time and date and press **Save**.
- 3.Select **Set format** and press **OK**.
Choose the Format that you like and then **Save**.

Setup Language

- 1.Select Language and press OK.
- 2.Use  scroll to select the **Language** from the list and press **OK**.


Setup input method


- 1.Select **Pref.input method** and press **OK**.
- Use  scroll to select a input method form the list and press **OK** .

Change the wallpaper

1. Select Display, enter into wallpaper.
2. Here you can select wallpaper form the phone and memory card.

Profiles



1. Press **Menu** scroll to .
2. Select **User profiles** and press **OK**. Then you will see four mode as below:
 - General
 - Silent
 - Meeting
 - Outdoor

Customize General mode

Here you can choose your preferred Power on/off ringtones, incoming call ringtones etc.



1. Press **Menu** scroll to .
2. Select **User profiles** and press **OK**. Select **General** and press Option.
3. Select **Customize** and press Select .
4. Scroll to **Alert type** and press **Options** to select Ring only, Vib. Only, Vib. and ring or Vib. then ring. Press **OK** to save.
5. Scroll to **Ringtone** and press **Options** to select preferred ringtone.

6. Scroll to **Ringtone volume** and press **Option**,



Use to adjust volume, press OK to save.

7. Scroll to Message and press Option to select a preferred ringtone for message.


8. Scroll to Message volume and press



Option, use to adjust volume, press OK to save.

The same way to setup other mode.

Call settings



1. Press **Menu** enter into and press **OK** .

2. Select **Call settings** and press **OK**.

3. Here you can Activate or deactivate the functions below:

Call waiting

Call divert

Call barring

4. Advanced settings, here you can setup functions below:

Auto redial

Press **OK** to select the status **On/Off**.

Call time reminder

Press **OK** to select **Off/Single/Periodic**.

Answer mode

Press **OK** to select Any key answer or Auto answer when headset mode.

Speed dial

M1, M2 and the numerical keys 2-9 can be used for speeding .

Add speed dial number and Activate the status
Add M1,M2 speed dial numbers:



1. Press **Menu** scroll to
2. Select **Speed dial** and press **OK**.
3. Enter into **M1/M2 key** to activate the status.
4. Select **Set numbers** to choose numbers for M1 and M2 keys from phonebook.

The same with to add contacts for the numerical keys 2-9 .

Block function

You can disable functions to simply use of the phone.



1. Press **Menu** scroll to and press **OK**.
 2. Select **Block Function** and press **OK**.
- Scroll to choose each function you want to disable and press **Done**.

Set shortcut keys

Here you can set shortcuts for up key and down key.



1. Press **Menu** scroll to .
2. Select Key Shortcuts and press Ok.
3. Choose Up key to determine relevant functions you like, the same way to set shortcuts for down key.

Security settings

Here you can do security settings for SIM card, phone and keypad.



1. Press **Menu** to .
2. Scroll to security settings and press OK. Then you can see sub-menus below:
 - A. SIM security
Here you can setup PIN lock status on or off.
Change PIN code
 - B. Phone security
Here you can setup Phone lock status on/off.
Change password
 - C. Screen auto lock
Press OK to on/off auto lock.

Restore factory settings

Press OK and input password(1234) to reset your phone to the default.

Safety and Attentions

In order to use your mobile phone safely and efficiently, please read your messages before using:

1. Please be careful when you are near chemical plant, gas station, tank farm and other exploders. Even if your mobile phone is in standby, it will send out RF signal as well. Therefore, please power off your mobile phone.

2. When you are driving, do not use your mobile phone. If you have to use it, please park your car then have your calling.

3. Don't use your mobile phone in the hospital so as not to disturb the operation of medical equipment, such as heart pacemakers, hearing aids and etc. You should obey relevant rules before using.

4. Please power off your mobile phone before the plane taking off so as not to disturb flying. It is dangerous and illegal to use mobile phone on board.

5. Please place your mobile phone and all accessories where is untouchable for kids.

6. Accessories and battery: please use the dedicated accessory and battery of our company. If not, it will destroy the phone and lead to danger. Please do not shortcut, tear down and adapt the battery. If the phone has excessive temperature, discolor, variant, bulking, weeping and other unusual phenomenon, please stop using and change the battery immediately so as not to

affect the safety. Please place the old batteries in specific recycle spots.

7.No charging without the battery. When you take off the battery, please power off the mobile phone so as not to destroy the property of the phone.

8.The phone is not waterproof. Please keep it dry.

9.Avoid using the phone in an excessive and too low temperature.

10.Not throw, fall and beat the phone so as not to destroy the internal and external phone.

11.Authorized Service: install and maintain the phone by professional people. Please not tear off the phone on your own.

12.The counting unit of radiation standard is called SAR. In the international norm, the SAR limitation is 2.0 W/Kg. The maximal SAR of this phone is 0.482 W/Kg. It meets the state criterion of GB 21288-2007.