


SMB301 is a multi-functional combination which combines the AC charger, Car charger and Power bank all in one, ensure your electronic devices are always power equipped whenever and wherever.

## Function Introduction

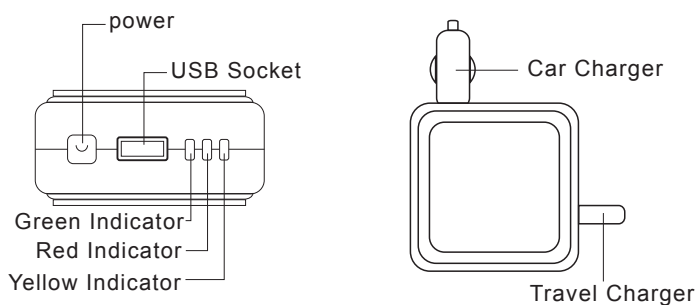

## Specification

Capacity:	2000mAH
Input Voltage:	AC 90-240V
	DC 12V
Output Voltage:	DC 5V
Output Current:	600-1000mA(Max.)
Static Power-off Current:	<10uA
Operating Temperature:	--20°C ~ +80°C

## Operating Instructions

### A, AC charger operation

- 1, Plug the AC charger into the wall socket if you are home.
- 2, The red LED turns on and it turns off automatically once the power bank is full charged.
- 3, If a mobile phone or electronic device connected to the power bank, the mobile phone or electronic device will be automatically charged while the power bank is charged during this charging period, and the red LED turns off immediately once the battery inside full, no matter the mobile phone or electronic device is fully charged or not.

### B Car charger

- 1, Plug the car charger into the cigarette socket if you are in a car.
- 2, The Yellow LED turns on and it turns off automatically once the power bank is full charged.
- 3, If a mobile phone or electronic device connected to the power bank, the mobile phone or electronic device will be automatically charged while the power bank is charged during this charging period, and the Yellow LED turns off immediately once the battery inside full, no matter the mobile phone or electronic device is fully charged or not.

### C USB charger

- 1, Connect your mobile phone or electronic device via the USB cable.
- 2, Press the switch once and the Green LED turns on.
- 3, Once your mobile phone or electronic device is fully charged the Green LED turns off automatically.
- 4, The USB charger will stop working if AC charger or Car charger is used.