

Copyright @2009 by this company. No. Part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language or computer language, in any form or any means whether Electronic, mechanical, magnetic, optical, chemical, manual or otherwise without the prior written permission of this company.

SAFETY INSTRUCTION

1. Never push objects of any kind, or spill liquid of any kind into these products.
2. Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage points or other risk. Refer all servicing to qualified service personnel, if any misuse mentioned above happened or any accident dropping, miss-operations occurred.

7. Security notes

The unit is only suitable for indoor use. The heat being generated in the unit has to be removed via air circulation. Therefore the circulation vents at the housings must not be covered with any objects.. Do not insert or drop anything into the air vents as this could result in a short-circuit. If the unit is used for purposes other than originally intended, if it is connected in the wrong way or not repaired by authorized skilled personnel, there is no liability for possible damage. To cleaning only use a dry, soft cloth, by no means chemicals or water. .If the unit is to be put out of operation definitively, bring it to a local recycling plant for disposal.

8. Technical Data

LCD technology: TFT active matrix

Display size: Diagonally measured 7.0 inch

Color system: NTSC and PAL Dual System

Sync. :horizontal. 15625 Hz, vertical. 50 Hz.

Number of pixels: 800 (W) x RGB x 480 (H)

Dimension: 231.0x 164.0 x 91.86 (mm)

Audio level: 1V/10k Power supply: 12 -,24V, 340mA

Weight: 2500 g

5. Operation

- 1) Switch on the device with the Main power switch (6)
- 2) Select the right Video input (5)
- 3) Adjust the Brightness control \square \square in order to obtain an image as clear and sharp as possible.
- 4) Adjust the Volume for the headphones to desired level with the volume control (Optional)
- 5) You may push the reverse image function button (4) if the monitor is connected to a Rear View Camera.
- 6) Please push OSD Control Menu (1) bottom to select the Brightness, Contrast, and Display Mode that you wish to change, then use \square \square to get desired picture.

CAUTION: When using headphones do not adjust a high vol.

Permanent high volumes may damage person's hearing! The human ear gets accustomed to high volumes, which do not seem to be that high after some time. Therefore, do not further increase a high volume after getting used to it.

6. Application range

The LCD color monitors offer a sharp and high contrast display. They can be universally applied, e.g. in surveillance systems, in reverse monitoring car systems or for multimedia applications. Moreover, an additional Audio input enables sound transmission via headphone

1. Contents :

- | | |
|-------------------------------------|---------------------|
| 7.0" Monitor x 1 | Power supply x 1 pc |
| Sun Shield x 1 | Bracket x 1 pc |
| Screws for Sun Shield M3x 6 x 2 pcs | |
| Plastics Bolts x 2 pcs | |
| Washer A Ø17mm T=3 x 2 pcs | |

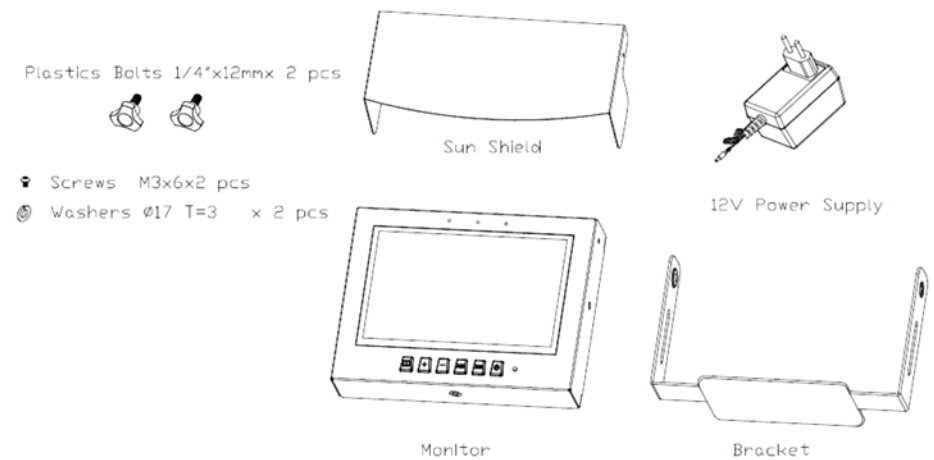


Fig. 1. Accessories

2. Installation

Sun Shield :

To attach the Sun Shield onto the metal housing of Monitor, use two M3x 6 screws to fasten it.

Bracket :

Use the Plastics Bolts to fasten the Bracket. Please put the washers in A, B, C. order on both side to bracket into the Holes on the side of Monitor See attached drawing.

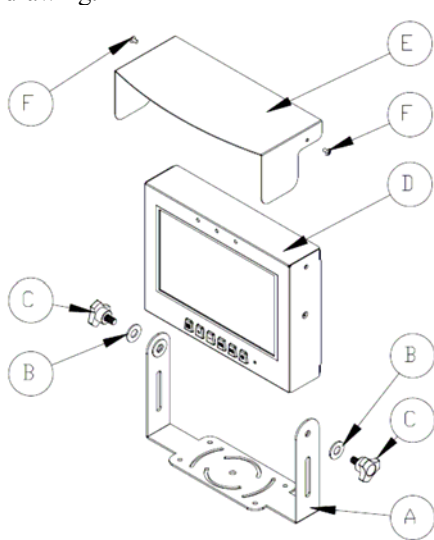


Fig. 2 Bracket Installation

The model in a metal case is suitable for mounting into furniture, walls , etc. Insert four screws into the mounting holes at the front panel and mount the device to desired location.

3. Connection

- 1) Connect the Video source to Video input I or II (8or 9)
- 2) Connect the Audio input (11) (Optional)
- 3) Selector the correct video Input (5) (Source)
- 4) Connect an electronically regulated 12V power supply (13) (Central positive)

- 5) Connect the Audio Out Put (12)
- 6) Connect the SDI Input (14) to your SDI signal source
- 7) Connect the SDI Output (15) or (16) to another Display you wish to use.
- 8) Connect the TALLY (17) to your center control equipment.

4. Connections And Operating elements

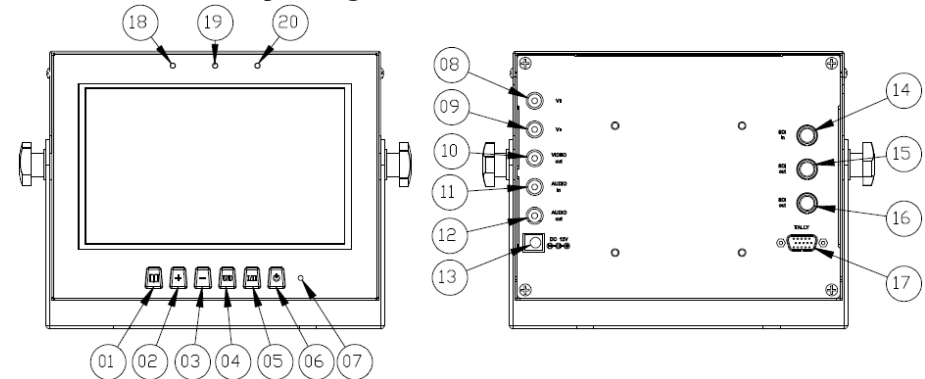


Fig. 3 Connectors and Controls

- | | |
|-------------------------------------|--------------------------------------|
| 1 OSD Menu | 2 Increase (default to Brightness) |
| 3 Decrease (default to Brightness) | 4 Left-Right-Up-Down Reverse |
| 5 Video Input selector | 6 Main Power |
| 7 LED Power Indicator | 8 Video I Input |
| 9 Video II Input | 10 Video Out-Put |
| 11 Audio Input | 12 Audio Out-Put |
| 13 DC 12V Power Input | 14 SDI Input |
| 15 SDI Output | 16 SDI Output |
| 17 TALLY Connector | 18 Green LED (on) |
| | 19 Red LED (Off) |
| | 20 Yellow (Stand by) |



Model No. LSD – 7725

7” SDI LCD Monitor

User’s Manual

Version 1.2