


## Connecting the VR-1 from the Audio Outputs of Your TV

VR-1

1. Use a set of red and white audio connection cables to connect the audio output of your TV to the INPUT of the VR-1.
2. Use another set of red and white connection cables (not included) to connect the OUTPUT of the VR-1 to the input of your stereo or home theater receiver.
3. Connect the A/C adapter to the DC input of the VR-1.
4. Plug the A/C adapter into a working electrical outlet.

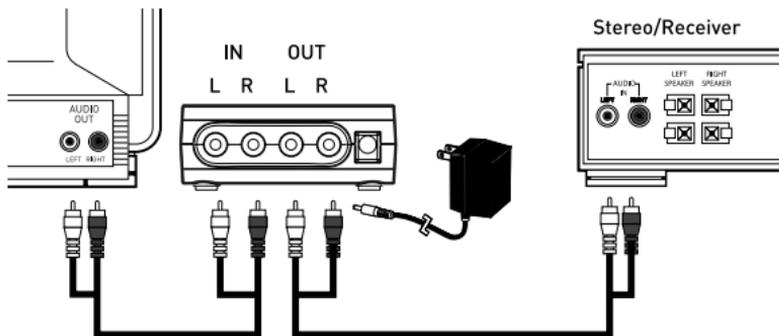

Note: You may need to enable the audio output feature of your TV. Please check the owner's manual of your system to determine how to do this.

4

# Limited Warranty

---

Audiovox Corporation (Audiovox) warrants this product against defects in materials or workmanship for one (1) year from the date of purchase. During this period, this product will be replaced without charge. This warranty does not cover any damage due to acts of nature, commercial use, accident, misuse, abuse or negligence. This warranty is only valid in the USA. Replacement as provided under this warranty is the exclusive remedy of the consumer. Audiovox shall not be liable for any incidental or consequential damages for breach of any express or implied warranty on this product, except to the extent that limitations of this sort are prohibited by applicable law. THERE ARE NO IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURCHASE EXCEPT TO THE EXTENT THAT IMPLIED WARRANTIES OR EITHER SORT ARE REQUIRED BY APPLICABLE LAW, AND IN SUCH CASE, EACH WARRANTY IS LIMITED IN DURATION TO THE ONE YEAR.


**For customer service and  
technical information::1.800.290.6650**



For Customer Service  
Visit Our Website At  
**[www.audiovox.com](http://www.audiovox.com)**  
Product Information, Photos,  
FAQ's, Owner's Manuals

# VR-1

Owner's Manual




**VR-1**

TV Volume Controller



**AUDIOVOX®**  
ELECTRONICS CORP.



## About Your TV Volume Regulator


VR-1

The VR-1 provides effective volume matching for television audio, DVDs, movies and more. With the VR-1, you will enjoy consistent audio levels when surfing from channel-to-channel, program-to-commercial, or between loud and noisy scenes of a movie.

**WARNING - DO NOT CONNECT THE OUTPUT OF ANY AMPLIFIER TO THE INPUT OF THE TV VOLUME REGULATOR. PERMANENT DAMAGE WILL OCCUR.**

The VR-1 can handle up to 4.6 volts Peak-to-Peak on the input.


1



## Connecting Your VR-1; Basic Setup

VR-1

1. Use a set of red and white audio connection cables to connect the output of your source device (such as a cable box, satellite receiver, DVD player, VCR, etc.) to the INPUT of the VR-1.
2. Use another set of red and white connection cables (not included) to connect the OUTPUT of the VR-1 to the input of your TV or another signal control device (such as a stereo, home theater receiver, powered speakers, etc.).
3. Connect the A/C adapter to the DC input of the VR-1.
4. Plug the A/C adapter into a working electrical outlet.

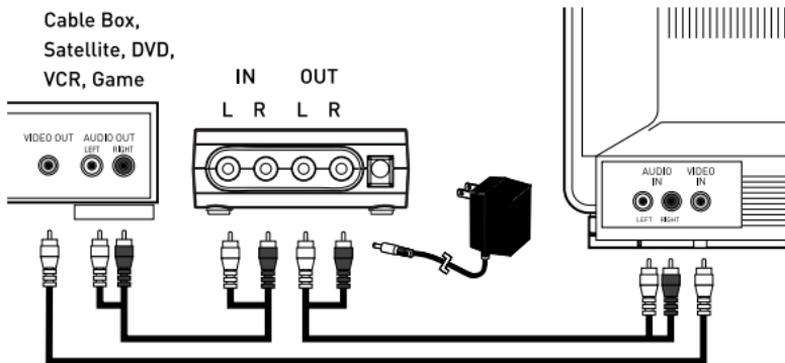


Note: When using RCA cables as shown above make sure that you remove the coax cable from your TV.

2

## Connecting the VR-1; Tape Monitor Setup

VR-1

1. Use a set of red and white audio connection cables to connect the Tape Out of your stereo or home theater receiver to the INPUT of the VR-1.
2. Use another set of red and white connection cables (not included) to connect the OUTPUT of the VR-1 to the Tape Monitor input of your stereo or home theater receiver.
3. Connect the A/C adapter to the DC input of the VR-1.
4. Plug the A/C adapter into a working electrical outlet.

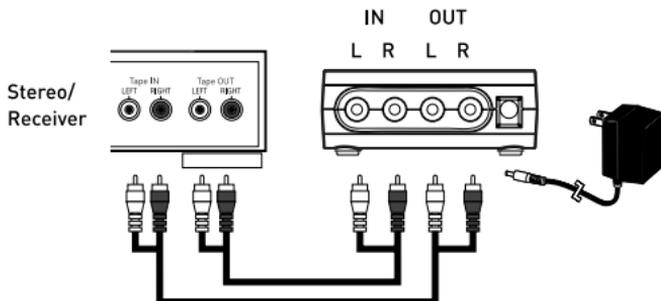

Note: You may need to enable the Tape Monitor feature on your stereo or home theater receiver. Please check the owner's manual of your system to determine how to do this.

3