

Bluetooth Keyboard with Built-In Multi-Touch Touchpad

蓝牙键盘+多点触摸板

Model (型号): KP-810-25BTT

www.iPazzPort.com

使用 说明

Contents 目录

English Portion

Introduction

Package

Feature

Specifications

System Requirement

Starting up

Pairing and establishing connection with computer

Windows xp/2000

Windows 7

Connect to iPad/iPhone

Connect to other smart mobile with Android OS

Touchpad mode

Function description of keyboard

Binds keys description

WEEE Directive & Product Disposal

Notice to customers

Caution

Compliance statement

中文部分

应用

包装清单

特点

规格

支持系统

开机

连接电脑

Windows xp/2000

Windows 7

连接 iPad/iPhone

连接安卓系统的产品

触摸板模式

键盘功能描述

组合键

Introduction

iPazzPort slim is a bluetooth keyboard with built-in, Multiple touchpad . You can type touch and swipe comfortably in 8m away from computer or big HD screen.

Package:

Buletooth Keyboard with Built-In Multi-Touch Touchpad	1
User manual	1

Feature:

- Sleek, low-profile keys: Easy and comfortable typing on quiet keys with bold, easy-to-read characters
- Touch panel switch to digital mode or mouse touchpad mode
- Ultra-sensitive mouse touchpad
- Built-in multi-touch touchpad: Large touchpad with multi-touch navigation for easier web browsing
- Supports multi language

Specifications:

- Long-range bluetooth: Control your TV-connected laptop from the couch with 33 feet/10 meter wireless range
- Power Supply:DC 3V(1.5V 3A battery x 2)
- Size:262x84x34mm
- Weight:170g

System Requirement:

- Windows
- iOS
- Android

Note:Pressing Fn+ios/Android/Windows, you can switch to the corresponding key layout system.

Starting up:

- 1.Remove battery cover to install battery.



2. Turn on the keyboard by switching power button to on.



Pairing and establishing connection with computer:

Windows XP/2000

1. Let's take Microsoft Bluetooth Software as an example to describe Bluetooth Search, Pairing and Connection, other Bluetooth software please refer to its own user manual. Insert Bluetooth adaptor into any vacant USB port on your computer, please be patient to wait system search and install new hard driver. Then bluetooth icon will appear on the taskbar. If your computing device has integrated bluetooth receiver refer to the user manual to enable that receiver.



2. Turn on unit by moving the power switch to ON, press key "Esc+K" reset it (about 5 seconds), that means your unit is ready and searching other Bluetooth device for pairing.



Note: during operation, do not press this key, or your bluetooth keyboard will be disconnected from your computer

3. Click "Start", "Control Panel" (make sure you're in the Classic View), and then double-click Bluetooth Devices. Select "Add".
4. In the "Add Bluetooth Device Wizard", select the "My device is set up and ready to be found" check box, and then click "Next".
5. After icon of "Bluetooth keyboard" appears, click "Bluetooth keyboard", and then click "Next".



Bluetooth keyboard
New Device


6. When the wizard asks you which passkey you want to use, click "Choose a passkey for me". Then click "Next".
7. After screen prompted us to enter your passkey, please type the passkey with keys on Mini Bluetooth Keyboard, and then press Enter. You also can choose no passkey to go next step. PLEASE DO REMEMBER TO USE THE KEY OF MINI BLUETOOTH KEYBOARD WHEN INPUT PASSKEY
8. In the final page of the wizard, click Finish, it maybe take a few seconds for new hardware driver installation before click finish. So please be patient. Your Mini Bluetooth Keyboard should now be successfully paired with your PC and ready to use.

Windows 7


Plug bluetooth receiver into any vacant USB port on your computer, please be patient to wait the system recognize your device, it maybe take several minutes. When new hardware has finished driver installation, an icon will appear in the task bar.

Right click icon of bluetooth, select "Add a Device"






An window like below will popup indicating that system is searching a devie to add...

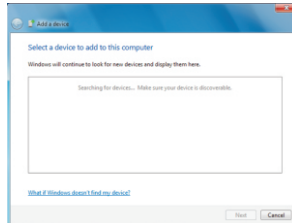

Turn on unit by moving the power switch to ON, press key “Esc+K” reset it (about 5 seconds). Bluetooth iPazzPort and Bluetooth Keyboard will appear in the window. Select it and click “Next”



Then you are requested to input a pass code for your device, please do type the code with Mini bluetooth keyboard, then press Enter

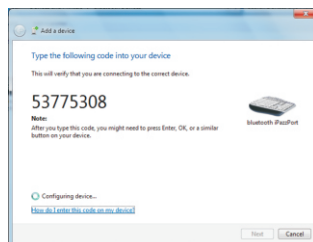


NOTE:1.Do not tap key “Bluetooth Reset” or you will be disconnect its connection during operation.

2.keyboard functions will not work until a bluetooth connection with the computing device is completed.

Connect to iPad/iPhone

- 1.Turn your Bluetooth Keyboard on by switch button to on, press Bluetooth Reset key (about 5 s).
- 2.Turn on your iPhone , tap “settings” => “Bluetooth”, then your iPhone will search the other Bluetooth for pairing, “Bluetooth keyboard” will be listed when system find your Bluetooth keyboard.
- 3.Tap “Bluetooth keyboard”, then system will install driver and prompt you to input pass code,you must type the pass code with your Bluetooth keyboard.
4. When it is connected to your iPhone,Bluetooth iPazzPort will appear in the list.
5. For re-connect to your iPhone: turn your Bluetooth keyboard on, then go to “Bluetooth” device list, and tap“ Bluetooth keyboard”, then connection will be built again.

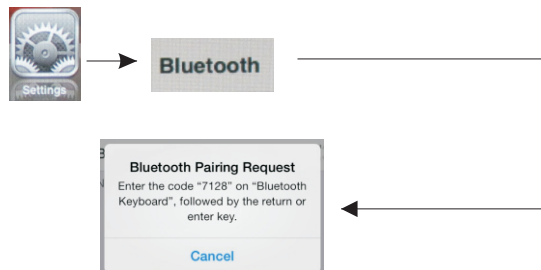

Connect to other smart mobile with Android OS


1. Activate bluetooth device of your mobile and make sure it is searchable and be able to pair.
 2. Tap search menu to make it in searching state.
 3. Turn your Bluetooth Keyboard on by switch button to ON, press Bluetooth Reset key (about 5 s).
 4. Icon of **Bluetooth iPazzPort** will appear in the list when bluetooth keyboard is found, tap this icon for pairing
 5. Tap “Bluetooth keyboard”, then system will install driver and prompt you to input pass code you must type the pass code with your Bluetooth keyboard.
- Please be noted that your mobile can't be connected and can't be used if your mobile have no HID profile or contact our service dept.
 - Please be noted if the android device requests to type in its codes on keyboard, please follow and disregard above instructions




1.Click “Settings”




2.Click “Bluetooth”

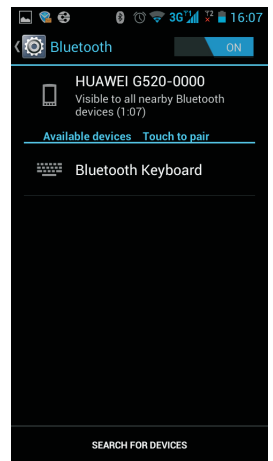

3.Turn on“Bluetooth”,
Search for devices

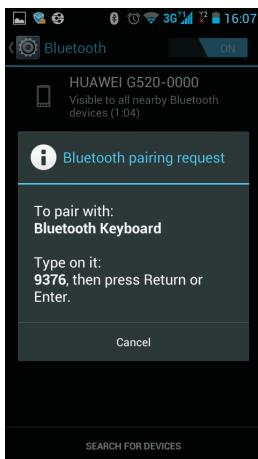


4.Enter Keyboard “9376”,
Press “Enter”

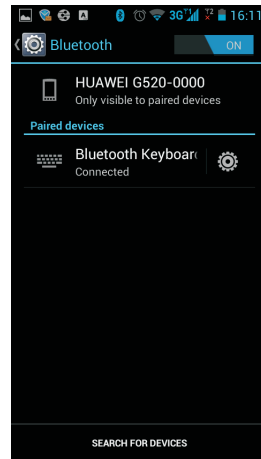

5.Connected successfully

Touchpad mode

Move finger on the touchpad, from left to right is Touchpad mode; from right to left is Numeric keypad.



Function description of keyboard



System Keys \	Fn+F1 (iOS)	Fn+F2 (Android)	Fn+F3(windows)
ESC	ESC	ESC	ESC
F1	Ejest	Ejest	F1
F2	Scarch	Scarch	F2
F3	Screen Save		F3
F4	Black Screen		F4
F5	Screen Lock	Screen Lock	F5
F6		Mail	F6
F7		Previous Track	F7
F8	Play/Pause	Play/Pause	F8
F9	Next Track	Next Track	F9
F10	Volume Down	Volume Down	F10
F11	Mute	Mute	F11
F12	Volume Up	Volume Up	F12
PrtScr SysRq	PrtScr SysRq		PrtScr SysRq
Insert	Main Page		Insert

Binds keys description
all binds key must work with Fn, for example: if you want to operate key “Home”, you have to press key “Fn” and key “↓” together,

Item	Fuction	Operation
los	IOS	Press “F1” and “Fn” together
Android	Android	Press “F2” and “Fn” together
Windows	Windows	Press “F3” and “Fn” together
PgDn	Page Down	Press “↓” and “Fn” together
PgUp	Page Up	Press “↑” and “Fn” together
End	End	Press “→” and “Fn” together
Home	Home	Press “←” and “Fn” together

WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be treated as household or genaral waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Notice to customers



This symbol on the battery indicates that the battery is to be collected separately.
The following applies only to users in European countries.
This battery is designed for sperate collection at an appropriate collection point.
Do not diapose of as household waste.
For more information,contact the retailer or local authorities in charge of waste,management.

Caution :

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Compliance statement:

1: This device is verified to comply with Part 15 of the FCC Rules. Operation subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

2: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if installed And used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

应用

蓝牙键盘应用于家庭娱乐、教育、培训、会议、演讲和投影仪

iPAD、iPhone和三星等智能手机的外接键盘

Windows/Mac 电脑、机顶盒

包装清单

蓝牙键盘 1

说明书 1

特征

QWERTY全键盘布局

触摸板可切换为鼠标模式和数字模式两种

支持多点触摸和滚动条

支持多国语言

规格

蓝牙连接

电源：DC 3V (1.5V AAA电池 2节)

距离：最大半径10m

尺寸：262x84x34mm

重量：170g

支持系统

Windows

iOS

Android

注意：同时按住Fn+Windows/IOS/Android可以切换到相应系统的键值

开机

1.打开电池盖，把两节AAA电池装进去，盖好电池盖；



2.打开键盘电源开关



连接电脑

Windows XP/2000

连接建立：首先要确定你要连接的电脑是否具有蓝牙功能，如果没有的话，你必须要有个蓝牙适配器使之与电脑相连接。

- 1.1 打开电脑中蓝牙通信软件,使之处于可搜寻其它蓝牙设备的状态.具体操作请参考其蓝牙设备说明书.这里所描述的只是作为参考. 打开"控制面板",找到蓝牙设备图标,右击该图标,选择"打开",在弹出来的对话框里单击"贴加",在接下来弹出的对话框中选择"我设备已连接并设置好,可以查找" 然后单击"下一步".电脑会自动搜索已打开的其它蓝牙设备。
- 1.2 拨动蓝牙键盘的开关至ON处,打开电源.单击"Esc+K"(大约5秒)然后松开该键，进行搜索。

注：在操作过程中，不要再按"Esc+K"键，否则连接会断开的，

1.3 搜索成功后会出现如下对话框,单击该图标,选择"下一步"



1.4 在接下来弹出的对话框里,软件会要求你输入连接密码,此时你可以按要求输入你软件给你的随机密码,同时你也可以选择不要输入密码。然后软件会自动安装,至此连接配对成功,你可以使用蓝牙键盘。

连接 iPad/ iPhone

1. 打开键盘的电源开关,按住“Esc+K”约5秒,使键盘进入到可搜索并配对状态。
2. 单击iPhone手机上的“设置”=》“蓝牙”。iPhone会自动搜索其它可配对的蓝牙设备。
3. 待手机搜索到蓝牙键盘,在下拉列表中会出现"Bluetooth iPazzPort" 单击该"Bluetooth iPazzPort",程序会自动安装蓝牙键盘,并提示要求输入密码,在蓝牙键盘输入密码并按“Enter"确认(表示连接成功)。



连接安卓系统

1. 激活手机上的蓝牙设备，使蓝牙处于搜索状态
2. 打开蓝牙键盘的电源开关，按住“Esc+K”键(大概5秒)。
3. 当手机搜索到蓝牙键盘时,手机上的蓝牙设备列表里面会出现"Bluetooth Keyboard"
4. 单击"Bluetooth Keyboard "图标，进行配对。
5. 当提示输入密码时，在键盘上同时输入密码，然后按"回车键"确认,表示连接成功.


注意:1. 因不同的手机品牌采用不同的蓝牙芯片，以及不同的方案，一些蓝牙芯片不支持 HID 协议，所以会出现一些手机能配对，但不能连接使用的情况，
2. 不同的品牌的手机可能操作步骤稍有区别，请按照手机提示进行操作。



1.单击“设置”



2.单击“蓝牙”
进入蓝牙设置界面

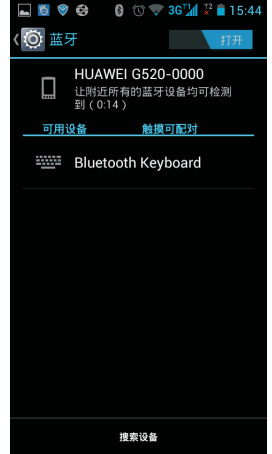

3.打开蓝牙,
进行设备搜索



4.在键盘上输入 "3225",
然后按"回车键"



5.连接成功

触摸板模式

手指放在触摸板上,从左滑向右,为鼠标模式;则从右滑向左,为数字模式.

打开“数字模式”
← 打开“鼠标模式”



键盘功能描述



系统 按键	Fn+F1 (iOS)	Fn+F2 (Android)	Fn+F3(windows)
ESC	ESC	ESC	ESC
F1	Ejest	Ejest	F1
F2	搜索	搜索	F2
F3	Screen Save		F3
F4	锁屏		F4
F5	Screen Lock	锁屏	F5
F6		邮件	F6
F7	上一曲	上一曲	F7
F8	暂停/播放	暂停/播放	F8
F9	下一曲	下一曲	F9
F10	音量减小	音量减小	F10
F11	静音	静音	F11
F12	音量增大	音量增大	F12
PrtScr SysRq	抓屏		抓屏
Insert	主屏幕	主屏幕	Insert

组合键

所有的组合键都必须与Fn配合使用，例如你想操作Home键，你就要按住Fn+↓

	功能	操作
los	iOS	按住Fn+F1
Android	Android	按住Fn+F2
Windows	Windows	按住Fn+F3
PgDn	向上翻页键	按住Fn+↓
PgUp	向下翻页键	按住Fn+↑
End	End	按住Fn+→
Home	Home	按住Fn+←