

# IPA T RLY4

IP Link® Accessory with Four Relays



## FEATURES

- Controls screens, projectors, lights, security gates, and more
- Provides four independent relays
- Works independently or as an add-on to any IP Link® product with Flex I/O ports

## DESCRIPTION

The Extron **IPA T RLY4** is an IP Link® Accessory with Four Relays for controlling screens, projectors, lights, security gates, and more. It provides four independent relays and can be used as a free standing device or added on to any IP Link product with Flex I/O ports.

## SPECIFICATIONS


### RELAY CONTROL

Relay control ports number / Type .....	4 momentary
Relay control connectors .....	(1) 3.5 mm captive screw connectors, 5 pole, for control input and power (4) 3.5 mm captive screw connectors, 3 pole, NO & NC for configurable relay outputs
Relay coil operating current .....	0.015 A
Relay control contact rating .....	24 V, 1 A

### GENERAL

Temperature / Humidity .....	Storage: -40 to +158 °F (-40 to +70 °C) / 10% to 90%, noncondensing Operating: -32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing
Rack mount .....	No
Enclosure type .....	Plastic
Enclosure dimensions .....	1.0" H x 2.4" W x 2.3" D 2.5 cm H x 6.1 cm W x 5.8 cm D
Product weight .....	0.1 lbs (<0.1 kg)
Shipping weight .....	1 lb (1 kg)
Vibration .....	ISTA 1A in carton (International Safe Transit Association)
Listings .....	UL, CUL
Compliances .....	CE, FCC Class A, VCCI, AS/NZS, ICES
MTBF .....	30,000 hours
Warranty .....	3 years parts and labor

NOTE: All nominal levels are at ±10%. Specifications are subject to change without notice.

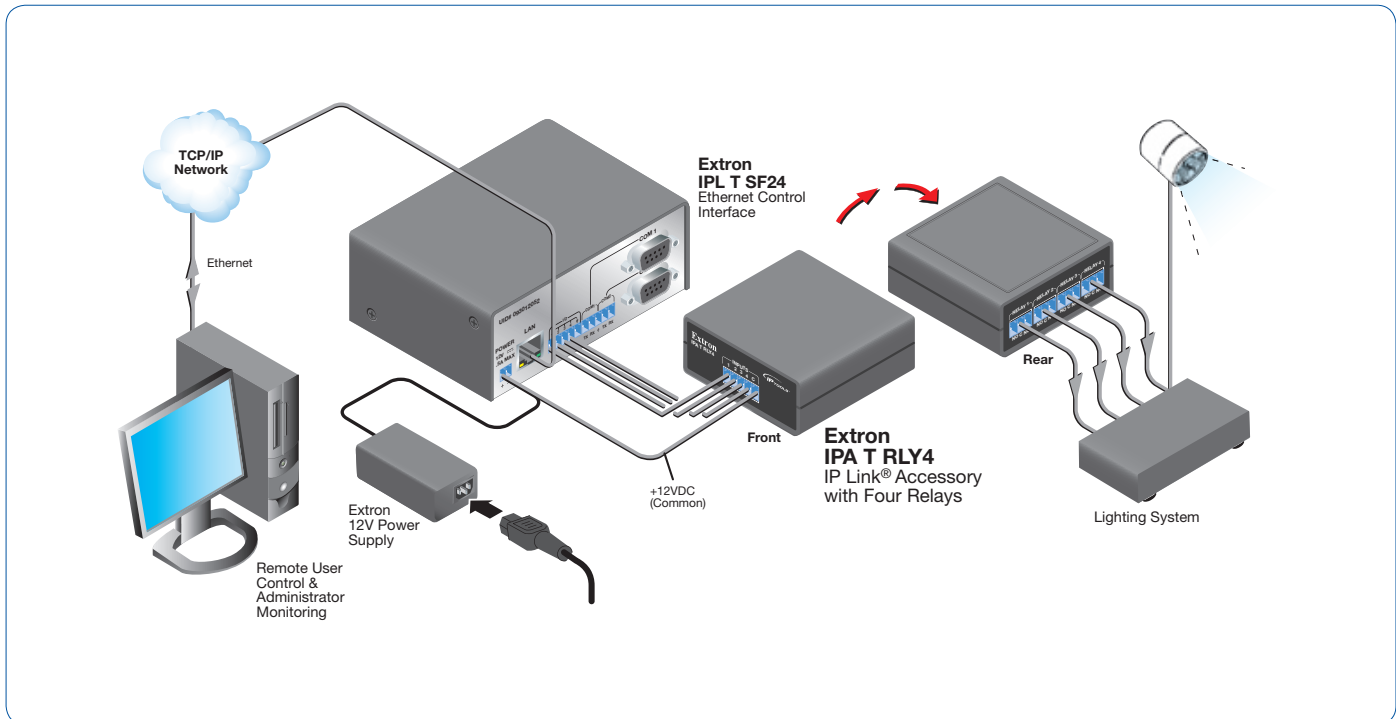

## MODEL

IPA T RLY4

## VERSION DESCRIPTION

Four Relays .....

## PART #

60-545-03