


IronHorse® Worm Gearbox User Manual

IH-WG-USERS-M-WO

3rd Edition



**BLANK
PAGE**

WARNING

Thank you for purchasing automation equipment from **AutomationDirect.com®**, doing business as, **AutomationDirect**. We want your new automation equipment to operate safely. Anyone who installs or uses this equipment should read this publication (and any other relevant publications) before installing or operating the equipment.

To minimize the risk of potential safety problems, you should follow all applicable local and national codes that regulate the installation and operation of your equipment. These codes vary from area to area and usually change with time. It is your responsibility to determine which codes should be followed, and to verify that the equipment, installation, and operation is in compliance with the latest revision of these codes.

At a minimum, you should follow all applicable sections of the National Fire Code, National Electrical Code, and the codes of the National Electrical Manufacturer's Association (NEMA). There may be local regulatory or government offices that can also help determine which codes and standards are necessary for safe installation and operation.

Equipment damage or serious injury to personnel can result from the failure to follow all applicable codes and standards. We do not guarantee the products described in this publication are suitable for your particular application, nor do we assume any responsibility for your product design, installation, or operation.

Our products are not fault-tolerant and are not designed, manufactured or intended for use or resale as on-line control equipment in hazardous environments requiring fail-safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines, or weapons systems, in which the failure of the product could lead directly to death, personal injury, or severe physical or environmental damage ("High Risk Activities"). **AutomationDirect** specifically disclaims any expressed or implied warranty of fitness for High Risk Activities.

For additional warranty and safety information, see the Terms and Conditions section of our catalog. If you have any questions concerning the installation or operation of this equipment, or if you need additional information, please call us at 770-844-4200.

This publication is based on information that was available at the time it was printed. At **AutomationDirect** we constantly strive to improve our products and services, so we reserve the right to make changes to the products and/or publications at any time without notice and without any obligation. This publication may also discuss features that may not be available in certain revisions of the product.

Trademarks

This publication may contain references to products produced and/or offered by other companies. The product and company names may be trademarked and are the sole property of their respective owners. **AutomationDirect** disclaims any proprietary interest in the marks and names of others.

Copyright 2008, 2009, 2014, **AutomationDirect.com® Incorporated**
All Rights Reserved

No part of this manual shall be copied, reproduced, or transmitted in any way without the prior, written consent of **AutomationDirect.com® Incorporated**. **AutomationDirect** retains the exclusive rights to all information included in this document.

⚡ AVERTISSEMENT ⚡

Nous vous remercions d'avoir acheté l'équipement d'automatisation de **AutomationDirect.com®**, en faisant des affaires comme, **AutomationDirect**. Nous tenons à ce que votre nouvel équipement d'automatisation fonctionne en toute sécurité. Toute personne qui installe ou utilise cet équipement doit lire la présente publication (et toutes les autres publications pertinentes) avant de l'installer ou de l'utiliser.

Afin de réduire au minimum le risque d'éventuels problèmes de sécurité, vous devez respecter tous les codes locaux et nationaux applicables régissant l'installation et le fonctionnement de votre équipement. Ces codes diffèrent d'une région à l'autre et, habituellement, évoluent au fil du temps. Il vous incombe de déterminer les codes à respecter et de vous assurer que l'équipement, l'installation et le fonctionnement sont conformes aux exigences de la version la plus récente de ces codes.

Vous devez, à tout le moins, respecter toutes les sections applicables du Code national de prévention des incendies, du Code national de l'électricité et des codes de la National Electrical Manufacturer's Association (NEMA). Des organismes de réglementation ou des services gouvernementaux locaux peuvent également vous aider à déterminer les codes ainsi que les normes à respecter pour assurer une installation et un fonctionnement sûrs.

L'omission de respecter la totalité des codes et des normes applicables peut entraîner des dommages à l'équipement ou causer de graves blessures au personnel. Nous ne garantissons pas que les produits décrits dans cette publication conviennent à votre application particulière et nous n'assumons aucune responsabilité à l'égard de la conception, de l'installation ou du fonctionnement de votre produit.

Nos produits ne sont pas insensibles aux défaillances et ne sont ni conçus ni fabriqués pour l'utilisation ou la revente en tant qu'équipement de commande en ligne dans des environnements dangereux nécessitant une sécurité absolue, par exemple, l'exploitation d'installations nucléaires, les systèmes de navigation aérienne ou de communication, le contrôle de la circulation aérienne, les équipements de survie ou les systèmes d'armes, pour lesquels la défaillance du produit peut provoquer la mort, des blessures corporelles ou de graves dommages matériels ou environnementaux («activités à risque élevé»). La société **AutomationDirect** nie toute garantie expresse ou implicite d'aptitude à l'emploi en ce qui a trait aux activités à risque élevé.

Pour des renseignements additionnels touchant la garantie et la sécurité, veuillez consulter la section Modalités et conditions de notre documentation. Si vous avez des questions au sujet de l'installation ou du fonctionnement de cet équipement, ou encore si vous avez besoin de renseignements supplémentaires, n'hésitez pas à nous téléphoner au 770-844-4200.

Cette publication s'appuie sur l'information qui était disponible au moment de l'impression. À la société **AutomationDirect**, nous nous efforçons constamment d'améliorer nos produits et services. C'est pourquoi nous nous réservons le droit d'apporter des modifications aux produits ou aux publications en tout temps, sans préavis ni quelque obligation que ce soit. La présente publication peut aussi porter sur des caractéristiques susceptibles de ne pas être offertes dans certaines versions révisées du produit.

Marques de commerce

La présente publication peut contenir des références à des produits fabriqués ou offerts par d'autres entreprises. Les désignations des produits et des entreprises peuvent être des marques de commerce et appartiennent exclusivement à leurs propriétaires respectifs. **AutomationDirect** nie tout intérêt dans les autres marques et désignations.

Copyright 2008, 2009, 2014, Automationdirect.com® Incorporated
Tous droits réservés

Nulle partie de ce manuel ne doit être copiée, reproduite ou transmise de quelque façon que ce soit sans le consentement préalable écrit de la société **Automationdirect.com® Incorporated**. **AutomationDirect** conserve les droits exclusifs à l'égard de tous les renseignements contenus dans le présent document.

IRONHORSE® WORM GEARBOX

USER MANUAL



Please include the Manual Number and the Manual Issue, both shown below, when communicating with Technical Support regarding this publication.

Manual Number: IH-WG-User-M-WO
Issue: 3rd Edition
Issue Date: 10/24/2014

Publication History		
Issue	Date	Description of Changes
First Edition	06/2008	Original Issue
1st Ed, Rev A	06/2008	Gearbox mounting orientation (Chapter 2)
Second Edition	04/2009	Added cast-iron hollow-bore gearboxes
Third Edition	10/2014	Renamed User Manual (was WG-User-M-WO) Added aluminum gearboxes Rearranged chapters Revised output shaft dimensions for cast-iron solid-shaft gearboxes (Chapter 2)

IRONHORSE® WORM GEARBOX

USER MANUAL TABLE OF CONTENTS



IronHorse® Worm Gearbox User Manual Contents

WARNING	W-1
Trademarks	W-1
AVERTISSEMENT	W-2
Marques de commerce	W-2
User Manual Publication History	H-1
Chapter 1: Getting Started	1-1
Manual Overview	1-2
Overview of This Publication	1-2
Who Should Read This Manual	1-2
Technical Support	1-2
Special Symbols	1-2
IronHorse® Worm Gearbox Introduction	1-3
Purpose of Worm Gearboxes	1-3
Package Contents	1-3
Part Number Explanation	1-4
Nameplate Information	1-4
Chapter 2: Cast-Iron Worm Gearboxes	2-1
Gearbox Selection Factors	2-2
Service Factors and K Factors	2-2
IronHorse® Cast-Iron Worm Gearbox Specifications	2-3
IronHorse® Cast-Iron Worm Gearbox Dimensions	2-7
Solid-Shaft Output Gearboxes WG-xxx-xxx-D/R	2-7
Hollow-Bore Output Gearboxes WG-xxx-xxx-H	2-8
IronHorse® Cast-Iron Worm Gearbox Accessory Mounting Bases	2-9

Chapter 3: Aluminum Worm Gearboxes	3-1
Gearbox Selection Factors	3-2
Service Factors and K Factors	3-2
IronHorse® Aluminum Worm Gearbox Specifications	3-3
IronHorse® Aluminum Worm Gearbox Dimensions	3-5
IronHorse® Aluminum Worm Gearbox Accessories	3-6
Chapter 4: Installation and Lubrication	4-1
IronHorse® Worm Gearbox Installation	4-2
Installation Instructions	4-2
Vent Plug Installation – (Cast-Iron Gearboxes only)	4-3
IronHorse® Worm Gearbox Lubrication & Mounting Orientations	4-4
Lubrication Instructions	4-4
Lubricant Capacities & Mounting Orientations	4-5
Appendix A: Glossary of Terms	A-1
Glossary of Gearbox Terms	A-2
Appendix B: Gearbox Selection	B-1
Gearbox Selection Procedure	B-2
Gearbox Selection Steps	B-2
Gearbox Selection Example	B-2

GETTING STARTED



CHAPTER 1

In This Chapter...

Manual Overview	1-2
Overview of This Publication	1-2
Who Should Read This Manual	1-2
Technical Support	1-2
Special Symbols	1-2
IronHorse® Worm Gearbox Introduction	1-3
Purpose of Worm Gearboxes	1-3
Package Contents	1-3
Part Number Explanation	1-4
Nameplate Information	1-4

Manual Overview

Overview of This Publication

The IronHorse Worm Gearbox User Manual describes the installation, operation, and preventative maintenance of IronHorse Worm Gearboxes.

Who Should Read This Manual

This manual contains important information for people who will install, maintain, and/or operate any of the IronHorse Worm Gearboxes.

Technical Support

Our technical support group is glad to work with you to answer your questions. Please call the technical support group if you need technical assistance, or visit our web site. Our website contains technical and non-technical information about our products and our company.

By telephone: (770) 844-4200 (Mon – Fri, 9:00 am – 6:00 pm ET)

On the Web: www.automationdirect.com

Special Symbols



When you see the “notepad” icon in the left-hand margin, the paragraph to its immediate right will be a special note which presents information that may make your work quicker or more efficient. The word “NOTE” will mark the beginning of the text.



When you see the “exclamation point” icon in the left-hand margin, the paragraph to its immediate right will be a warning. This information could prevent injury, loss of property, or even death (in extreme cases). Any warning in this manual should be regarded as critical information that should be read in its entirety. The word “WARNING” in boldface will mark the beginning of the text.

IronHorse® Worm Gearbox Introduction

Purpose of Worm Gearboxes

Gearboxes, also known as enclosed gear drives or speed reducers, are mechanical drive components that can control a load at a reduced fixed ratio of the motor speed. The output torque is also increased by the same ratio, while the horsepower remains the same (less efficiency losses). For example, a 10:1 ratio gearbox outputs approximately the same motor output horsepower, but motor speed is divided by 10, and motor torque is multiplied by 10.

Worm gearboxes contain a worm-type gear on the input shaft, and a spur-type mating gear on the output shaft. Worm gearboxes also change the drive direction by 90 degrees. IronHorse worm gearboxes are manufactured in an ISO9001 certified plant by one of the leading and most internationally acclaimed gearbox manufacturers in the world today. Only the highest quality materials are tested, certified, and used in the manufacturing process. Strict adherence to and compliance with the toughest international and U.S. testing standards and manufacturing procedures assure you the highest quality products.

We offer right-angle worm gearboxes with aluminum frames and with cast-iron frames. The output shafts are perpendicular to the inputs, and change the drive direction(s) by 90°. Our gearboxes utilize C-face mounting interfaces for C-face motors.

Our cast-iron gearboxes feature right-hand and dual (both right and left) output shafts, and with hollow-bore outputs (all the way through from one side to the other). We also offer optional gearbox mounting bases for ease of installation of these cast-iron gearboxes.


Our aluminum gearboxes feature hollow-bore outputs (all the way through from one side to the other). We also offer optional single and double output shafts, output flanges, torque arms, and output covers.

Package Contents

After receiving the IronHorse Worm Gearbox, please check for the following:


- Make sure the package includes the speed reducer and the vent plug. (Vent plugs not included or required for aluminum gearboxes.)
- Inspect the unit to insure it was not damaged during shipment.
- Make sure that the part number on the gearbox nameplate is the same as the part number that you ordered.

Part Number Explanation

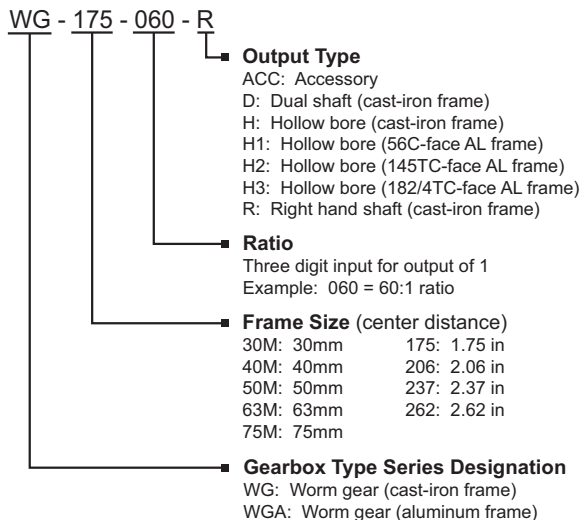


Nameplate Information

WG Cast-Iron Gearbox

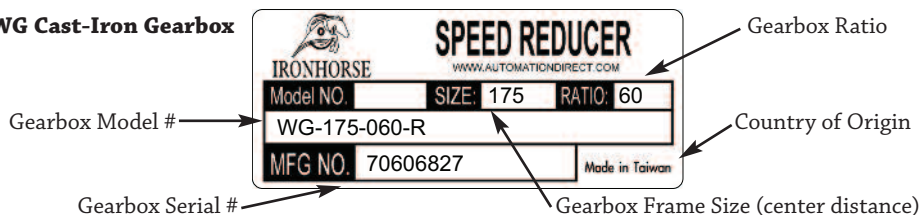

WGA Aluminum Gearbox

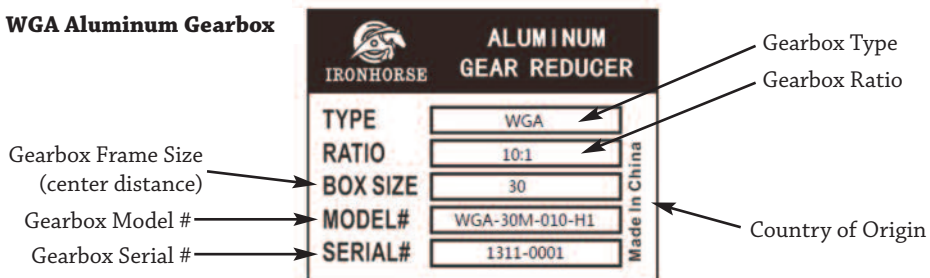

CAST-IRON WORM GEARBOXES



CHAPTER 2

In This Chapter...

Gearbox Selection Factors	2-2
IronHorse® Cast-Iron Worm Gearbox Specifications	2-3
IronHorse® Cast-Iron Worm Gearbox Dimensions	2-7
IronHorse® Cast-Iron Worm Gearbox Accessory Mounting Bases ...	2-9



Gearbox Selection Factors

Service Factors and K Factors

Service Factors for Selecting Gearboxes (when used with electric motors)				
Service Continuity (per day)	Load Characteristics			
	Uniform	Moderate Shock*	Heavy Shock*	Extreme Shock*
Occasional 1/2 hour	1.00	1.00	1.00	1.25
Less than 3 hours	1.00	1.00	1.25	1.50
3-10 hours	1.00	1.25	1.50	1.75
More than 10 hours	1.25	1.50	1.75	2.00
* Shock results from sudden increases in the torque demand of the load, such as: sudden stopping, restarting, and/or reversing; significantly heavy loads dropped onto a moving conveyor; impact loads such as punch press operations.				
Depending upon the load characteristics, divide the gearbox HP, Overhung Load, and Maximum Mechanical Capacity ratings by the applicable service factor.				

Overhung Load K Factors for Various Drive Types	
Chain & Sprocket	1.00
Gear	1.25
V-belt	1.50
Flat Belt	2.50
Variable Pitch Belt	3.50
Divide gearbox OHL ratings by the applicable OHL K factors.	

IronHorse® Cast-Iron Worm Gearbox Specifications

IronHorse Cast-Iron Worm Gearbox Specifications – Frame Size 175																	
Part Number	Ratio	Output RPM @ 1750 rpm Input	Nominal Motor HP 1 @ 1800 rpm	NEMA Motor Frame	Output Type 2	Center Distance 3 (in)	Overhung Load 4 (lb)	Thrust Load 5 (lb)	Efficiency (%)	Approx Weight (lb)	Maximum Ratings @ 1750 rpm Input						Maximum Input Speed (rpm)
											Mechanical 6			Thermal 7			
											Input Power (hp)	Output Power (hp)	Output Torque (lb-in)	Input Power (hp)	Output Power (hp)	Output Torque (lb-in)	
WG-175-005-D	5:1	350	1-1/2	56C	D	1.75	650	550	93	23	2.83	2.62	499	2.28	2.11	402	2500
WG-175-005-H					H					27							
WG-175-005-R					R					22							
WG-175-010-D	10:1	175	1	56C	D				88	23	1.57	1.38	515	1.36	1.19	445	
WG-175-010-H					H					27							
WG-175-010-R					R					22							
WG-175-015-D	15:1	117	3/4	56C	D				85	23	1.24	1.06	554	1.13	0.96	506	
WG-175-015-H					H					27							
WG-175-015-R					R					22							
WG-175-020-D	20:1	88	3/4	56C	D				83	23	1.26	1.04	737	0.98	0.81	572	
WG-175-020-H					H					27							
WG-175-020-R					R					22							
WG-175-040-D	40:1	44	1/3	56C	D				62	23	0.79	0.49	714	0.45	0.28	404	
WG-175-040-H					H					27							
WG-175-040-R					R					22							
WG-175-060-D	60:1	29	1/4	56C	D				52	23	0.38	0.20	433	0.35	0.19	404	
WG-175-060-H					H					27							
WG-175-060-R					R					22							

1) Nominal Motor HP is the highest HP 1800 rpm motor to be used with the gearbox under conditions of 1.0 service factor. Gearbox input power capacity decreases as motor speed decreases and as service factor increases.

2) Output Type: D = Dual Shaft; H = Hollow Bore; R = Right-Hand Shaft

3) The Center Distance is the distance between the centerlines of the input and output shafts/bores; serves as the gearbox frame size.

4) Overhung Load ratings are for forces perpendicular to the output shaft and located at the shaft midpoint, such as from a gear, pulley, or sprocket with a belt or chain. Divide OHL ratings by the applicable OHL K factors shown separately in the Selection Factors tables. OHL ratings should also be divided by applicable service factors.

5) Thrust Load ratings are for forces along the axis of the output shaft, usually encountered in vertical-drive applications from agitators, mixers, fans, blowers, etc.

6) Maximum Mechanical Ratings are limits based on strength and durability of gearbox components; applicable when operating time is short and stopped time is greater than or equal to operating time. These ratings are applicable for 1.0 service factor loads, and may require modification depending upon characteristics of the applicable driven loads. Refer to the “Service Factors” table for more information.

7) Maximum Thermal Ratings are limits for gearbox continuous use without overheating.

IronHorse® Cast-Iron Worm Gearbox Specifications (continued)

IronHorse Cast-Iron Worm Gearbox Specifications – Frame Size 206																	
Part Number	Ratio	Output RPM @ 1750 rpm Input	Nominal Motor HP 1 @ 1800 rpm	NEMA Motor Frame	Output Type 2	Center Distance 3 (in)	Overhung Load 4 (lb)	Thrust Load 5 (lb)	Efficiency (%)	Approx Weight (lb)	Maximum Ratings @ 1750 rpm Input						Maximum Input Speed (rpm)
											Mechanical 6			Thermal 7			
											Input Power (hp)	Output Power (hp)	Output Torque (lb-in)	Input Power (hp)	Output Power (hp)	Output Torque (lb-in)	
WG-206-005-D	5:1	350	2	56C	D	2.06	700	750	27.9	92	3.62	3.33	925	2.57	2.36	657	2500
WG-206-005-H					H				32								
WG-206-005-R					R				27.3								
WG-206-010-D	10:1	175	1-1/2	56C	D				27.9	90	2.77	2.50	935	2.10	1.89	708	
WG-206-010-H					H				32								
WG-206-010-R					R				27.3								
WG-206-015-D	15:1	117	1	56C	D				27.9	85	2.09	1.78	1002	1.40	1.20	673	
WG-206-015-H					H				32								
WG-206-015-R					R				27.3								
WG-206-020-D	20:1	88	1	56C	D				27.9	82	1.57	1.29	914	1.17	0.96	681	
WG-206-020-H					H				32								
WG-206-020-R					R				27.3								
WG-206-040-D	40:1	44	1/2	56C	D				27.9	71	1.09	0.77	1120	0.71	0.50	726	
WG-206-040-H					H				32								
WG-206-040-R					R				27.3								
WG-206-060-D	60:1	29	1/3	56C	D				27.9	58	0.60	0.35	750	0.48	0.28	606	
WG-206-060-H					H				32								
WG-206-060-R					R				27.3								

1) Nominal Motor HP is the highest HP 1800 rpm motor to be used with the gearbox under conditions of 1.0 service factor. Gearbox input power capacity decreases as motor speed decreases and as service factor increases.

2) Output Type: D = Dual Shaft; H = Hollow Bore; R = Right-Hand Shaft

3) The Center Distance is the distance between the centerlines of the input and output shafts/bores; serves as the gearbox frame size.

4) Overhung Load ratings are for forces perpendicular to the output shaft and located at the shaft midpoint, such as from a gear, pulley, or sprocket with a belt or chain. Divide OHL ratings by the applicable OHL K factors shown separately in the Selection Factors tables. OHL ratings should also be divided by applicable service factors.

5) Thrust Load ratings are for forces along the axis of the output shaft, usually encountered in vertical-drive applications from agitators, mixers, fans, blowers, etc.

6) Maximum Mechanical Ratings are limits based on strength and durability of gearbox components; applicable when operating time is short and stopped time is greater than or equal to operating time. These ratings are applicable for 1.0 service factor loads, and may require modification depending upon characteristics of the applicable driven loads. Refer to the “Service Factors” table for more information.

7) Maximum Thermal Ratings are limits for gearbox continuous use without overheating.

IronHorse® Cast-Iron Worm Gearbox Specifications (continued)

IronHorse Cast-Iron Worm Gearbox Specifications – Frame Size 237																	
Part Number	Ratio	Output RPM @ 1750 rpm Input	Nominal Motor HP ¹ @ 1800 rpm	NEMA Motor Frame	Output Type ²	Center Distance ³ (in)	Overhung Load ⁴ (lb)	Thrust Load ⁵ (lb)	Efficiency (%)	Approx Weight (lb)	Maximum Ratings @ 1750 rpm Input						Maximum Input Speed (rpm)
											Mechanical ⁶			Thermal ⁷			
											Input Power (hp)	Output Power (hp)	Output Torque (lb-in)	Input Power (hp)	Output Power (hp)	Output Torque (lb-in)	
WG-237-005-D	5:1	350	3	56C	D	2.37	900	900	93	37.6	4.32	4.02	766	3.56	3.31	630	
WG-237-005-H					H					38							
WG-237-005-R					R					36.7							
WG-237-010-D	10:1	175	1-1/2		D				89	37.6	3.47	3.09	1158	2.24	1.99	746	
WG-237-010-H					H					38							
WG-237-010-R					R					36.7							
WG-237-015-D	15:1	117	1		D				84	37.6	2.64	2.22	1249	1.55	1.30	732	
WG-237-015-H					H					38							
WG-237-015-R					R					36.7							
WG-237-020-D	20:1	88	1		D				82	37.6	2.06	1.69	1195	1.36	1.12	791	
WG-237-020-H					H					38							
WG-237-020-R					R					36.7							
WG-237-040-D	40:1	44	1/2		D				71	37.6	1.45	1.02	1483	0.83	0.58	845	
WG-237-040-H					H					38							
WG-237-040-R					R					36.7							
WG-237-060-D	60:1	29	1/2		D				61	37.6	0.86	0.53	1149	0.63	0.39	844	
WG-237-060-H					H					38							
WG-237-060-R					R					36.7							
<div>1) Nominal Motor HP is the highest HP 1800 rpm motor to be used with the gearbox under conditions of 1.0 service factor. Gearbox input power capacity decreases as motor speed decreases and as service factor increases.</div> <div>2) Output Type: D = Dual Shaft; H = Hollow Bore; R = Right-Hand Shaft</div> <div>3) The Center Distance is the distance between the centerlines of the input and output shafts/bores; serves as the gearbox frame size.</div> <div>4) Overhung Load ratings are for forces perpendicular to the output shaft and located at the shaft midpoint, such as from a gear, pulley, or sprocket with a belt or chain. Divide OHL ratings by the applicable OHL K factors shown separately in the Selection Factors tables. OHL ratings should also be divided by applicable service factors.</div> <div>5) Thrust Load ratings are for forces along the axis of the output shaft, usually encountered in vertical-drive applications from agitators, mixers, fans, blowers, etc.</div> <div>6) Maximum Mechanical Ratings are limits based on strength and durability of gearbox components; applicable when operating time is short and stopped time is greater than or equal to operating time. These ratings are applicable for 1.0 service factor loads, and may require modification depending upon characteristics of the applicable driven loads. Refer to the “Service Factors” table for more information.</div> <div>7) Maximum Thermal Ratings are limits for gearbox continuous use without overheating.</div>																	

IronHorse® Cast-Iron Worm Gearbox Specifications (continued)

IronHorse Cast-Iron Worm Gearbox Specifications – Frame Size 262																	
Part Number	Ratio	Output RPM @ 1750 rpm Input	Nominal Motor Hp 1 @ 1800 rpm	NEMA Motor Frame	Output Type 2	Center Distance 3 (in)	Overhung Load 4 (lb)	Thrust Load 5 (lb)	Efficiency (%)	Approx Weight (lb)	Maximum Ratings @ 1750 rpm Input						Maximum Input Speed (rpm)
											Mechanical 6			Thermal 7			
											Input Power (hp)	Output Power (hp)	Output Torque (lb-in)	Input Power (hp)	Output Power (hp)	Output Torque (lb-in)	
WG-262-005-D	5:1	350	3	182TC	D	2.62	1000	1000	93	57.0	5.24	4.86	924	4.32	4.00	761	2500
WG-262-005-H					H					50							
WG-262-005-R					R					55.7							
WG-262-010-D	10:1	175	2	D	90				57.0	4.17	3.74	1445	3.06	2.75	1061		
WG-262-010-H				H					50								
WG-262-010-R				R					55.7								
WG-262-015-D	15:1	117	2	D	87				49.9	3.22	2.81	1577	2.47	2.16	1212		
WG-262-015-H				H					50								
WG-262-015-R				R					48.6								
WG-262-020-D	20:1	88	1-1/2	D	83				49.9	2.67	2.21	1563	1.84	1.53	1078		
WG-262-020-H				H					50								
WG-262-020-R				R					48.6								
WG-262-040-D	40:1	44	3/4	D	72				49.9	1.85	1.32	1919	1.11	0.80	1153		
WG-262-040-H				H					50								
WG-262-040-R				R					48.6								
WG-262-060-D	60:1	29	3/4	D	66				49.9	1.16	0.77	1670	0.94	0.62	1346		
WG-262-060-H				H					50								
WG-262-060-R				R					48.6								

1) Nominal Motor HP is the highest HP 1800 rpm motor to be used with the gearbox under conditions of 1.0 service factor. Gearbox input power capacity decreases as motor speed decreases and as service factor increases.

2) Output Type: D = Dual Shaft; H = Hollow Bore; R = Right-Hand Shaft

3) The Center Distance is the distance between the centerlines of the input and output shafts/bores; serves as the gearbox frame size.

4) Overhung Load ratings are for forces perpendicular to the output shaft and located at the shaft midpoint, such as from a gear, pulley, or sprocket with a belt or chain. Divide OHL ratings by the applicable OHL K factors shown separately in the Selection Factors tables. OHL ratings should also be divided by applicable service factors.


5) Thrust Load ratings are for forces along the axis of the output shaft, usually encountered in vertical-drive applications from agitators, mixers, fans, blowers, etc.

6) Maximum Mechanical Ratings are limits based on strength and durability of gearbox components; applicable when operating time is short and stopped time is greater than or equal to operating time. These ratings are applicable for 1.0 service factor loads, and may require modification depending upon characteristics of the applicable driven loads. Refer to the "Service Factors" table for more information.

7) Maximum Thermal Ratings are limits for gearbox continuous use without overheating.

IronHorse® Cast-Iron Worm Gearbox Dimensions


Solid-Shaft Output Gearboxes WG-xxx-xxx-D/R

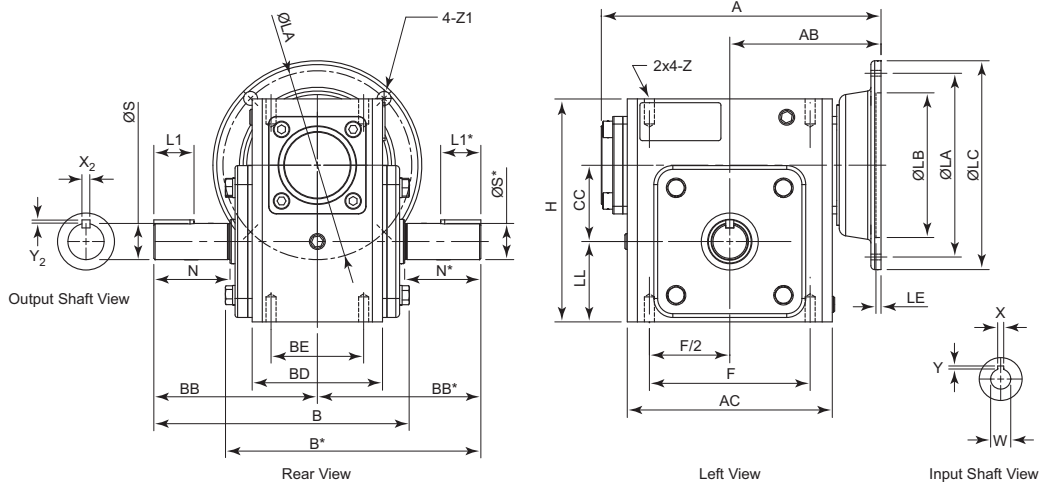

* Left side output shafts are present only on dual-shaft models (WG-xxx-xxx-D)

Dimensions (inches) – IronHorse Cast-Iron Worm Gearboxes – Solid-Shaft Outputs														
Part Number	Frame	A	AB	AC	B	BB	BD	BE	CC	F	H	LL	Z (UNC)	
WG-175-xxx-D/R	56C	7.29	4.035	5.06	6.83	4.311	3.56	2.75	1.75	4.188	5.75	2.062	3/8-16	
WG-206-xxx-D/R		7.95	4.37	5.75	7.25	4.69	3.82	2.88	2.062	5	6.38	2.281		
WG-237-xxx-D/R		8.71	4.705	6.38	7.95	5.087	4.06	2.88	2.375	5	6.94	2.5		
WG-262-005-D/R	182TC	10.57	6.24	7.17	8.87	5.63	4.69	3.375	2.625	6.375	8	2.938		
WG-262-010-D/R														
WG-262-015-D/R	56C	9.41	5.059											
WG-262-020-D/R														
WG-262-040-D/R														
WG-262-060-D/R														
Part # (repeated)	Frame	Flange				Input Shaft				Output Shaft				
		LA	LB	LC	LE	Z1	W	X	Y	L1	N	S	X ₂	Y ₂
WG-175-xxx-D/R	56C	5.875	4.5	6.496	0.157	0.433	0.625	3/16	3/32	1	1.781	0.875	3/16	3/32
WG-206-xxx-D/R										1.25	2.09	1	1/4	1/8
WG-237-xxx-D/R										1.25	2.37			
WG-262-005-D/R	182TC	7.25	8.5	9	0.197	0.551	1.125	1/4	1/8	2	2.626	1.125	1/4	1/8
WG-262-010-D/R														
WG-262-015-D/R	56C	5.875	4.5	6.496	0.157	0.433	0.625	3/16	3/32					
WG-262-020-D/R														
WG-262-040-D/R														
WG-262-060-D/R														
Dual-shaft output gearboxes have B, BB, L1, S, N, X ₂ , & Y ₂ dimensions on both sides.														
Right-hand shaft gearboxes have output shafts only on the right side, as viewed looking into the input shaft.														

IronHorse® Cast-Iron Worm Gearbox Dimensions (continued) Hollow-Bore Output Gearboxes WG-xxx-xxx-H

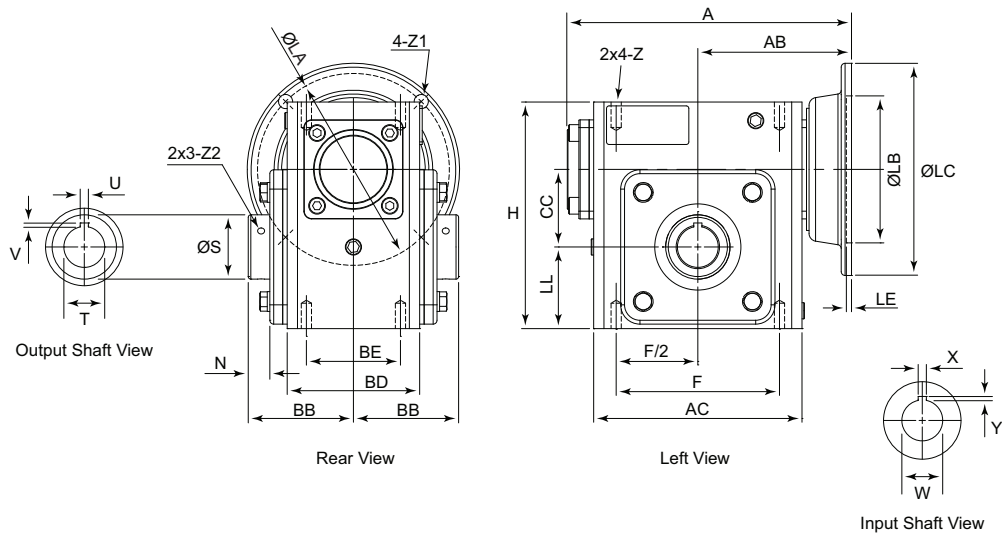


Dimensions (inches) – IronHorse Cast-Iron Worm Gearboxes – Hollow-Bore Outputs

Part Number	Frame	A	AB	AC	BB	BD	BE	CC	F	H	LL	Z (UNC)				
WG-175-xxx-H	56C	7.28	4.035	5.059	3.091	3.563	2.750	1.75	4.188	5.75	2.062	5/16-18				
WG-206-xxx-H		7.95	4.370	5.748	3.219	3.819	2.880	2.062	5.000	6.375	2.281					
WG-237-xxx-H		8.68	4.705	6.378	3.220	4.055	2.880	2.375	5.000	6.937	2.500					
WG-262-005-H	182 TC	10.59	6.240	7.165	3.500	4.685	3.375	2.625	6.375	8.000	2.938	3/8-16				
WG-262-010-H	56C	9.41	5.059													
WG-262-015-H																
WG-262-020-H																
WG-262-040-H																
WG-262-060-H																
Part Number (repeated)	Frame	Flange					Input Shaft			Output Bore						
		LA	LB	LC	LE	Z1	W	X	Y	N	S	T	U	V	Z2 (UNF)	
WG-175-xxx-H	56C	5.875	4.5	6.496	0.157	0.433	0.625	3/16	3/32	0.787	1.575	1.0	1/4	7/64	#10-32	
WG-206-xxx-H										0.797	1.772	1.125		1/8		
WG-237-xxx-H										0.661	1.969	1.250		7/64		
WG-262-005-H	182 TC	7.25	8.5	9.000	0.197	0.551	1.125	1/4	1/8	0.626	2.362	1.437	3/8	5/32	1/4-28	
WG-262-010-H	56C	5.875	4.5	6.496	0.157	0.433	0.625	3/16	3/32							
WG-262-015-H																
WG-262-020-H																
WG-262-040-H																
WG-262-060-H																

IronHorse® Cast-Iron Worm Gearbox Accessory Mounting Bases

Mounting Base Selection and Dimensions

IronHorse Worm Gearbox Mounting Bases												
Part Number	Fits Gearbox Numbers	Approx Weight (lb)	Dimensions (in)									
			A	B	C	D	E	F	t	d1	d2	d3
WG-175-BASE	WG-175-xxx-x	4.0	4.19	2.76	4.50	5.75	5.69	7.00	0.69	0.43	0.35	0.55
WG-206-BASE	WG-206-xxx-x	4.8	5.00	2.88	4.69	6.38	5.91	7.76	0.72	0.47	0.43	0.69
WG-237-BASE	WG-237-xxx-x	6.2	5.00	2.88	4.88	7.06	6.22	8.50	0.75	0.47	0.43	0.69
WG-262-BASE	WG-262-xxx-x	7.5	6.38	3.38	5.25	8.00	6.69	9.65	0.75	0.55	0.43	0.69

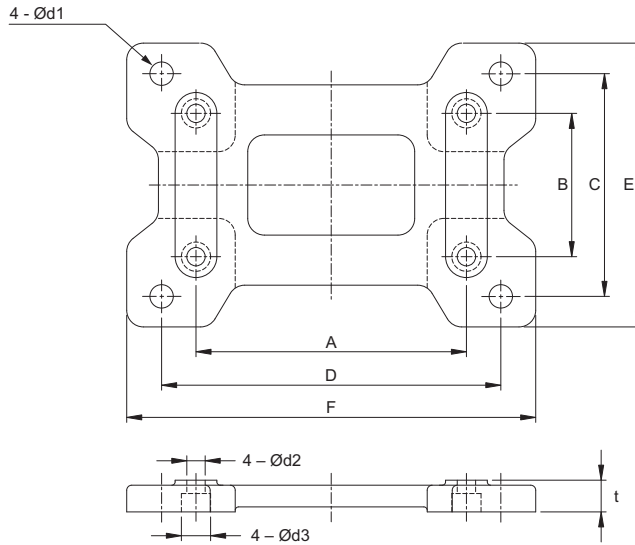

**BLANK
PAGE**

ALUMINUM WORM GEARBOXES



In This Chapter...

Gearbox Selection Factors	3-2
Service Factors and K Factors	3-2
IronHorse® Aluminum Worm Gearbox Specifications	3-3
IronHorse® Aluminum Worm Gearbox Dimensions	3-5
IronHorse® Aluminum Worm Gearbox Accessories	3-6



Gearbox Selection Factors

Service Factors and K Factors

Service Factors for Selecting Gearboxes (when used with electric motors)				
Service Continuity (per day)	Load Characteristics			
	Uniform	Moderate Shock*	Heavy Shock*	Extreme Shock*
Occasional 1/2 hour	1.00	1.00	1.00	1.25
Less than 3 hours	1.00	1.00	1.25	1.50
3-10 hours	1.00	1.25	1.50	1.75
More than 10 hours	1.25	1.50	1.75	2.00
* Shock results from sudden increases in the torque demand of the load, such as: sudden stopping, restarting, and/or reversing; significantly heavy loads dropped onto a moving conveyor; impact loads such as punch press operations.				
Depending upon the load characteristics, divide the gearbox HP, Overhung Load, and Maximum Mechanical Capacity ratings by the applicable service factor.				

Overhung Load K Factors for Various Drive Types	
Chain & Sprocket	1.00
Gear	1.25
V-belt	1.50
Flat Belt	2.50
Variable Pitch Belt	3.50
Divide gearbox OHL ratings by the applicable OHL K factors.	

IronHorse® Aluminum Worm Gearbox Specifications

IronHorse Aluminum Worm Gearbox Specifications – Frame Sizes 30, 40, 50 mm													
Part Number	Ratio	Output RPM @ 1750 rpm Input	Nominal Motor HP ¹ @ 1800 rpm	NEMA Motor Frame	Output Type ²	Center Distance ³ (mm)	Overhung Load ⁴ (lb)	Efficiency (%)	Approx Weight (lb)	Maximum Ratings @ 1750 rpm Input			Maximum Input Speed (rpm)
										Mechanical ⁵			
										Input Power (hp)	Output Power (hp)	Output Torque (lb-in)	
WGA-30M-010-H1	10:1	175	0.5	56C	H	30	142	80	3	0.54	0.43	150	2,000
WGA-30M-020-H1	20:1	88	0.25				179	72		0.30	0.22	150	
WGA-30M-030-H1	30:1	58	0.25				205	62		0.25	0.16	177	
WGA-30M-040-H1	40:1	44	0.2				225	55		0.19	0.10	150	
WGA-30M-060-H1	60:1	29	0.12				259	46		0.12	0.06	142	
WGA-40M-010-H1	10:1	175	1			40	279	83	5	1.15	0.95	354	
WGA-40M-020-H1	20:1	88	0.5				350	78		0.61	0.48	345	
WGA-40M-030-H1	30:1	58	0.5				403	68		0.53	0.36	389	
WGA-40M-040-H1	40:1	44	0.33				441	65		0.39	0.25	363	
WGA-40M-060-H1	60:1	29	0.25				507	56		0.25	0.14	319	
WGA-40M-080-H1	80:1	22	0.12				556	50		0.19	0.10	283	
WGA-40M-100-H1	100:1	17.5	0.12				595	47		0.15	0.07	257	
WGA-50M-010-H1	10:1	175	2				50	406		84	8	2.06	
WGA-50M-020-H1	20:1	88	1			510		78	1.13	0.88		646	
WGA-50M-030-H1	30:1	58	0.75			586		70	0.95	0.67		734	
WGA-50M-040-H1	40:1	44	0.75			643		65	0.70	0.46		664	
WGA-50M-060-H1	60:1	29	0.33			739		57	0.46	0.26		602	
WGA-50M-080-H1	80:1	22	0.33			810		50	0.38	0.19		566	
WGA-50M-100-H1	100:1	17.5	0.25			866		46	0.28	0.13		487	
1) Nominal Motor HP is the highest HP 1800 rpm motor to be used with the gearbox under conditions of 1.0 service factor. Gearbox input power capacity decreases as motor speed decreases and as service factor increases.													
2) Output Type: H = Hollow Bore.													
3) The Center Distance is the distance between the centerlines of the input and output shafts/bores; serves as the gearbox frame size.													
4) Overhung Load ratings are for forces perpendicular to the output shaft and located at the shaft midpoint, such as from a gear, pulley, or sprocket with a belt or chain. Divide OHL ratings by the applicable OHL K factors shown separately in the Selection Factors tables. OHL ratings should also be divided by applicable service factors.													
5) Maximum Mechanical Ratings are limits based on strength and durability of gearbox components; applicable when operating time is short and stopped time is greater than or equal to operating time. These ratings are applicable for 1.0 service factor loads, and may require modification depending upon characteristics of the applicable driven loads. Refer to the “Service Factors” table for more information.													

IronHorse® Aluminum Worm Gearbox Specifications (continued)

IronHorse Aluminum Worm Gearbox Specifications – Frame Sizes 63 & 75 mm												
Part Number	Ratio	Output RPM @ 1750 rpm Input	Nominal Motor Hp 1 @ 1800 rpm	NEMA Motor Frame	Output Type 2	Center Distance 3 (mm)	Overhung Load 4 (lb)	Efficiency (%)	Approx Weight (lb)	Maximum Ratings @ 1750 rpm Input		
										Mechanical 5		
										Input Power (hp)	Output Power (hp)	Output Torque (lb-in)
WGA-63M-010-H1	10:1	175	3	56C	H	63	510	86	13	3.67	3.16	1141
WGA-63M-010-H2	10:1	175	3	145TC			510	86		3.67	3.16	1141
WGA-63M-020-H1	20:1	88	2	56C			641	80		2.04	1.63	1186
WGA-63M-020-H2	20:1	88	2	145TC			641	80		2.04	1.63	1186
WGA-63M-030-H1	30:1	58	1.5	56C			736	73		1.76	1.28	1416
WGA-63M-040-H1	40:1	44	1	56C			807	70		1.26	0.88	1274
WGA-63M-060-H1	60:1	29	0.75	56C			928	59		0.86	0.51	1141
WGA-63M-080-H1	80:1	22	0.5	56C			1017	53		0.67	0.36	1071
WGA-63M-100-H1	100:1	18	0.5	56C			1088	48		0.57	0.27	1035
WGA-75M-010-H1	10:1	175	5	56C	H	75	604	86	19	5.44	4.68	1717
WGA-75M-010-H2	10:1	175	5	145TC			604	86		5.44	4.68	1717
WGA-75M-010-H3	10:1	175	5	182/4TC			604	86		5.44	4.68	1717
WGA-75M-020-H1	20:1	88	3	56C			759	79		3.14	2.48	1849
WGA-75M-020-H2	20:1	88	3	145TC			759	79		3.14	2.48	1849
WGA-75M-030-H1	30:1	58	2	56C			873	72		2.48	1.79	2026
WGA-75M-040-H1	40:1	44	1.5	56C			957	68		1.88	1.28	1947
WGA-75M-060-H1	60:1	29	1	56C			1099	62		1.26	0.78	1770
WGA-75M-080-H1	80:1	22	0.75	56C			1205	58		0.97	0.56	1672
WGA-75M-100-H1	100:1	18	0.75	56C			1289	52		0.80	0.42	1593

2,000

1) Nominal Motor HP is the highest HP 1800 rpm motor to be used with the gearbox under conditions of 1.0 service factor. Gearbox input power capacity decreases as motor speed decreases and as service factor increases.


2) Output Type: H = Hollow Bore.

3) The Center Distance is the distance between the centerlines of the input and output shafts/bores; serves as the gearbox frame size.

4) Overhung Load ratings are for forces perpendicular to the output shaft and located at the shaft midpoint, such as from a gear, pulley, or sprocket with a belt or chain. Divide OHL ratings by the applicable OHL K factors shown separately in the Selection Factors tables. OHL ratings should also be divided by applicable service factors.

5) Maximum Mechanical Ratings are limits based on strength and durability of gearbox components; applicable when operating time is short and stopped time is greater than or equal to operating time. These ratings are applicable for 1.0 service factor loads, and may require modification depending upon characteristics of the applicable driven loads. Refer to the "Service Factors" table for more information.

IronHorse® Aluminum Worm Gearbox Dimensions

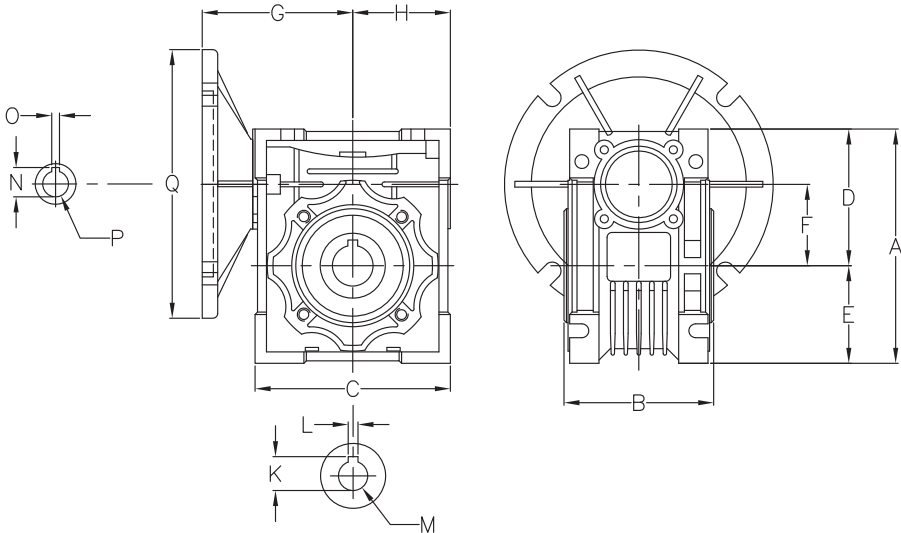

Dimensions (inches) – IronHorse Aluminum Worm Gearboxes															
Part Number	NEMA Motor Face	A	B	C	D	E	F	G	H	Output Bore			Input Shaft		
										K	L	ØM	N	O	ØP
WGA-30M-xxx-H1	56C	3.82	2.48	3.15	2.24	1.57	1.18	2.89	1.57	0.720	0.20	0.625	0.73	0.19	0.625
WGA-40M-xxx-H1		4.78	3.07	3.94	2.81	1.97	1.57	3.18	1.97	0.840	0.20	0.750	0.71	0.19	0.625
WGA-50M-xxx-H1		5.67	3.62	4.72	3.31	2.36	1.97	3.58	2.36	1.110	0.24	1.000	0.71	0.19	0.625
WGA-63M-xxx-H1		6.87	4.42	5.69	4.00	2.87	2.48	4.06	2.84	1.250	0.31	1.125	0.71	0.19	0.625
WGA-63M-xxx-H2	145TC	6.87	4.42	5.69	4.00	2.87	2.48	4.06	2.84	1.250	0.31	1.125	0.97	0.19	0.875
WGA-75M-xxx-H1	56C	8.07	4.72	6.77	4.69	3.39	2.95	4.68	3.39	1.375	0.31	1.250	0.71	0.19	0.625
WGA-75M-xxx-H2	145TC	8.07	4.72	6.77	4.69	3.39	2.95	4.68	3.39	1.375	0.31	1.250	1.24	0.25	1.125
WGA-75M-xxx-H3	182/4TC	8.07	4.72	6.77	4.69	3.39	2.95	4.68	3.39	1.375	0.31	1.250	1.24	0.25	1.125

See our website: www.AutomationDirect.com for complete Engineering drawings.

IronHorse® Aluminum Worm Gearbox Accessories

IronHorse Aluminum Worm Gearbox Accessories		
Part Number	Description	Typical Photo
WGA-30M-ACC1	Output flange, for aluminum WGA-30M series gearboxes. Includes (4) mounting screws.	
WGA-40M-ACC1	Output flange, for aluminum WGA-40M series gearboxes. Includes (4) mounting screws.	
WGA-50M-ACC1	Output flange, for aluminum WGA-50M series gearboxes. Includes (4) mounting screws.	
WGA-63M-ACC1	Output flange, for aluminum WGA-63M series gearboxes. Includes (8) mounting screws.	
WGA-75M-ACC1	Output flange, for aluminum WGA-75M series gearboxes. Includes (8) mounting screws.	
WGA-30M-ACC2	Torque arm, for aluminum WGA-30M series gearboxes. Includes (4) mounting screws.	
WGA-40M-ACC2	Torque arm, for aluminum WGA-40M series gearboxes. Includes (4) mounting screws.	
WGA-50M-ACC2	Torque arm, for aluminum WGA-50M series gearboxes. Includes (4) mounting screws.	
WGA-63M-ACC2	Torque arm, for aluminum WGA-63M series gearboxes. Includes (8) mounting screws.	
WGA-75M-ACC2	Torque arm, for aluminum WGA-75M series gearboxes. Includes (8) mounting screws.	
WGA-30M-ACC3	Single output shaft, Ø0.625 in, for aluminum WGA-30M series gearboxes. Includes (3) keys, (1) spacer, and (1) retaining ring.	
WGA-40M-ACC3	Single output shaft, Ø0.75 in, for aluminum WGA-40M series gearboxes. Includes (3) keys, (1) spacer, and (1) retaining ring.	
WGA-50M-ACC3	Single output shaft, Ø1.0 in, for aluminum WGA-50M series gearboxes. Includes (3) keys, (1) spacer, and (1) retaining ring.	
WGA-63M-ACC3	Single output shaft, Ø1.125 in, for aluminum WGA-63M series gearboxes. Includes (3) keys, (1) spacer, and (1) retaining ring.	
WGA-75M-ACC3	Single output shaft, Ø1.25 in, for aluminum WGA-75M series gearboxes. Includes (3) keys, (1) spacer, and (1) retaining ring.	
WGA-30M-ACC4	Double output shaft, Ø0.625 in, for aluminum WGA-30M series gearboxes. Includes (4) keys, (2) spacers, and (2) retaining rings.	
WGA-40M-ACC4	Double output shaft, Ø0.75 in, for aluminum WGA-40M series gearboxes. Includes (4) keys, (2) spacers, and (2) retaining rings.	
WGA-50M-ACC4	Double output shaft, Ø1.0 in, for aluminum WGA-50M series gearboxes. Includes (4) keys, (2) spacers, and (2) retaining rings.	
WGA-63M-ACC4	Double output shaft, Ø1.125 in, for aluminum WGA-63M series gearboxes. Includes (4) keys, (2) spacers, and (2) retaining rings.	
WGA-75M-ACC4	Double output shaft, Ø1.25 in, for aluminum WGA-75M series gearboxes. Includes (4) keys, (2) spacers, and (2) retaining rings.	
WGA-30M-ACC5	Output cover, for aluminum WGA-30M series gearboxes. Includes (4) mounting screws.	
WGA-40M-ACC5	Output cover, for aluminum WGA-40M series gearboxes. Includes (4) mounting screws.	
WGA-50M-ACC5	Output cover, for aluminum WGA-50M series gearboxes. Includes (4) mounting screws.	
WGA-63M-ACC5	Output cover, for aluminum WGA-63M series gearboxes. Includes (4) mounting screws.	
WGA-75M-ACC5	Output cover, for aluminum WGA-75M series gearboxes. Includes (4) mounting screws.	

INSTALLATION AND LUBRICATION



CHAPTER 4

In This Chapter...

IronHorse® Worm Gearbox Installation	4-2
Installation Instructions	4-2
Vent Plug Installation (Cast-Iron Gearboxes only)	4-3
IronHorse® Worm Gearbox Lubrication & Mounting Orientations ..	4-4
Lubrication Instructions	4-4
Lubricant Capacities & Mounting Orientations	4-5

IronHorse® Worm Gearbox Installation

Read these instructions thoroughly before installing or operating the gearbox.

Installation Instructions

- Leave the protective shaft sleeves in place for safe handling of the gearbox during installation.
- Add or partially drain oil as needed depending upon the mounting orientation.
(Refer to the lubrication section of this chapter for more information.)
- Install the vent plug.
(Not required for aluminum gearboxes; refer to the next subsection for more information.)
- Align all shafts accurately, since improper alignment can result in premature failure.
Use flexible couplings to compensate for slight misalignment.
- For hollow-bore output gearboxes – Use anti-seize compound when inserting the load shaft into the hollow output shaft. It is preferable to size the load shaft with sufficient length to allow complete insertion through the hollow output shaft of the gearbox. This allows equal support of the load shaft by both of the output shaft bearings, and permits the use of the output shaft setscrews to lock the two shafts together on both sides of the gearbox. At minimum, the load shaft should be inserted at least half way into the hollow output shaft, and secured with the setscrews on the insertion end of the gearbox.
- Mount the gearbox to a rigid foundation, and use the maximum possible bolt size. Periodically inspect the mounting bolts. (Do NOT mount gearbox vertically with input shaft pointing downward. Refer to the lubrication section of this chapter for allowable mounting orientations.)
- Optional gearbox and motor mounting bases are available for ease of mounting and alignment.
- Mount auxiliary drive components such as sprockets, gears and pulleys on the gearbox shaft as close to the housing as possible in order to minimize the effects of overhung loads. Avoid force fits that might damage bearings or gears.
- Check and record gear backlash at installation and again at regular intervals. This should be done by measuring the rotary movement of the output shaft, rotating the shaft alternately clockwise and counterclockwise at a suitable radius while holding the input shaft stationary. The gearbox should be replaced when the backlash exceeds four times the measurement taken at installation.
- Gear drives are rated for 1750 input rpm and Class I Service (Service Factor 1.0), using Mobil SHC634 synthetic lubricant.
- Initial operating temperatures may be higher than normal during the break-in period of the gear set. For maximum life, DO NOT ALLOW THE GEARBOX TO OPERATE CONTINUOUSLY ABOVE 225°F at the gear case. In the event of overheating, check for overloads or high ambient temperatures. Keep shafts and vent plugs clean to prevent foreign particles from entering seals or gear housing.

Vent Plug Installation – (Cast-Iron Gearboxes only)

All IronHorse Worm Gearboxes are tested and filled with Mobil SHC634 synthetic lubricant prior to shipment. All vent openings are plugged by the manufacturer to prevent the loss of lubricant in shipment. The vent plug is shipped loose in the package with cast-iron gearboxes, and should be installed prior to placing the gearbox in operation.

- The ventplug should be installed in the uppermost position.
(Use of a vent plug not necessary for aluminum gearboxes; vent plug not provided.)
- For all mounting positions where the vented plug is located in a horizontal plane, the vent hole must point upward.
- For all mounting positions where the vented plug is located in a vertical plane, the vent hole must point toward the center of the gearbox housing.
- Failure to properly install the vent plug can lead to pressurization of the gearbox housing as operating temperature rises, resulting in leakage at the shaft seals.

IronHorse® Worm Gearbox Lubrication & Mounting Orientations

Lubricant selection is important to all gearboxes, and it is particularly critical for the worm gear type. An oil with special characteristics and a relatively high viscosity is required due to sliding action between the gear teeth where they mesh. Aside from improper gearbox selection, inadequate lubrication is the greatest factor contributing to premature worm gearbox failures. Improper lubrication also causes reduced gearbox performance.

Lubrication Instructions

IronHorse Worm Gearboxes are shipped to you filled with Mobil SHC634 synthetic oil. Oil must be added or partially drained depending upon your mounting orientation, as shown in the Lubricant Capacities table.

Since many oils are not suitable for worm gears, it is very important to use the proper lubricant type. It is also very important to keep the oil free from oxidation and contamination by water or debris. For longer service life, the gearbox should be periodically drained (preferably while warm) and refilled to the proper level with a recommended gear oil. Non-synthetic oils should be changed every 6 months or 250 hours of operation under normal operating conditions. However, synthetic lubricants have increased resistance to thermal and oxidation degradation, and do not need to be changed as frequently.

Synthetic lubricant should be changed every 6,000 hours of operation or every two years, whichever comes first.



WARNING: Some lubricants contain non-corrosive extreme pressure additives. **DO NOT USE** lubricants that contain sulphur and/or chlorine, which are corrosive to bronze gears. Also, some extreme pressure lubricants contain materials that are toxic. Avoid the use of these lubricants where harmful effects can occur.

Lubricant Capacities & Mounting Orientations



WARNING: Too much oil will cause overheating, and too little oil will result in gear failure. Check oil level regularly. More frequent oil changes are recommended when operating continuously, at high temperatures, or under conditions of extreme dirt or dust.

IronHorse Aluminum Worm Gearbox Lubricant Capacities					
Gearbox Mounting Orientation	A	B	C	D	E
Gearbox Part Number	Approx Capacity (fl oz)				
WGA-30M-xxx-xx	1.69				
WGA-40M-xxx-xx	3.38				
WGA-50M-xxx-xx	5.07				
WGA-63M-xxx-xx	10.14				
WGA-75M-xxx-xx	16.91				

IronHorse Cast-Iron Worm Gearbox Lubricant Capacities					
Gearbox Mounting Orientation	A*	B	C	D	E
Gearbox Part Number	Approx Capacity* (fl oz)				
WG-175-xxx-x	11.64	18.74	18.74	17.24	15.14
WG-206-xxx-x	19.41	28.41	28.41	26.71	21.81
WG-237-xxx-x	24.07	35.17	35.17	33.77	29.67
WG-262-xxx-x	34.55	48.25	48.25	45.85	41.05
*Gearboxes are shipped filled with oil sufficient for mounting orientation "A". Oil must be added to gearboxes installed in other mounting orientations.					

Gearbox Mounting Orientations					
Horizontal Input Shaft				Vertical Input Shaft	
A	B	C	D	E	not allowed

**BLANK
PAGE**

GLOSSARY OF TERMS



In This Appendix...

Glossary of Gearbox TermsA-2
----------------------------------	-----------------

Glossary of Gearbox Terms

Axial Movement

Often called “endplay.” The endwise movement of motor or gear shafts. Usually expressed in thousandths of an inch.

Back Driving

Driving the output shaft of a gearbox to increase speed rather than reduce speed. Worm gearboxes are not suitable for service to increase speed.

Backlash

Rotational movement of the output shaft clockwise and counter clockwise, while holding the input shaft stationary. Usually expressed in thousandths of an inch and measured at a specific radius at the output shaft.

Center Distance

A basic measurement or size reference for worm gearboxes. The distance between the centerlines of the input and output shafts.

Efficiency

A ratio of the input power compared to the output power, usually expressed as a percentage.

Flanged Reducer

Usually used to refer to a gearbox having provisions for close coupling of a motor either via a hollow (quill) shaft or flexible coupling. Most often a NEMA C-face motor is used.

Gearbox

Also called a Speed Reducer. An enclosed set of gears used in mechanical power transmission to reduce speed and increase torque.

Input Power

The power applied to the input shaft of a gearbox. There are separate ratings for Mechanical Input Power, Thermal Input Power, and Nominal Motor Horsepower.

K Factor

Also called an Overhung Load Factor. A constant used to modify the overhung load rating of a gearbox based on the type of load applied on the shaft. Use the K factor either to increase the calculated overhung load, or to reduce the gearbox overhung load rating.

Mechanical Ratings

The maximum power or torque a gearbox can transmit based on the strength and durability of its components. Some applications require the gearbox Mechanical Ratings to be reduced by a Service Factor.

Mounting Position

The relationship of the input and output shafts of a gearbox relative to horizontal.

Nominal Motor Horsepower

The highest horsepower 1800 rpm motor that can be used with the gearbox under 1.0 service factor conditions. This rating decreases as the motor speed decreases, and as the service factor increases.

Output Horsepower

The amount of horsepower available at the output shaft of a gearbox. Output horsepower is always less than the input horsepower due to the efficiency of the gearbox.

Overhung Load

A force applied at right angles to a shaft beyond its outermost bearing. This shaft-bending load must be supported by the bearing. Overhung load ratings are listed for each gearbox size, and should not be exceeded. Some applications require the gearbox Overhung Load rating to be reduced by a K Factor and/or a Service Factor.

Overhung Load Factor

K Factor.

Prime Mover

In industry, the prime mover is most often an electric motor. Occasionally engines, hydraulic or air motors are used. Special considerations are called for when other than an electric motor is the prime mover.

Self-Locking

The inability of a reducer to be driven backwards by its load. No IronHorse worm gearbox should be considered self-locking.

Service Factor (for gearbox)

A constant used to modify the Mechanical Rating of a gearbox based on the duration of service and characteristics of the driven load. Use the Service Factor either as a multiplier to increase the calculated loads, or as a divisor to reduce the gearbox Mechanical and Overhung Load ratings.

Service Factor (for motors)

Refers to a motor's ability to handle a load greater than the motor's rated horsepower on a continuous basis.

Speed Reducer

Gearbox.

Thermal Ratings

The power or torque a gearbox can transmit continuously. These ratings are based upon the cast-iron gearbox's ability to dissipate the heat caused by friction. (Not applicable for aluminum-frame gearboxes, due to their inherently better ability to dissipate heat.)

Thrust Load

Forces along the axis of the output shaft, usually encountered in vertical-drive applications.

Worm Gear

A set of threads, similar to a thread screw, that advance as they rotate around their axis. The advancing threads cause the mating gear to turn, and also slide against the gear teeth.

**BLANK
PAGE**

GEARBOX SELECTION



In This Appendix...

Gearbox Selection ProcedureB-2
Gearbox Selection StepsB-2
Gearbox Selection ExampleB-2

Gearbox Selection Procedure

Gearbox Selection Steps

- 1) Determine the torque and speed required for the load.
- 2) Determine the overall speed ratio of motor speed to load speed.
- 3) Determine the gearbox ratio as well as any reduction outside the gearbox (pulleys, gears, etc.).
- 4) Determine the applicable service factor and overhung load K factor.
- 5) Determine the gearbox real output torque required, and select a gearbox with a higher Maximum Thermal output Torque rating (for WG cast-iron gearboxes; not applicable for WGA aluminum gearboxes).
- 6) Determine the gearbox design output torque required (torque with service factor applied), and select a gearbox with a higher Maximum Mechanical Output Torque rating. (Gearbox must also meet requirement #5.)
- 7) Determine the required sizes of pulleys, gears, etc., and determine the overhung load force. Select a gearbox with a higher Overhung Load rating. (Gearbox must also meet requirements #5 & #6.)
- 8) Confirm that the selected gearbox meets the applicable system requirements.
- 9) Select a compatible motor.

Gearbox Selection Example

(Refer to the specifications tables for gearbox specifications, service factors, and K factors.)

A conveyor will run 10 hours/day with moderate shock loading. The conveyor will be driven by a V-belt and needs to be driven at approximately 20 rpm. The motor to be used will have a nominal speed of 1800 rpm (1725 rpm actual speed). The conveyor will require 2700 in-lb of torque.

- 1) Required **torque** = 2700 in-lb; required **speed** = 20 rpm.
- 2) Determine the **overall speed ratio** of motor speed to load speed:
Overall speed ratio = motor speed / load speed = $1725 / 20 = 86.25$ [about 86:1]
- 3) Determine pulley ratios at available gearbox ratios:
Gearbox ratio = (overall speed ratio) / (pulley ratio)
Pulley ratio = (overall speed ratio) / (gearbox ratio)

For 5:1 gearbox:	pulley ratio = $86.25 / 5 = \text{17.25}$ [17.25" pulley size is prohibitively large]
For 10:1 gearbox:	pulley ratio = $86.25 / 10 = 8.63$
For 15:1 gearbox:	pulley ratio = $86.25 / 15 = 5.75$
For 20:1 gearbox:	pulley ratio = $86.25 / 20 = 4.31$
For 30:1 gearbox:	pulley ratio = $86.25 / 30 = 2.88$
For 40:1 gearbox:	pulley ratio = $86.25 / 40 = 2.16$
For 60:1 gearbox:	pulley ratio = $86.25 / 60 = 1.44$
For 80:1 gearbox:	pulley ratio = $86.25 / 80 = 1.08$

Pulley ratio = (conveyor pulley diameter) / (gearbox pulley diameter)

- 4) Determine **service factor (SF)** and **overhung load factor (K)** from applicable tables:

SF = 1.25 due to moderate shock loading and 3-10 hours/day operation

K = 1.5 due to V-belt

- 5) Use specifications table to select gearbox with **Max Thermal* Torque rating > required real torque:**

Gearbox required real torque = (final torque) / (pulley ratio)

For 10:1 gearbox: (2700 in·lb) / 8.63 = 312.86 in·lb; use WG-175-x or larger

For 15:1 gearbox: (2700 in·lb) / 5.75 = 469.57 in·lb; use WG-175-x or larger

For 20:1 gearbox: (2700 in·lb) / 4.31 = 626.45 in·lb; use WG-206-x or larger

For 30:1 gearbox: (2700 in·lb) / 2.88 = 937.50 in·lb; use WGA-63M* or larger

For ~~40:1 gearbox~~: (2700 in·lb) / 2.16 = 1250.0 in·lb; none applicable

For ~~60:1 gearbox~~: (2700 in·lb) / 1.44 = 1875.0 in·lb; none applicable

For ~~80:1 gearbox~~: (2700 in·lb) / 1.08 = 2500.0 in·lb; none applicable

** Aluminum gearboxes do not have thermal ratings; use mechanical ratings.*

- 6) Use specifications table to select gearbox with Max Mechanical Torque rating > required design torque:

Gearbox required design torque = (real gearbox torque)(service factor)

For 10:1 gearbox: (312.86 in·lb)(1.25) = 391.08 in·lb; use WG-175-x or larger

For 15:1 gearbox: (469.57 in·lb)(1.25) = 586.96 in·lb; use WG-206-x or larger

For 20:1 gearbox: (626.45 in·lb)(1.25) = 782.56 in·lb; use WG-206-x or larger

For 30:1 gearbox: (937.50 in·lb)(1.25) = 1171.88 in·lb; use WGA-63M or larger

- 7) Use the gearbox overhung load ratings from the specifications table to determine the minimum allowable pulley diameters. Select gearbox with **Overhung Load rating > overhung load force:**

Gearbox required OHL rating = (gearbox real torque)(K)(SF)/(gearbox pulley diameter / 2)

Minimum gearbox pulley diameter = (T)(K)(SF)(2)/(OHL rating)

Conveyor pulley diameter = (gearbox pulley diameter)(pulley ratio)

For 10:1, WG-175-010-x gearbox:

Minimum gearbox pulley diameter = (312.86 in·lb)(1.5)(1.25)(2)/(650 lb) = 1.8" [use 2"]

Conveyor pulley diameter = (2")(8.63) = ~~17.26"~~ [17.26" pulley size is prohibitively large]

Determine pulley sizes and OHL for next larger gearbox ratio.

For 15:1, WG-206-015-x gearbox:

Minimum gearbox pulley diameter = (469.57 in·lb)(1.5)(1.25)(2)/(700 lb) = 2.5" [use 2.5"]

Conveyor pulley diameter = (2.5")(5.75) = 14.38" [use 14.4"]

Select **WG-206-015-x gearbox, 2.5" gearbox pulley, and 14.4" conveyor pulley.**

For 20:1, WG-206-020-x gearbox:

N/A – All gearboxes of the same frame size are the same price, yet the smaller ratio gearboxes offer higher efficiency and power characteristics than higher ratio gearboxes. Therefore, the WG-206-015-x gearbox is preferable over the WG-206-020-x gearbox for this application.

For 30:1, WGA-63M-030-H1 gearbox:

Minimum gearbox pulley diameter = (937.50 in·lb)(1.5)(1.25)(2)/(736 lb) = 4.78" [use 5"]

Conveyor pulley diameter = (5")(2.88) = 14.40" [use 14.4"]

N/A – WGA-63M gearbox costs more than WG-206

Appendix B: Gearbox Selection

8) **Check results** against original speed and torque requirements:

- a) Conveyor speed = (motor speed) / (gearbox ratio)(pulley ratio)
= (1725 rpm) / (15)(14.4"/2.5") = 20 rpm
- b) Maximum real torque available at conveyor = (gearbox thermal torque)(pulley ratio)
= (673 in·lb)(14.4"/2.5") = 3876 in·lb
- c) Maximum design torque available at conveyor
= (gearbox mechanical torque)(pulley ratio) / (service factor)
= (1002 in·lb)(14.4"/2.5") / 1.25 = 4617 in·lb

The speed is correct as required, and both maximum torque values are greater than the 2700 in·lb required by the load.

9) **Select a motor** and check torque transmitted to the load:

From the gearbox spec tables, WG-206-015-x efficiency = 85%.

maximum thermal input power = 1.40 hp

maximum mechanical input power @ 1.0 SF = 2.09 hp

maximum mechanical input power @ 1.25 SF

$$= (\text{rated max mechanical input power}) / (\text{SF}) = 2.09 \text{ hp} / 1.25 = 1.67 \text{ hp}$$

maximum allowable motor power = 1.40 hp; select nominal 1hp motor

Select **1hp motor**, and check for adequate torque at the load:

Torque = Power / Speed

[conversion factor: (1hp) = (63,025 in·lb·rpm)]

Torque_{load} =

$$\begin{aligned} & (63,025 \text{ in·lb·rpm/hp})(\text{gearbox input hp})(\text{gearbox efficiency}) / (\text{motor rpm} / (\text{gearbox ratio})(\text{pulley ratio})) \\ & = (63,025)(1)(0.85) / (1725 / (15/1)(14.4/2.5)) = \text{2683 in·lb} \text{ [insufficient torque at load]} \end{aligned}$$

This torque value is less than the 2700 in·lb required by the load.

So, select and check the next larger nominal motor size, which is 1-1/2 hp.

Since the 206 frame size, 15-ratio gearbox does not meet the required 1-1/2 hp thermal rating, choose the WG-237-015-x gearbox.

Select **1-1/2 hp motor** and **WG-237-015-x gearbox**, and check for adequate torque:

WG-237-015-x gearbox efficiency = 84%

maximum thermal input power = 1.55 hp

maximum mechanical input power @ 1.25 SF = 2.64 hp / 1.25 = 2.11 hp

maximum allowable motor power = 1.55 hp; nominal 1-1/2 hp motor

gearbox ratio is still 15:1, and OHL rating is increased to 900 lb,

so the previous pulley calculations [step 7] remain sufficient

[smaller pulleys can be calculated and selected for this gearbox, if desired]

Torque = Power / Speed

[conversion factor: (1hp) = (63,025 in·lb·rpm)]

$$T_{\text{load}} = (63,025 \text{ in·lb·rpm/hp})(1.5\text{hp})(84\%) / (1725 \text{ rpm} / (15/1)(14.4/2.5))$$

$$= 3977 \text{ in·lb} > 2700 \text{ in·lb; sufficient torque at load}$$

Final gearbox and motor selection: 1-1/2 hp motor WG-237-015-x gearbox

**BLANK
PAGE**



IronHorse® Worm Gearbox User Manual
IH-WG-USER-M-WO
3rd Edition