
INSTALLATION INSTRUCTIONS

TRUSS SPANNING ADAPTER

CMA-366 

The bracket is a universal method for quick, easy installation of NPT 1½” pipe to or above a variety of structures. By using any length of standard NPT 1½” pipe threaded both ends, you can extend the height capabilities to meet your needs.

WARNING: IMPROPER INSTALLATION MAY RESULT IN SERIOUS PERSONAL INJURY!

When mounting Chief Manufacturing accessories, the structural system and mounting method **MUST** be capable of supporting 5 times the combined weight of the total installation.

The maximum weight to be installed on the truss spanning adapter is 250 pounds (113.4Kg).

Unpack and check contents:

- | | |
|-----------------------------|--------------------------|
| (1) PLATE, truss hang down | (4) NUT, Nylock 3/8-16 |
| (1) PLATE, ceiling, 4” X 4” | (12) WASHER, flat, 3/8” |
| (2) CLAMP, U, 2” pipe | (1) SETSCREW, 10-24 X ¼” |
| (4) BOLT, hex, 3/8-16 x 1” | (1) WRENCH, Allen, 3/32” |
| (4) BOLT, hex, 3/8-16 x 2” | |

1. Secure the hang down truss plate to a structural member (see Figure 1) in the desired location using two clamps, four 3/8-16 X 2” bolts, and four 3/8” flat washers (**SEE WARNING ABOVE**).
2. Secure the ceiling plate to the truss in the desired location using four 3/8-16 X 1” bolts, four 3/8-16 Nylock nuts, and four 3/8” flat washers.
3. Install NPT 1½” pipe and secure using 10-24 X ¼” setscrew.

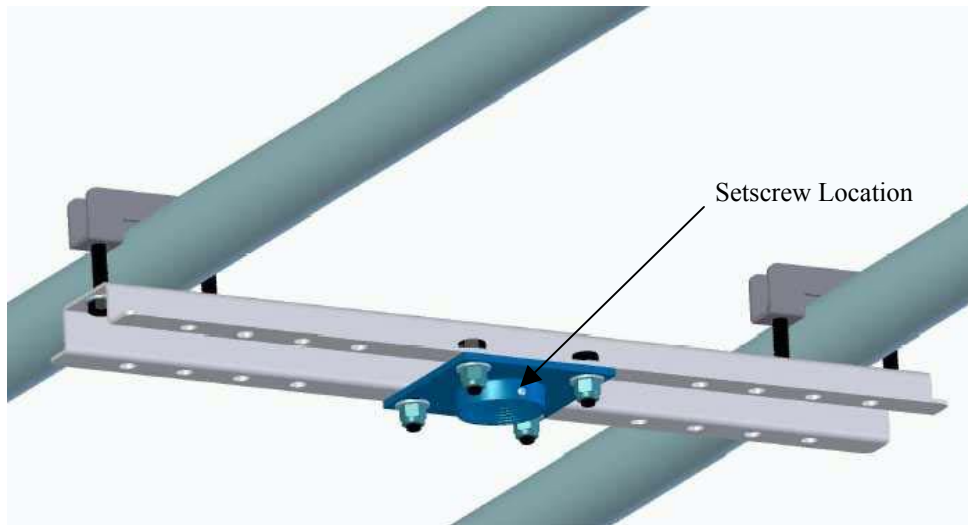


Figure 1. CMA-366



CHIEF MANUFACTURING INC.
1-800-582-6480 952-894-6280 FAX 952-894-6918
12800 HIGHWAY 13 SOUTH, SUITE 500
SAVAGE, MINNESOTA 55378 USA

8803-000024
2003 Chief Manufacturing
www.chiefmfg.com
06/03