GSM Cell Phone Watch

User Manual

(Version 07.12)



Nuo Zhou Technology Limited

nuozhoutech@hotmail.com

Friendly Tips

Thank you for choosing Nuozhou product! This GSM cell phone watch is a great gift idea this holiday buying season. Your customers can give them to their families and friends!
It sports a fashionable and innovative design; highly sensitive touch screen; GSM 900/1800 MHz Dual band; MP3/MP4 playback function; Stereo Bluetooth headset included!

This manual is used for introducing GSM Cell phone watch. If description, photographs and actual products are nuances, please practical products. For further notice, please contact with our distributors or contact us via email address: nuozhoutech@hotmail.com

Index

		Page
1.	**Basics**	
	1.1 Brief	4
	1.2 Safety alert and notice	4
2.	**Your mobile phone**	
	2.1 Unpack	5
	2.2 Basic specifications	6
	2.3 Components	7
	2.4 Key pad	9
3.	**Preparations before Get Started**	
	3.1 Insert SIM cards	10
	3.2 Install a battery	10
	3.3 Charging	11
	3.4 Assemble the watch band or strap headset	11
	3.5 Power on and turn off	12
	3.6 Unlock keyboard and touch screen	12
	3.7 Calibrate the touch screen	12
4.	**Basic Functions**	
	4.1 Making a call	12
	4.2 Answering a call	12
	4.3 Aborting a call	12
	4.4 Input text	12
5.	**Menu Guide**	
	5.0 Entering, exiting and exploring the menu	13
	5.1 Phone book	14
	5.2 Messages	16
	5.3 Call History	17
	5.4 Settings	18
	5.5 Multimedia	22
	5.6 File Manager	24
	5.7 Fun & Games	24
	5.8 User Profiles	24
	5.9 Organizer	24
	5.10 Services	25
	5.12 Shortcuts	26

1. Basics

1.1 Brief

To let your mobile phone be used in good condition, please read this manual carefully.

1.2 Safety alert and notice

1.2.1 Mobile phone taboos

Please do not use your phone when driving. If you have inevitable call, please use hands-free accessories. Please notice that it is illegal in some countries to having calls when driving.

Please power off your mobile phone or switch to flight mode during flight. Using mobile phone on plane is illegal and dangerous.

Please power off your mobile phone within dangerous area such as gas station, oil and digging plant, chemical plant or explosion spot, please abide by relevant law or rules.

Please power off you mobile phone at other phone taboo places or any places may cause interference or danger, such as hospital.

1.2.2 Battery use

Only use the original batteries approved by suppliers.

Use the batteries carefully. Connect positive pole and negative pole with metal may cause short circuit and damage the battery.

Do not throw battery into fire and put it at very hot position.

Do not disassemble and refit battery.

Put battery at cool and dry places, never put at hot places over 55℃.

Please stop using battery if there is over heating, odd smell, or any abnormal shape transformation.

If you do not use battery for a long time, please charge the battery fully and take it out of the phone before store it.

Please put wasted batteries at appointed public battery reclaim area.

1.2.3 Carefully use your mobile phone

Do not touch your screen with sharp objects and keep screen clean. Never use a touch pen if it is damaged.

Put your mobile phone and other accessories away from high temperature, rain, moisture, and eroding liquid.

Do not use caustic chemical or cleanser or scour to clean your mobile phone.

1.2.4 Your mobile phone can be only maintained by professionals. Self maintaining may cause danger, and against guarantee regulations.

1.2.5 Please put your mobile phone at places where little child can not touch.

2. Your mobile phone

2.1 Unpack

Make sure you have each item. Please confirm that the following items intact; if missing, please contact with the local dealers.

Mobile Phone x 1
Touch pen x 1
Lithium Battery x 2
Strap Headset x 1
Data transfer cable x 1
Watch band x 1
Mobile phone User Manual CD-Rom x 1
Bluetooth headset x 1
Bluetooth headset User Manual x 1
Bluetooth headset Charger cable x 1
Charger x 1 (two flat pins, AC 110V-240V input)

2.2 Basic specifications

Item	Specification
Dimension	64mm(L) x 45mm(W) x 18mm(H)
Weight	60g (Battery not included)
Screen	1.3 inch, 128 x 160 pixels, 260K color, TFT
Build in Storage	64 MB
Ext. Storage	Not available
Battery	Material: Li-on
	Capacity: 650mAH
	Standard output voltage: 3.7V
	Charging limit voltage: 4.2V
	Talk time: 120 Minutes
	Standby time: 60 Hours
	Working temperature: -10℃ ～ 55℃

Notes:
Battery standby time and standby time will be affected by the network and using environment.

2.3 Components

Front Side



Left Side



Right Side



Back Side



2.4 Key pad

Virtual Key pad



Touch this icon under standby interface to Call out the Virtual Keyboard

Virtual Key pad



*Numbers / * / # Keys*


Phone book

Send


3. Preparations before Get Started

3.1 Insert a SIM card

1

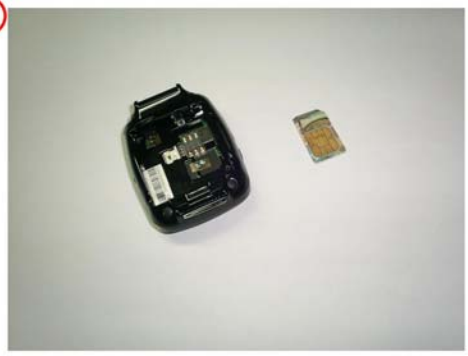

2

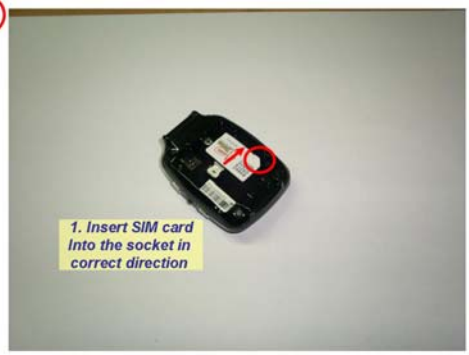

3



3.2 Install a battery

1



2



3



3.3 Charging

1



2



3




4



5



3.4 Assemble the watch band or strap headset

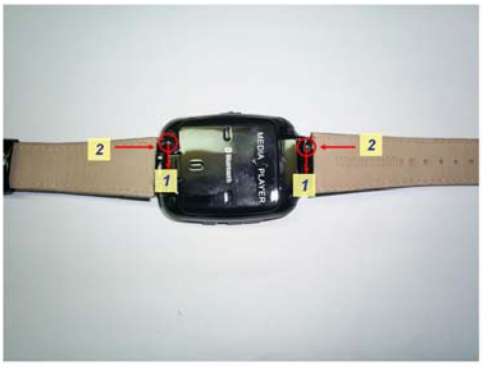



3.5 Power on and turn off

Press and hold Red key for 5 seconds to power on / turn off your phone.

3.6 Unlock touch screen.

According to your customized setting, the phone may automatically lock the touch screen to avoid operation by accident. To unlock, fast press Send key and then touch the screen center point.

3.7 Calibrate the touch screen

Important Notice: First time use the mobile phone, you need to calibrate the touch screen. Go to [Main Menu / Settings / Pen Calibration]; follow the system's instructions to finish it.

4. Basic Functions

4.1 Making a call

Call out the virtual key pad, input destination telephone number, then press Send Key.

4.2 Answering a call

When there is a call incoming, press Send Key to answer the call.
To refuse the incoming call, press Red Key.

4.3 Aborting a call

Any time you want to abort a call, press Red Key to abort.

4.4 Input text

There are many occasions you need to input text, such as SMS edit / Phone book entry edit / Create Tasks, etc.
At the text input interface, you can use touch screen virtual keyboard to input text.

You may want to:

(1) Set up default Input method:


Go to [Settings / Phone setup / Preferred Input Method/], set the input method

you prefer as the default. It will be effective each time you need to input a text.

(2) Change Input methods in the text edit interface:

In the text edit interface, you can change the input methods by touching the middle bottom icon.

(3) Input text:

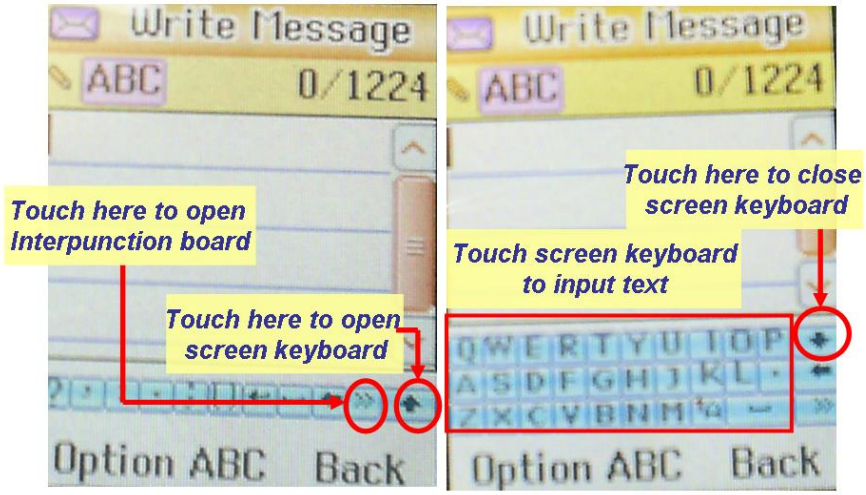

5. Menu Guide

5.0 Entering, exiting and exploring the menu



To enter the main menu, press “Left soft Key” in standby status.
To exit the menu and back to standby status, press “Red Key”.
To explore the whole menu, use touch screen to select icons to enter sub menu or press Right soft key to be back to upper menu.

5.1 Phone book

5.1.1 Quick Search

You can directly view the stored phone book entries with phone numbers indicated.
When you find the entry, you can directly make a call by pressing Send Key, or you can touch “Option” on touch screen, to get further options:

(1) IP Dial: Call the chosen number using IP pre-dial. (You can select [Settings / Call Setup / IP number / Option] to set your IP pre-dial number and activate it.)

(2) View: View the detail information of selected entry.

(3) Edit: Edit the detail information of selected entry.

(4) Delete: Delete the selected entry.

(5) Copy: Copy the selected entry to phone storage or SIM card storage.

(6) Move: Move the selected entry to phone storage or SIM card storage.

(7) Duplicate: Duplicate the selected entry in the phone storage or in the SIM card storage.

(8) Send vCard: Send entries in vCard format by SMS/MMS/Bluetooth or save it to a file.

5.1.2 Search Entry

Here you can input the name to search. After find the right item, press the “Option” or click touch screen, you will get a same menu as 5.2.1.

5.1.3 Add New Entry

Here select the storage space you want to use: SIM card , or Phone. Then you can edit and add the new entry.

5.1.4 Copy All

(1) From SIM: To copy all phone book entries from SIM card to the phone.
(2) From Phone: To copy all phone book entries form phone to SIM card.

5.1.5 Delete

1. “From SIM”/2. “From Phone”: You will be asked to input phone password (you can select [Settings / Security Setup / Change Password] to change and set the password), then you can delete the whole phone book list stored in the SIM card or in the phone.
3. “One by one”: You can delete all telephone book entries stored in SIM card and Phone.

5.1.6 Caller Group

You can sort and manage your phone book entries by adding them into different groups.
Select one group and press “OK”, you can edit call group details: Group Name, Group Calling Ring tone, Calling Picture, and add member list.

5.1.7 Extra Number

Indicate SIM card’s owner number and service dial number information.

5.1.8 Settings

(1) Memory Status: Show the storage status of both SIM cards and phone.
(2) Preferred Storage: Let you choose the default storage place. You can choose SIM card or phone.
(3) Fields: Turn on / off the information items of phone book entries.
(4) My vCard: Edit / Send your vCard yourself.

5.1.9 Caller Picture

You can select a picture here and allocate it to a new entry / selected entry / caller group.

5.1.10 Caller Ring Tone

You can select a ring tong here and allocate it to a new entry / selected entry / caller group.

5.2 Messages

5.2.1 SMS

(1) Inbox

Here you can browse and read received SMS messages.

(2) Outbox

Here you can find the saved SMS drafts.

(3) Write Message

Here you can edit SMS text and send them out or save the drafts.

(4) Template

Here you can edit the text template; you can save up to 10 template entries.

(5) Message Settings

Here you can edit the SMS profile settings, please contact your network service provider before changing the settings under this menu.

5.2.2 MMS

(1) Write message

Here you can create a new MMS by inputting “To number” / “CC number” / “BCC number” / “Subject” / “Edit content”, and then send it out or save the draft.

(2) Inbox

Here you can browse and read received MMS messages.

(3) Outbox

Here you can find the sent MMS messages.

(4) Drafts

Here you can find the saved MMS drafts.

(5) Template

Here you can find and uses 5 MMS templates.

(6) Message Settings

Here you can edit the MMS profile settings, for some network functions, please contact your network service provider before changing the settings under this menu.

5.2.3 Chat

Chat function allows you to chat with several friends in two virtual chatting rooms. This function needs your local service provider’s network support. Please contact them for further assistance.

5.2.4 Voice Mail Server

Here you can set up two voice mail server profiles and connect both servers for voice mail services.

5.2.5 Broadcast Messages

Here you can edit Broadcast channel list and read broadcast messages.

5.3 Call History

5.3.1 Missed Calls

Here you can view all missed calls details.
You can call back the numbers and you can also save, edit, or delete the number in the option menu.

5.3.2 Dialed Calls

Here you can view all Dialed calls details.

5.3.3 Received Calls

Here you can view all Received calls details.

5.3.4 Delete Call log

Here you can delete call log.

5.3.5 Call Time

Here you can view the Last call time, Total sent / Total Received call time, and also you can reset all time counters.

5.3.6 SMS Counter

5.3.7 GPRS Counter

5.4 Settings

5.4.1 Pen Calibration

If this is the first time you use the mobile phone, or it has been a long time the screen hasn't been calibrated, you need to (re-)calibrate the touch screen.
Go to [Main Menu / Settings / Pen Calibration]; follow the system's instructions to finish it.

5.4.2 Phone Setup

(1) Time and Date

Here your can set your Home city / Time / Date / Time and Date Format

(2) Schedule Power On/Off

Here you can set your phone Power on / off according to your schedule.

(3) Language

Here you can set the interface language.

(4) Preferred Input Method

Here you can set your preferred input method.

(5) Display Characteristic

Here you can set Wallpaper image / Screen saver image / Power on display animation / Power off display animation / whether show Date and Time / whether show owner number / whether show date and time / whether show

owner number / whether show network operator name /

(6) Greeting Text

Here you can set whether display power on greeting text and edit the text contents.

(7) Dedicated key

Here you can allocate certain applications shortcuts to four direction keys. Then at standby interface, you can enter certain application by simply press four direction keys.

(8) Auto update of date and time

This function allows you to auto synchronize phone system's date and time with network. This function needs your local service provider's network support.

(9) Flight Mode

You can switch your phone into Normal mode / Flight mode or chose to be queried before power on. If you are on the flight, you can switch your phone into flight mode, and then you can turn off network radio and use all other functions on the flight.

(10) Handwriting

Here you can set up the touch pen sensor speed and ink color.

(11) Misc Setting

Here you can set up the LCD back light brightness and lasting time.

5.4.3 Call Setup

(1) Caller ID

You can choose to send or hide your Id when making a call, or set by network. This function needs your local service provider's network support.

(2) Call Waiting

Here your can set to activate / deactivate / Query status of your call waiting status.
This function needs your local service provider’s network support.

(3) Call Divert

Here you can set to Divert all voice calls / Divert if unreachable / Divert if no answer / Divert if Busy / Divert all data calls / Cancel all divert according to your needs.
This function needs your local service provider’s network support.

(4) Call Barring

Here you can set Call barring for all outgoing calls / incoming calls / Cancel all barring / change barring password.

(5) Line Switching

Here you can switch to use Line 1 / Line 2 of SIM card.
This function needs your local service provider’s network support.

(6) Call Time Reminder

Here you can turn on / off call time reminder, if you turn on it, you will hear warning sound at the end of each minute during each call.

(7) Call Time Display

Turn on / off Call time display.

(8) Auto Redial

Turn on / off Auto Redial.
This function needs your local service provider’s network support.

(9) Closed User Group

Turn on / off call group function.

(10) IP Number

Here you can set three IP pre-dial numbers, then you can use them on [Phone

book entry / Option / IP dial, the phone will automatically add the IP pre-dial numbers before phone numbers.
This function may great be helpful for you to use IP telephone services.
This function needs your IP telephone service provider’s support.

5.4.4 Network Setup

(1) Network selection

Set to log onto a network Automatically / By manual.

(2) Preferred Networks

Set your preferred networks, system will automatically log onto the selected network in priority.

(3) GPRS connection

Set to use GPRS connection Always / When needed.

5.4.5 Security Setup

(1) SIM lock

Lock / Unlock SIM card. A PIN code is needed, you need to contact local service provider to get the PIN code.

(2) Phone lock

Lock / Unlock your phone. A phone password is needed. The initial phone password is 1122; please change the password to your own one as soon as possible.

(3) Auto Keypad lock

Set turn on / turn off /time to auto lock the keypad.
(4) Fixed Dial

Set the fixed dial number list of SIM card. A PIN2 code is needed, you need to contact local service provider to get the PIN2 code.

(5) Barred Dial

Set the barred dial number list of SIM card.
This function needs your local service provider’s network support.

(6) Change Password

Change the phone password.

5.4.6 Restore Factory Setting

Restore all application and data back to factory setting. A phone password is needed.
Important notice: All user data will be erased after restore factory setting.


5.4.7 Sound Effect

Choose the Equalizer style of music player.

5.5 Multimedia

5.5.1 Video Player
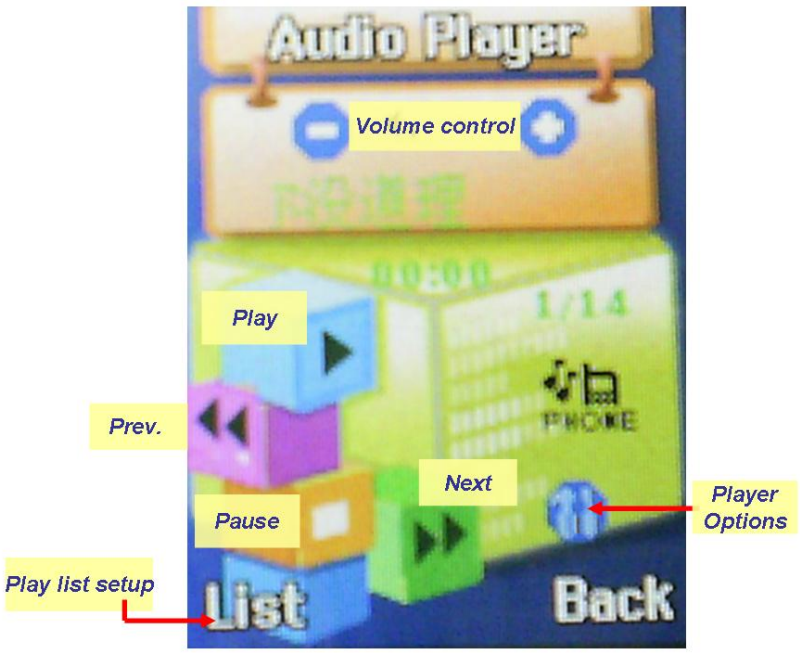
Video Player support MP4 / 3gp format video files playback.
Video player operation interface

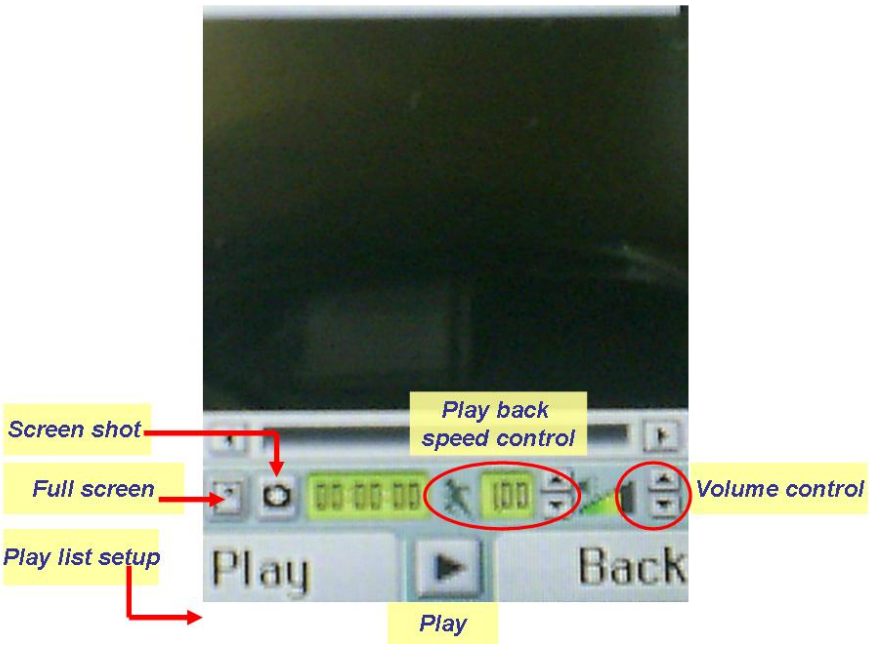

Default Video file storage path: **[Phone root / Video]**
Default video screen shot file storage path: **[Phone root / Photos]**

5.5.2 Audio Player

Audio Player support Mp3 format music files playback.
Audio Player operation interface:



Default MP3 file storage path: **[Phone root / My music]**

5.5.3 Sound Recorder

In “Option” list, you can choose to record or play a voice clip, and also you can manage the voice clip files.
Default record audio file storage path: **[Phone root / Audio]**

5.6 File Manager

Manage your folders and files under this menu.

Select the Phone root, press option, you can do: Open / Create Folder / Format to the phone file system.

Select a folder, press option, you can do: Open / Create sub folder / Rename / Delete / Sort to the folder.

Select a file, press option, you can do: Play (only for video or audio files) / Forward / See detail / Rename / Copy / Move / Delete / Sort to the file.

5.7 Fun & Games

5.7.1 Games

There are a interesting games “Puzzle” you can play.

5.7.2 Game setting

Turn on / off the game audio and vibration.

5.8 User Profiles

There are 6 user profiles for your choose. You can customize each profile by setting the Tone type / Volume / Ring type / Extra Tone / Answer Mode.

5.9 Organizer

5.9.1 Calendar

You can view the calendar and view / add scheduled tasks of each day.

5.9.2 To Do List

You can edit unfinished task list.

5.9.3 Alarm

You can set three alarm clocks.

5.9.4 Calculator

You can use either keyboard or touch screen to control the calculator.

5.9.5 Unit Converter

5.9.6 Currency Converter

Set conversion rate first, you can easily convert local currency to foreign converter.

5.9.7 World Clock\

5.9.8Healthy

5.9.9 E-book Reader

5.10 Services

5.10.1 STK service

Please contact your local service provider for the STK service detail.

5.10.2 WAP

You can visit Internet WAP sites with the phone. WAP access needs your local service provider’s network support.

(1) Home page

Visit the home page.

(2) Bookmarks

Manage / Visit bookmarked WAP sites.

(3) Recent pages

(4) Enter Address

(5) Service inbox

(6) Settings

Set Network profile / Browser / Cache / Cookies / Certificates

5.10.3 Data Account

Edit GSM Data / GPRS Account information.

5.10.4 Bluetooth

(1) Power

Turn On / Off Bluetooth function.

(2) Inquiry Audio Device

Search Bluetooth headsets and choose to match it with the phone.
You may be asked to input a match code for matching the headsets with phone, please check with your Bluetooth headset user instructions.

(3) My Device

There is a Bluetooth device list matched with your phone. Select an item, you will have options to: Connect / Disconnect / Rename / Delete / Delete All / Service List / Inquiry New Device.

Notes:

1. To use a Bluetooth headset to make / receive calls, you need to connect your phone to its Handsfree Profile service.
2. To use a Bluetooth headset to listen stereo music, you need to connect your phone to its A2DP Profile service.

(4) Active Device

You can view or disconnect the active services of device.

(5) Setting

You can set the Visibility / Change Device Name / Set Authentication / Set Audio Path / Change FTP Setting.

(6) About

You can view Bluetooth Device detail information of the phone.