


Panasonic

ideas for life

Miniature DIL 1A control
type for PCBs

AQ-C RELAYS

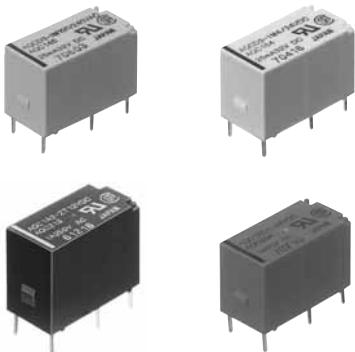

FEATURES

- Compact DIL type:
L20 mm × W10 mm × H12.8 mm
(.787×.394×.504 inch)
- Excellent in noise resistance
- Snubber circuit integrated
- High dielectric strength: 2,500 V
between input and output
- Reverse polarity type available

TYPICAL APPLICATIONS

- Compact AC motor, Solenoid, Magnet, Driver of magnetic valve
- Copying equipment
- NC machine, Robot
- Programmable controller
- Air conditioners

Compliance with RoHS Directive

ORDERING INFORMATION

AQC - -

Load current

Nil: Input module
1A: Output module

Load voltage

1: 75 to 125 V AC (Output module)
2: 75 to 250 V AC (Output module)
D1: 3 to 60 V DC (Output module)
D3: 4 to 32 V DC (Input module)

Type

Nil: DC output
IM: Input module
T: AC output Random
ZT: AC output Zero-cross

Input voltage

Output module: 5, 12, 24 V DC
Input module: 4/24 V DC, 100/240 V AC

Input polarity

Nil: Standard polarity
R: Reverse polarity (Only for output module)

TYPES

1. Input module

Type	Output voltage	Input voltage	Part No.
AC input	4 to 32 V DC	80 to 250 V AC	AQCD3-IM 100/240 V AC
DC input	4 to 32 V DC	3 to 32 V DC	AQCD3-IM 4/24 V DC

Standard packing: Carton: 50 pcs.; Case: 500 pcs.

2. Output module

Type	Load voltage	Input voltage	Part No.
AC output Zero-cross	75 to 125 V AC	5 V DC	AQC1A1 - ZT5 V DC
		12 V DC	AQC1A1 - ZT12 V DC
		24 V DC	AQC1A1 - ZT24 V DC
	75 to 250 V AC	5 V DC	AQC1A2 - ZT5 V DC
		12 V DC	AQC1A2 - ZT12 V DC
		24 V DC	AQC1A2 - ZT24 V DC
AC output Random	75 to 125 V AC	5 V DC	AQC1A1 - T 5 V DC
		12 V DC	AQC1A1 - T 12 V DC
		24 V DC	AQC1A1 - T 24 V DC
	75 to 250 V AC	5 V DC	AQC1A2 - T 5 V DC
		12 V DC	AQC1A2 - T 12 V DC
		24 V DC	AQC1A2 - T 24 V DC
DC output	3 to 60 V DC	5 V DC	AQC1AD1- 5 V DC
		12 V DC	AQC1AD1- 12 V DC
		24 V DC	AQC1AD1- 24 V DC

Standard packing: Carton: 50 pcs.; Case: 500 pcs.

Note: Reverse polarity type (AQC5** and AQC6**) is also produced by lot after receipt of order.

SPECIFICATIONS

Rating [at 20°C 68°F; Input voltage ripple (output module) and output voltage ripple (input module): max. 1%]

1. Input module

Item	Type	AC input	DC input	Remarks
		AQCD3-M 100/240 V AC	AQCD3-IM 4/24 V DC	
Input side	Input voltage	80 to 250 V AC	3 to 32 V DC	
	Input current	Max. 5 mA	Max. 5 mA	
	Pick-up voltage	Max. 80 V AC	Max. 3 V DC	
	Drop-out voltage	Min. 10 V AC	Min. 1 V DC	
Output side	Load voltage	4 to 32 V DC	4 to 32 V DC	
	Load current	0.1 to 25 mA	0.1 to 25 mA	
	Max. "OFF-state" leakage current	Max. 5µA	Max. 5µA	When 32 V DC applied
	Max. "ON-state" voltage drop	Max. 1.6 V	Max. 1.6 V	at max. carrying current

2. Output module

(1) AC output type

Item	Type	Remarks					
		AQC1A1-ZT5VDC AQC1A1-T5VDC	AQC1A1-ZT12VDC AQC1A1-T12VDC	AQC1A1-ZT24VDC AQC1A1-T24VDC	AQC1A2-ZT5VDC AQC1A2-T5VDC	AQC1A2-ZT12VDC AQC1A2-T12VDC	AQC1A2-ZT24VDC AQC1A2-T24VDC
Input side	Input voltage	(5 V type) 4 to 6 V DC	(12 V type) 9.6 to 14.4 V DC	(24 V type) 21.6 to 26.4 V DC	(5 V type) 4 to 6 V DC	(12 V type) 9.6 to 14.4 V DC	(24 V type) 21.6 to 26.4 V DC
	Input impedance (Approx.)	0.3 kΩ	0.8 kΩ	1.8 kΩ	0.3 kΩ	0.8 kΩ	1.8 kΩ
	Drop-out voltage, min	0.5 V	1.2 V	2.4 V	0.5 V	1.2 V	2.4 V
Load side	Max. load current			1 A ^{*1}			Ta = Max. 40°C 104°F
	Load voltage		75 to 125 V AC		75 to 250 V AC		
	Non-repetitive surge current			20 A ^{*2}			In one cycle at 60 Hz
	Max. "OFF-state" leakage current	0.6 m A (When 100 V AC applied)		1.1 m A (When 200 V AC applied)			at 60 Hz
	Max. "ON-state" voltage drop			1.6 A			at max. carrying current
	Min. load current		10 mA ^{*4}		20 mA ^{*4}		

(2) DC output type

Item	Type	Remarks		
		AQC1AD1-5VDC	AQC1AD1-12VDC	AQC1AD1-24VDC
Input side	Input voltage	(5 V type) 4 to 6 V DC	(12 V type) 9.6 to 14.4 V DC	(24 V type) 21.6 to 26.4 V DC
	Input impedance (Approx.)	0.43 kΩ	1.2 kΩ	2.8 kΩ
	Drop-out voltage, min		0.8 V	
Load side	Max. load current		1 A ^{*1}	Ta = Max. 40°C 104°F
	Load voltage		3 to 60 V DC	
	Non-repetitive surge current		1.5 A ^{*2}	at 1s
	Max. "OFF-state" leakage current	0.1 m A (When 60 V DC applied)		
	Max. "ON-state" voltage drop		1.6 V	at max. carrying current
	Min. load current		1 mA ^{*4}	

Notes: *1. Refer to REFERENCE DATA "1. Load current vs. ambient temperature".

*2. Refer to REFERENCE DATA "2. Non-repetitive surge current vs. carrying time".

*3. Refer to REFERENCE DATA "3. Input current vs. input voltage characteristics".

*4. When the load current is less than the rated minimum load current, please refer to "Cautions for Use of SSR".

AQ-C

Characteristics [at 20°C 68°F; Input voltage ripple (output module) and output voltage ripple (input module): max. 1%]

Input module


Item	Type	AC Input	DC Input	Remarks
Operate time, max.		20 ms	0.5 ms	Input voltage: 24 V DC or 100V AC
Release time, max		20 ms	0.5 ms	Output voltage: 24 V DC Output current: 25mA
Insulation resistance, min.		10 ⁹ Ω between input and output		at 500 V DC
Breakdown voltage		2,500 Vrms between input and output		For 1 minute
Vibration resistance	Destuctive	10 to 55Hz double amplitude of 3 mm		1 hour for X,Y, Z, axis
	Functional	10 to 55Hz double amplitude of 3 mm		10 minutes for X,Y, Z, axis
Shock resistance	Destuctive	Min. 980 m/s ² {100 G}		5 time each for X,Y,Z axis
	Functional	Min. 980 m/s ² {100 G}		4 time each for X,Y,Z axis
Ambient temperature		-30°C to +80°C -22°F to +176°F		
Storage temperature		-30°C to +100°C -22°F to +212°F		

Output module


Type Item	AC output		DC output	Conditions
	Random	Zero-cross		
Operate time, max.	1 ms	1/2 cycle of voltage sine wave + 1ms	0.5 ms	
Release time, max.	1/2 cycle of voltage sine wave + 1ms		1 ms	
Insulation resistance, min.	10 ⁹ Ω between input and output			at 500 V DC
Breakdown voltage	2,500 Vrms between input and output			For 1 minute
Vibration resistance	Destuctive	10 to 55Hz double amplitude of 3 mm		1 hour for X,Y, Z, axis
	Functional	10 to 55Hz double amplitude of 3 mm		10 minutes for X,Y, Z, axis
Shock resistance	Destuctive	Min. 980 m/s ² {100 G}		5 time each for X,Y,Z axis
	Functional	Min. 980 m/s ² {100 G}		4 time each for X,Y,Z axis
Ambient temperature	-30°C to +80°C -22°F to +176°F			
Storage temperature	-30°C to +100°C -22°F to +212°F			
Operational method	Random Turn-ON, Zero-cross Turn-OFF	Zero-cross (Turn-ON and Turn-OFF)	—	

REFERENCE DATA


1. Load current vs. ambient temperature (AC/DC output)

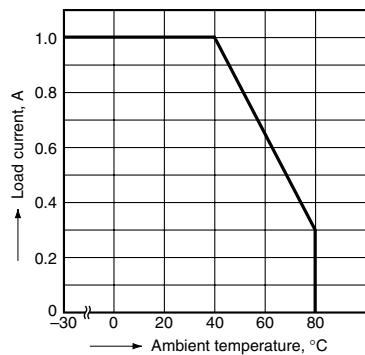


2.- (1) Non-repetitive surge current vs. carrying time (AC output)

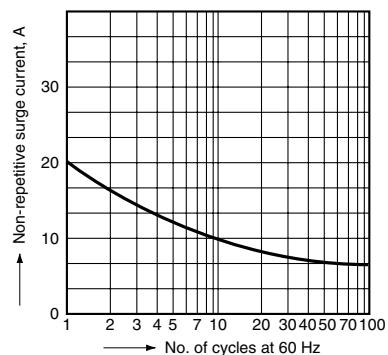

2.- (2) Non-repetitive surge current vs. carrying time (DC output)

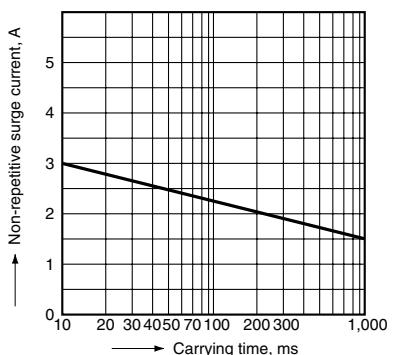


3. Input current vs. input voltage characteristics (AC/DC output)

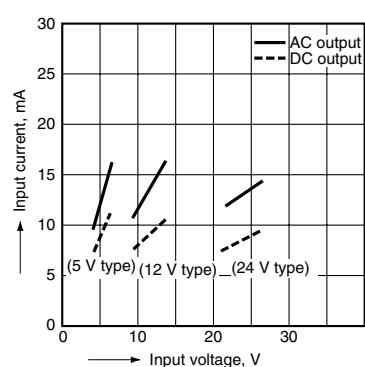


4.- (1) Input current vs. input voltage characteristics (AC input)

Tested sample: AQCD3-IM100/240 V AC, 5 pcs.

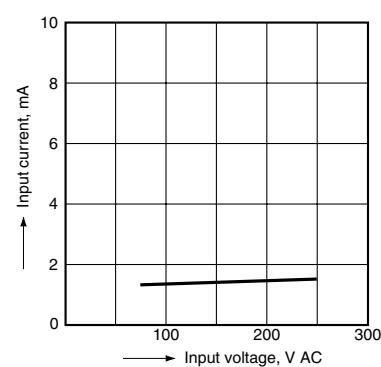


4.- (2) Input current vs. input voltage characteristics (DC input)

Tested sample: AQCD3-IM4/24 V DC

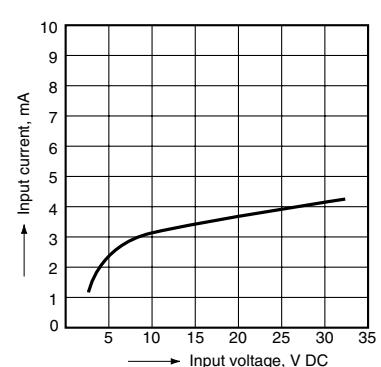


5. Load current vs. ambient temperature characteristics for adjacent mounting

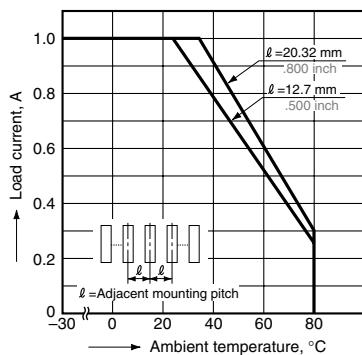



DIMENSIONS (mm inch)

1. Input module (AC, DC)

CAD Data




The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://panasonic-electric-works.net/ac>



AC input	DC input
⑤...Output: DC-	⑤...Output: DC-
⑧...Output: DC+	⑧...Output: DC+
⑯...Input: AC	⑯...Input: DC+
①...Input: AC	①...Input: DC-
Case color: Yellow	Case color: White


General tolerance: $\pm 0.5 \pm .020$

PC board pattern (Copper-side view)

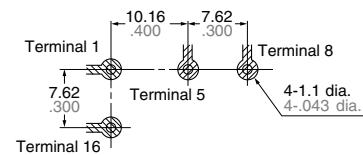

Tolerance: $\pm 0.1 \pm .004$




Schematic

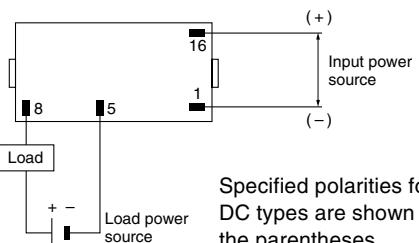

Specified polarities for DC types are shown in the parentheses.

2. Output module (AC, DC)


CAD Data



AC output	DC output
⑤...Output: AC	⑤...Output: DC-
⑧...Output: AC	⑧...Output: DC+
⑯...Input: DC+	⑯...Input: DC+
①...Input: DC-	①...Input: DC-
Case color: Black	Case color: Red


General tolerance: $\pm 0.5 \pm .020$

PC board pattern (Copper-side view)

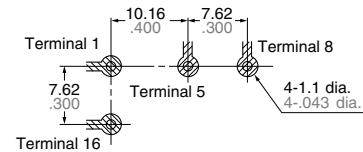

Tolerance: $\pm 0.1 \pm .004$

Schematic

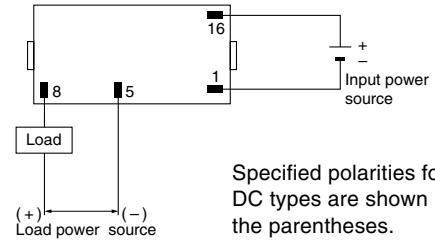

Specified polarities for DC types are shown in the parentheses.

ACCESSORY



PC1A-PS

AQ-C


NOTE

When used for the load less than rated

In the case of the load current less than rated, malfunction may result from the residual voltage across the both ends of the load even if the solid state relay is turned off.

Use a dummy resistor as a countermeasure.

The total of the current through the resistor and the load current must exceed the min. rated load current.

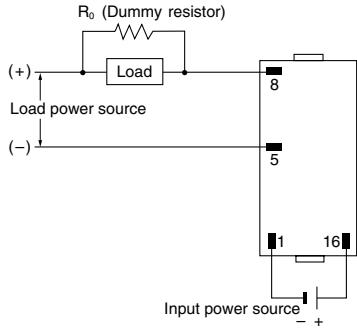


In case the dummy resistor is not used, keep in mind that the residual voltage becomes as follows:

Example:

For the inductive load by the 5 mA load current and the 200 V AC load voltage, the load impedance becomes 40 kΩ and $V_e/V = 16\%$ is estimated from the below graph.

Accordingly, the 32 V voltage remains across the both ends of the load when the solid state relay is turned off.

• Characteristics of residual voltage vs. load impedance

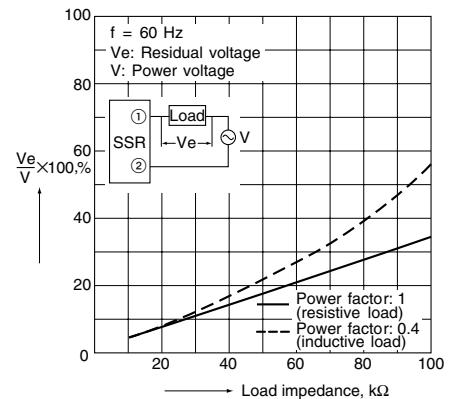

For Cautions for Use.