Lunar-N

Excellent synergy effect of **LF/RF**
Cooling/Heating & Cryo Electrophoration

User Manual



Perfect solution from all vascular lesions to skin rejuvenation, all in one

The complete solution of aesthetic treatment

The copyright and all publication rights for this manual are owned by ILOODA Co., Ltd.

Any part of this user manual must not be modified, reproduced, or copied without prior permission of ILOODA Co., Ltd. (Hereafter referred to as ILOODA)

ILOODA has the right to alter the technical specifications and/or configuration of the apparatus to enhance its performance, reliability or production capability in our discretion without any prior notification.

Exemptions

The information provided by ILOODA is correct and reliable.

However, ILOODA doesn't take any responsibility for the damage caused by using the equipment for different purposes other than original ones presented in this user manual.

ILOODA Co., Ltd. (Manufacturing Company)

Address: Rm801~Rm 805 Venture Valley, # 958 Gosaek-Dong, Gwonseon-Gu, Suwon City, Gyeonggi-Do, Korea

Tel: +82-31-278-4660

Fax: +82-31-278-4661

Website : www.ilooda.com , E-Mail : sales@ilooda.com

Please check the related local regulations before using the equipment. The use of the apparatus may not be permitted if it is not conformity with the related local law.

Table of Contents

Chapter 1 **Overview**

1. Apparatus-verification Data
2. Items Provided5
3. How to Use This User Manual

Chapter 2 **Introduction to Lunar-N**

1. Introduction to Lunar-N
2. Qualification for Using Lunar-N
3. Essentials for Using Equipment
   - 3.1 Installation of Equipment
   - 3.2 Patient and Cautions
   - 3.3 Setting of Equipment

Chapter 3 **Safety Cautions**

1. Cautions for Environmental Safety
   - 1.1 Electrical Hazard
   - 1.2 Fire Hazard
2. Cautions for Safe Use of Equipment
   - 2.1 Cautions for Product Safety
   - 2.2 Cautions before Use
   - 2.3 Cautions during Use
   - 2.4 Cautions after Use
   - 2.5 Cautions in Storage
   - 2.6 Cautions for Maintenance

Chapter 4 **Structure of Equipment**

1. Description of Equipment
   - 1.1 External Appearance.

Chapter 5 **Use of Equipment**

1. Installation and Use of Equipment
   - 1.1 Installation of Main Body
   - 1.2 Installation of Accessories
   - 1.3 Summing-up of Using Process

2. Use of Screen Menu

2.1 Use of Power On/Off and Menu

2.2 Error Message

Chapter 6 **Specifications of Equipment and Items to Be Written**

1. Specification of Equipment

1.1 Electrical Specification

1.2 Mechanical Specification

2. Items to Be Written

Chapter 1 Overview

1. Apparatus-verification Data

Product Name : Mixing Stimulator for Medical Use

Model Name : Lunar-N

Manufacture Serial Number :

Date of Manufacture :

2. Items Provided

The components (Accessories) consisting of this equipment are as follows.

- Main Body
- RF Handpiece and LF Handpiece
- Power Cable
- Ground Pad & Cable
- User Manual
- Cart

3. How to Use This User Manual

- Purpose of This User Manual

  The purpose of this manual is to make users be fully aware of the structure, installation, manipulation, operation, and maintenance of Lunar-N System.

- Keeping of This User Manual

  This manual must be kept together with the equipment or near the equipment so as that you can refer to it if necessary.

- Expressions Used in This User Manual

  The expressions Caution, Note, and Warning as below are used in this manual.

Caution

This expression provides the important information to pay attention to in using the equipment.

Note 

'Note' warns the user about the possible problems related with the improper use of the equipment. These problems include the damage to other related property as well as the poor operation of the system. This expression involves the matters to take a full note to avoid this harm.

Warning 

'Warning' warns the user about the possibility of improper use of the system and of injury, death, or serious side effects.



Please check the related local regulations before using the equipment. The use of the apparatus may not be permitted if it is not conformity with the related local law.

Chapter 2 Lunar-N Introduction

1. Lunar-N Introduction

Lunar-N is Total Skincare equipment that combines Electro stimulation and Cooling/Heating.

It is a skin treatment equipment using Cryoelectrophoresis which extends the small skin holes that molecules cannot move using electro stimulation, and enables the medicine to reach up to subcutaneous fat layer. You can expect more than 2 times of medicine penetration effect than current Iontophoretic (penetration rate: 50~60%).

In addition, it has strong cooling system that enables High Frequency (RF) energy penetration up to dermis layer without pain, and promotes/ induces collagen generation by heating the dermis layer to provide elasticity to the skin.

Lunar-N restores tired and loose skin by various pollution and stress back to healthy and elastic skin using two types of skin treatment.

Electro stimulation (LF, RF)

Skin elasticity effect (Lifting) by μ-Current

Alkaline reaction: Sebum and keratin degradation. Soften skin and tissue.

Acid reaction: Enhance elasticity, enforce protection by hardening effect of weak acid.

Joule Heat: Activate collagen

Cooling

Strong soothing effect for tired skin by summer UV and heat

Pore astringent effect (Astringent)

Efficiently removes swelling at eye rims or cheek with cold inflammation, edema reduction effect

Excellent moisturizing effect by synergy with face lotion

Cryo-electrophoresis

Efficient skin penetration of nutrition elements (Nutrient)

Strong Cryoelectrophoresis cool down the skin surface to prevent skin burn and to maximize medicine penetration effect. Existing Electrophoresis has 30% of penetration rate while Lunar-N can penetrate 50~60% without skin damage.

.

2. Qualification for Using Lunar-N

It is strictly required that this equipment be used only by the person qualified for safety handling and use of mixing stimulators. Thus the people who don't have a stimulator-related license or training certificate must not use this equipment.

It is recommended that all the relevant people (Nurse etc.) including medical staffs complete the training on installation procedure and operating method of stimulators, potential hazards, and interactions of tissues and take the respective safety education program according to each country's regulation in addition to stimulator-related safety education.

It is also recommended that the person wanting to use the stimulator obtain an approval required for using it from the relevant authorizing organization in the country.

3. Essentials for Using Equipment

The following instructions are the essential guidelines to be surely considered before using the equipment. If you don't conform to the following instructions, the unexpected critical damage like performance degradation of the equipment may be brought about.

3.1 Installation of Equipment

The equipment must be installed and used only in a hospital or a place where the stimulator-related treatment is permitted. The use of the equipment in a place (i.e. private home etc.) where is not qualified for treatment by stimulators is strictly prohibited.

The equipment should be moved and installed only in a state of turning-off and placed in a safety flat space.

The power and system specifications must be checked in installing the equipment and the 'installation' section in this manual should be referred to for a correct installation in installing the electrode pad or other accessories.

Avoid conductive metallic chairs for patients and doctors or treatment tables and must use non-conductive fabric or mat treatment table.

3.2 Patient and Cautions

Make sure to give the treatment only to the patient in accordance with the purpose of this equipment after the doctor's prior diagnosis. The treatment to the patient with other lesion, not with the originally targeted one without the doctor's prior diagnosis is strictly prohibited.

Before treatment, make sure to check the patient's skin state and sterilize the region to be treated so as that there are no foreign substances.

Before treatment, remind a patient of the cautions before, during, and after treatment and notify the possibility of occurrence of unintended abnormal symptoms to him or her.

3.3 Setting of Equipment

Set the parameter values in consideration of the patient's state before setting the equipment.

The setting of the equipment must be conducted in standby mode and the handpiece should be put in a safety place (Handpiece Holder) when the equipment is set.

Increase using amount and intensity gradually from a small value to the desired value when adjusting the setting values.



- Abide by all the safety-related cautions stated in this maual.
- Never adjust the equipment at the user's (doctor's) discretion with other adjusting method different from the method stated in the manual.
- Do not make the equipment used by a non-qualified person without the supervision of a trained and experienced specialist.
- Place the handpiece in a stable location and keep the electrodes in a clean state.
- Patient and operator (doctor) should not be carried the metallic materials possibly conducting electricity.
- Use the equipment only onto the skin surface in which there are no infection and other damage.
- Never use the equipment for treatment of different purpose other than original purpose.
- Make sure to turn off the equipment not to be operated by others when it is not used or even an operator (doctor) leaves for a moment.
- Never remove the cover of the equipment. The cover of the equipment can be removed only by an authorized repair person of the manufacturer. It is impossible for the equipment to conduct the RF treatment in a situation when the equipment cover or protection panel is removed.
- **Do not disassemble the equipment. Only the manufacturer's official mechanic may disassemble it. The operating of high frequency is not allowed in disassembled state.**

Chapter 3 Safety Cautions

1. Cautions for Environmental Safety

1.1 Electrical Hazard

All the users of the equipment should read and observe the following cautions for electrical safety. Or electric shocks may take place.

Do not touch any parts carelessly except the controls of the system. Turn off the system or remove the plug when executing the ordinary jobs like connecting the ground plate or ground rod to the equipment.



- Make sure to use the stimulating system only in a place where there is electric installation, obeying the standards and regulations of each region.
- Do not use water or other liquid solvents when cleaning electrical parts. Prevent water or other liquid from spilling it on the system.
- Install with care not to fall down on electric wires and pipes or to entwine electric wires.
- Make sure to install and use the proper parts and accessories and do not use the different products from the accessories provided along with the equipment.
- Check the damage to the external appearance and electric wires of the equipment on a regular basis.

1.2 Fire Hazard

All the users of the equipment should read and observe the following cautions for fire hazard. Or fire may take place.



- Do not put the flammable or combustible materials or substances around the treatment room.
- If you use alcohol to clean the handpiece electrodes, wait up to the time when it is completely evaporated and dried before operating the system.
- Do not give the energy (stimulation) to any part except for the part to be treated.
- Avoid the conducting materials like metals that may work in reverse with the energy (stimulation) and absorb it when giving it.
- Cut off the power immediately in case of fire.
- Only use a CO2 or powder extinguisher in case of fire.

2. Cautions for Safe Use of Equipment

2.1 Cautions for Product Safety

The owner and user of the stimulating system are obliged to obey all of the equipment-related safety cautions. The following cautions related with the equipment must be observed.

- Use this stimulating system only for the designed purpose.
- Use the equipment only when it operates normally
  (There should not be an error message).
- Manage this manual and all other related materials always in a good condition and keep them in a place where the stimulating equipment is installed to use them at any time.
- Make the stimulating equipment operated, maintained and repaired only by a qualified and authorized person.
- Do not remove or erase the safety cautions and warning message attached to the stimulating system.
- Do not give a shock to the equipment.
- Keep the main body of the equipment, the handpieces, the connector and the holders in a clean state that has no foreign substances.

2.2 Cautions before Use

I. Make sure to read the instructions and use the equipment before using it.

II. Make sure to use the equipment on a doctor's prescription.

III. Connect the power on with a wet hand.

IV. Be careful not to spill water into the main body. It can cause the damage to the equipment and the fire and electric shock.

V. Do not install the equipment in a watery, humid place. It can cause the damage to the equipment and the fire and electric shock.

VI. Install the equipment at least a 100m distance from the wall.

VII. Be careful not to make the power cord pressed by heavy weights or touched by sharp materials. The use of a damaged cord can cause fire or electric shock.

VIII. Never use the equipment near flammables. It can cause the deformation of the main body, the failure in the system, and the fire.

IX. Make this machine used only a professionally trained person.

X. Conduct a prior check on the manipulation of the system.

XI. Check the switches etc. and then confirm the correct operation.

XII. Connect all the cords accurately not to break away easily.

XIII. When you use the equipment after a long interval, confirm if it operates normally and safely or not.

XIV. Never disassemble or change the equipment by anybody except by an installation and repair technician. It can cause fire or electric shock.

2.3 Cautions during Use

I. Remove all the interruptions around the equipment when it is used. Do not put papers or other materials on the top of the machine and block the vent.

II. When the failure in the system takes place, stop using it, and turn off the power and then contact our customer service center.

III. In case of a power outage, turn off the power immediately and put the controlling knob and switches back to the original position.

IV. Do not use the equipment near a patient monitor.

V. Always check if there are some abnormalities on the patient and the equipment during use. If some abnormalities occur on the patient or the equipment, check the patient's safety and stop the equipment. When you confirm that the patient and the equipment have no problems after check-up, continue to use it again.

VI. Do not make anybody contact the machine except the patient and the doctor.

VII. Be careful not to conduct the energy (stimulation) into another person.

VIII. Be careful not to install the power cord of another machine at the same time. It can cause the performance degradation of the equipment.

IX. Make sure to use the handpiece electrodes always after cleaning to prevent foreign substances.

X. Do not pull the cord of the main body by force. It can cause the performance degradation of and the trouble with the machine.

2.4 Cautions after Use

I. After use, put the control knob and switches back to the original position and turn off the power.

II. Be careful not to give an excessive force to the connecting part of cords when you pull out the cords.

III. Make sure to turn off the power and separate the power cord.

2.5 Cautions in Storage

I. Do not keep the equipment in a place where there is some slope, shaking, or possible impact. It can cause the performance degradation of the machine or the fire and electric shock.

II. Do not keep the equipment in a place where chemicals are stored or some gas is generated.

III. Do not keep the equipment in a place where temperature, air pressure, humidity, ventilation, sunlight, and air containing dust, salt and sulfur have a harmful influence on it.

IV. Keep the equipment in a place far from water.

2.6 Cautions for Maintenance

I. In case of the trouble with machine, make sure to stop using it and contact the store you purchased from or the customer service center.

II. Never open the machine and the controller.

III. Do not give an impact to the main body. If there had been some impact on it, make sure to use the equipment after check-ups.


Chapter 4 Structure of Equipment

1. Description of Equipment

1.1 External Appearance.


1.1.1 Main Body

Front Part

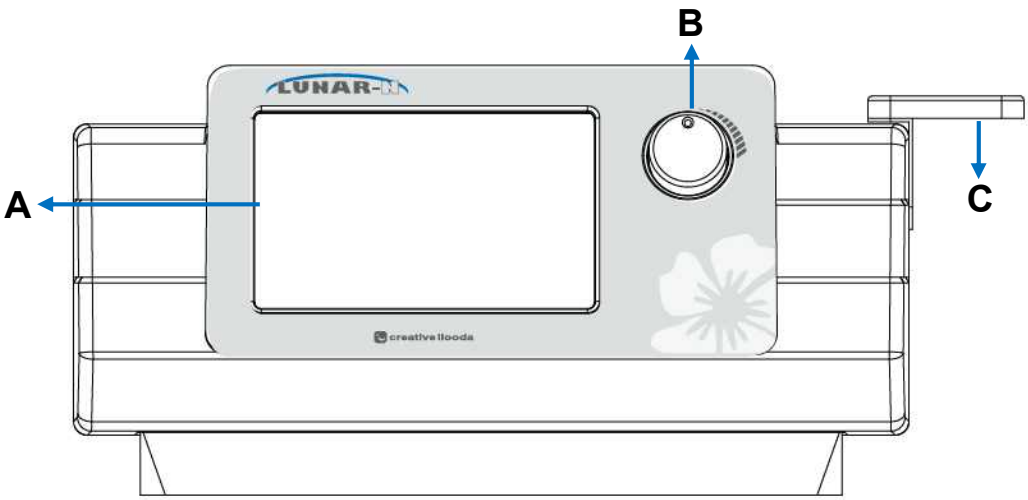

- **A**. LCD Monitor: Touch panel conducting all controls of the machine and outputting the monitor
- **B**. Volume Switch: Volume switch adjusting the intensity of energy
- **C**. Handpiece Holder: Cradle keeping handpieces with safety


Flank Part

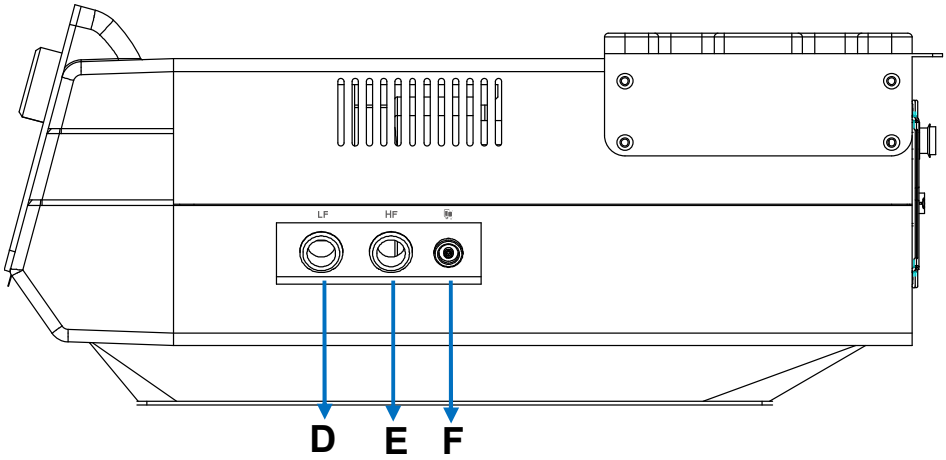

- **D**. BIP Handpiece Connector: Connecting part between BIP handpiece and main body
- **E**. RET Handpiece Connector: Connecting part between RET handpiece and main body
- **F**. Ground pad: Connecting part between main body and ground plate

(in case of using LF handpiece)

Rear Part

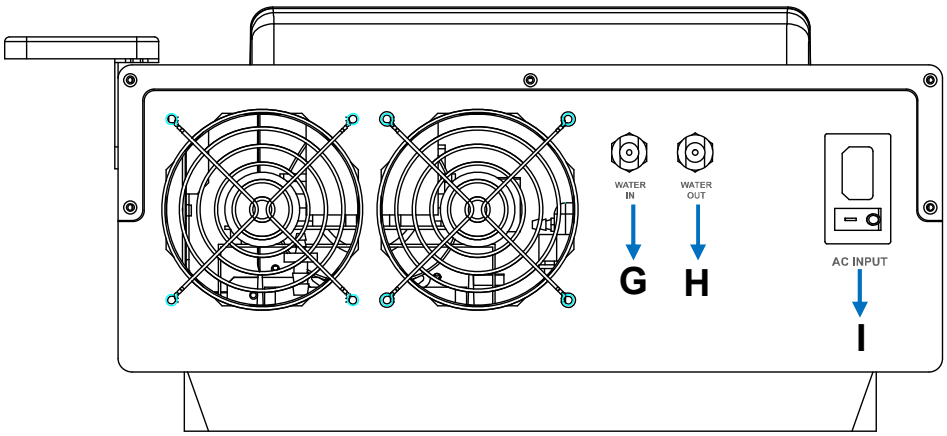


- **G**. WATER IN connector: A coolant inlet part.
- **H**. WATER OUT connector : A coolant outlet part
- **I**. AC INPUT : Power code connector and ON/OFF switch

1.1.2 Hand-piece description

RF Hand-piece

It is composed of 2 ceramics, and this Hand-piece is used to transmit High Frequency.

It can be used without requiring additional electrode plate or pad.

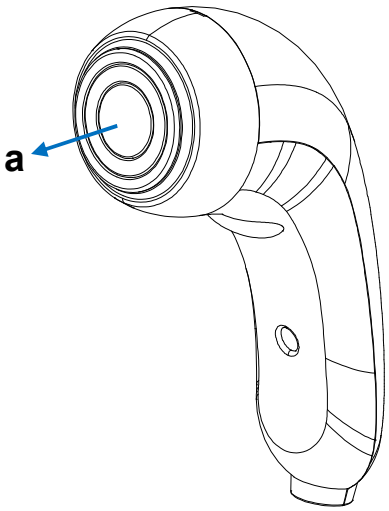


a. HF Ceramic: Electrode that transmit High Frequency to human body.

LF Hand-piece

It is composed of single ceramic, and this Hand-piece is used to transmit low frequency.

It is used with electric pad.

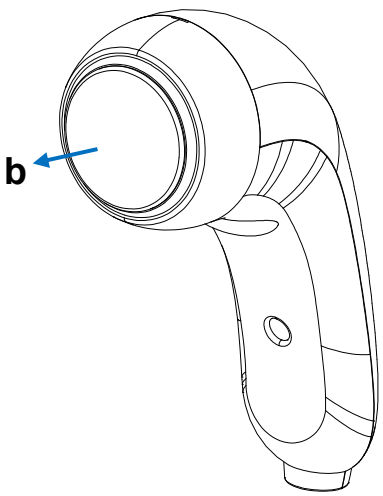

b. BIP Electrode: Electrode that transmit low frequency to human body.

1.1.3 Accessories

- The accessories comprising this equipment are as follow.

- Power Cable



- Ground pad & cable (In case of using LF handpiece)





- User Manual



- Cart



Chapter 5 Use of Equipment

1. Installation and Use of Equipment

1.1 Installation of Main Body

(Refer to the images and numbering of Rear Part in '1.1.1 Main Body of Chapter 4)

1) Connect the power cord to the power cord connector (H) at the back side of the main body.



- Check the specification of the power cable and connect it.
- Install the main body in the cart or a flat space so that it cannot move.

1.2 Accessory Installation

(Refer to the images and numbering at the side of 'Chapter 4, 1.1.1 Main Body Description')

1) Connect electric pad to the electric pad connector **(F)** at the side.



- Connect cable to Main Body's electric pad connector after connecting electric pad and electric pad cable.

- LF should be used with electric pad. Impulse is not transmitted to body if the electric pad is not used.
- Electric pad should be tightly adhered to skin. When electric pad is not tightly adhered to the skin and there is space between pad and skin, then the impulse may not be smoothly transmitted.
- HF Hand-piece is used alone. There is no electric current activity at the electric pad when using HF Hand-piece.

1.2.1 Cooling water refilling coupler installation.

(Please refer the description of equipment 1.1.1.)

1) Insert the cooling water refilling coupler into the cooling water refilling connector (IN/OUT) on the back of the equipment horizontally.

2) Put the edge of the coupler hose into the distilled water bottle.



I



II



- Connect the cooling water refilling coupler with the main body likewise **figure I** until you hear the “tick” sound.
- Disconnect the coupler from the main body with putting the disassembling button (the metal part) likewise **figure Ⅱ**
- If the cooling water system is working when the coupler connected incompletely, it can be the cause of malfunction.



- Cooling water should be located higher than the coupler when you refill the water.
- You must use distilled water. Using other liquid for refill can be cause of malfunction.

1.3 Equipment use procedure



1) Connect power cord to the back of main body.



2) Connect electric pad to the side of main body.



3) Turn on the power switch at the back of the main body.



4) Set output value.



5) Tightly adhere the electric pad and wait for treatment, (when using LF Hand-piece)



6) Slowly turn the main body's volume knob to clockwise direction for treatment.



- Make sure to install and use the parts and accessories after checking their specifications and do not use the different discretionary products from the accessories provided.
- Remove debris on the electrode pads and hand piece and manage them clean.
- Make sure to have the skin contacting the ground Pad and handpiece electrodes cleaned, and in case of wound and allergic skin, make sure to have the treatment after consultation with a doctor.
- Electrode pads must be in contact with skin perfectly, and the space between the skin and the electrode pads to prevent the occurrence of space. If there is space, the power can be lower and skin can be burnt.
- Check the complete connection of the accessories before turning on the power switch.
- Make sure to start the stimulation output from zero and raise it gradually, observing the patient's state.
- Do not use water or other liquid solvents in cleaning the electrical parts. Prevent to drop water or other liquid on to the system.
- Check if there is moist on the skin when using the ground plate/rod. Make them contacted after removing moist.
- Conduct the treatment after removing the metals causing an unintended influence on the electrode during treatment.
- Install with care not to fall down on electric wires and pipes or to entwine electric wires.
- Check the damage to the external appearance and electric wires of the equipment on a regular basis.
- Avoid conductive metallic chairs for patients and doctors or treatment tables and must use non-conductive fabric or mat treatment table.


2. Screen Menu Instruction (LF)

1.1 Power ON / OFF and Menu using instruction

All operation module and display screen appears at the front LCD monitor (**A**). This is touch screen, so operation can be done by touching the screen.

1) Connect power cable and accessory, and turn on power switch.

2) Following main screen appears around 2~3 seconds after power on

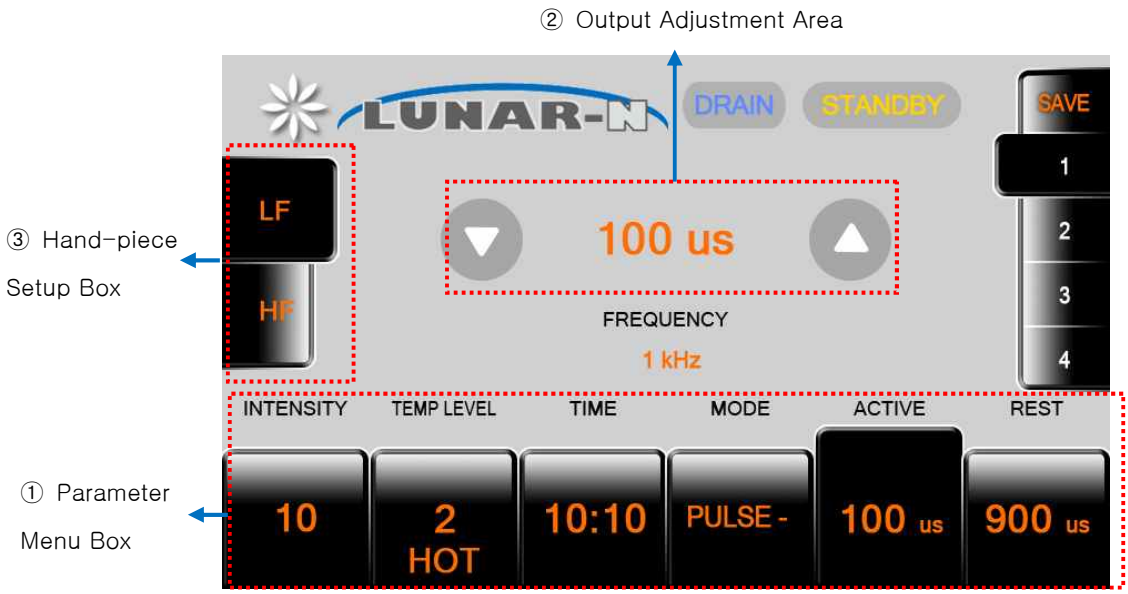

3) Select Hand-piece type from ③ **Hand-piece Setup Box** at the left side of screen.

- **LF**: Low Frequency Hand-piece
- **HF**: High Frequency Hand-piece

4) Set output value by touching each menu at ① **Parameter Menu Box**.

When pressing the menu to setup, then corresponding menu value appears to Output Adjustment Area at the center of screen. Adjust the value to desired value by touching the arrows UP/DOWN button at each side.

- TIME : Treatment time setup

- Setup Range: 1 minute ~ 20 minute (adjustable by 1 minute unit)

- **MODE** : Impulse mode setup

  - Setup Range: PULSE+ / PULSE-

- **ACTIVE** : Energy irradiation time to skin per one impulse cycle

  - Setup Range: 50us ~ 1000us (adjustable by 50us)

- **REST** : Energy resting time to skin per one impulse cycle.

  - Setup Range: 50us ~ 1000us (adjustable by 50 unit)

- **TEMP LEVEL** : Temperature adjustment

* ② **Output Adjustment Area** changes to following display for temperature setup, and adjust temperature by touching UP/DOWN.

Each of COLD/HOT area is displayed in blue/red gauge. The gauge bar becomes full when each temperature stage is reached.




HOT : Stage 1~3

Stage 1: under 37℃

Stage 2: between 38℃ ~ 42℃

Stage 3: above 43℃



COLD : Stage 1~4

Stage 1: above 11℃

Stage 2: between 10 ~ 1℃

Stage 3: between 0 ~ -9℃

Stage 4: between-10 ~ -20℃

5) After setup is completed, tightly adhere the electric pad and Hand-piece electrode to skin, and turn the **B. Volume Switch** to clockwise direction. It will change ④ **Output Box** from **STANDBY** to **RUN** state.



6) From RUN state, turning the **B. Volume Switch** slowly to clockwise will increase **INTENSITY** value lower left side of screen, and is ready to treat the person. Now, turning the Volume Switch to counter-clockwise will decrease INTENSITY value. When the switch is turned completely to the counter-clockwise, then ④ **Output Box** changes from **RUN** to **STANDBY** state.

- **INTENSITY** : Intensity of impulse

  - Setup Range: 0 ~ 100 (adjustable by 1 unit)

7) To store current setting value, touch SAVE in ⑤ **Save Box** at the right side of screen, and select OK from the following popup window. It will save current setting value to corresponding number. Just touch the corresponding number to call currently stored value.



8) **FREQUENCY** at the lower side of ② **Output Adjustment Area** automatically calculates and displays the setup output energy. It cannot be adjusted by user.

9) To turn off the equipment after treatment is completed, turn the switch from RUN to STANDBY state and turn off the power switch at the back of main body.


3. Screen Menu Instruction (HF)

3.1 Power ON / OFF and Menu Description

All operation modules and display screen are displayed in LCD monitor (**A**) at the front of main body. It is touch screen, and all operation is performed by touching the screen.

1) Connect power cable and accessory, and turn the power switch on.

2) Following main screen appears around 2~3 second after power on.

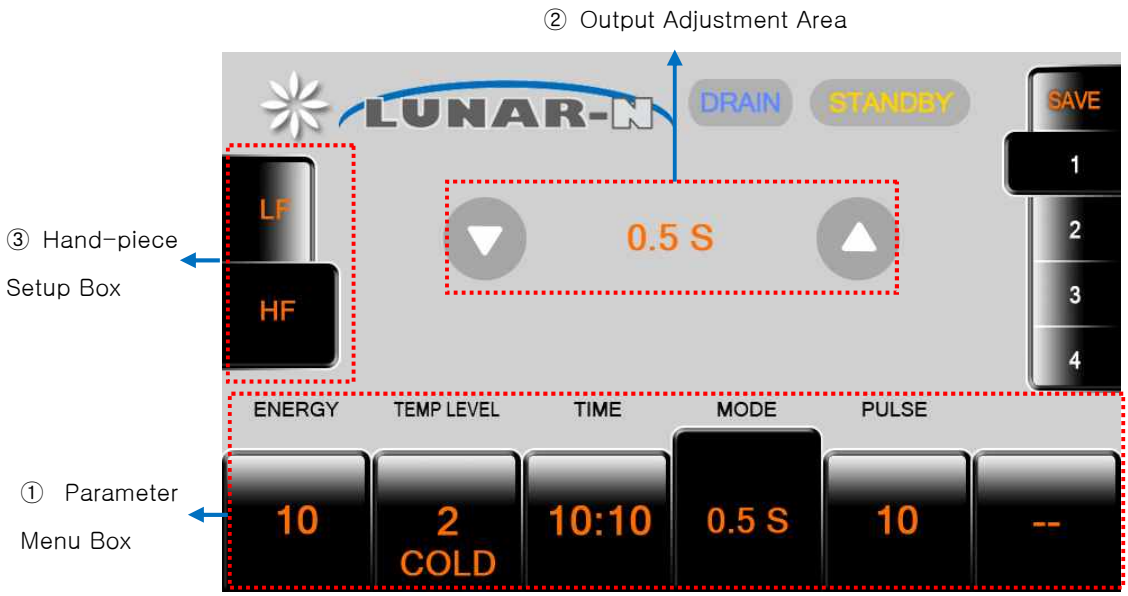

3) Select Hand-piece type from ③ **Hand-piece Setup Box** at the left side of screen.

- **LF** : Low Frequency Hand-piece
- **HF** : High Frequency Hand Piece

4) Set output values by touching each menu of ① **Parameter Menu Box**.

Corresponding menu value appears in the ② **Output Adjustment Area** at the center of screen by touching the menu to set. Adjust the desired setup value by touching the UP/DOWN round arrow type button at both sides.

- **TIME** : Treatment time setup
  - Setup Range: 1 minute ~ 20 minute (adjustable by 1 minute)

- **MODE** : Impulse mode setup

  - Setup Range: CW, 0.5S, 1S

- **TEMP LEVEL** : Temperature adjustment

  (See LF Instruction)

5) After setup is completed, tightly adhere the electric pad and Hand-piece electrode to skin, and turn the **B. Volume Switch** to clockwise direction for treatment. (See LF Instruction)

6) To store current setting value, touch SAVE in ⑤ **Save Box** at the right side of screen, and select OK from the following popup window. It will save current setting value to corresponding number. Just touch the corresponding number to call currently stored value.

7) **PULSE** at the ① **Parameter Menu Box** displays the High Frequency output count. It cannot be adjusted by user

8) To turn off the equipment after treatment is completed, turn the switch from RUN to STANDBY state and turn off the power switch at the back of main body.

2.1 Error Message

The error message is a warning or notifying pop-up message appearing during use or operation. If you encounter the following message, stop the treatment immediately, check the content of the message, and then readjust the equipment.



Screen of Error Message

The error message as the left side pops up and the message in the box varies with the content of the error. Refer to the following table for the contents of the errors.

Message	Error	Solution
Zero start	The volume switch is not set on Zero (0).	Turn the volume switch to the left and then start it from zero (0).
Time Out	The setting time is over	Reset the time or finish the operation
Temp Open	Temperature sensor is unlinked or loosen	Contact the retailer or the manufacturer.
Over Temp	The temperature inside the machine is over 60℃. –over temperature	Stop operating and turn off the machine immediately.



- Conduct the treatment with starting the intensity value from zero and increasing it slowly. If you don't start the machine from zero, the error message appears and the output is not generated.
- You can not use the two type of handpieces (LF/HF) at the same time. You should choose one of them according to the treatment purpose.
- When the error message appears, you should stop the machine immediately and check it out.
- The treatment stimulation should be to the extent of what a patient doesn't feel uncomfortable. Avoid the excessive stimulation.
- The electrodes of the handpiece should be contacted to the skin only under the STANDBY state. If they are contacted to the skin in the RUN state, spark may be generated and then burn may take place.

Chapter 6 Specifications of Equipment and Items to Be Written

1. Specification of Equipment

1.1 Electrical Specification

1) Rated Voltage and Consumption Power: 100 ~ 240VAC±10%, 50/60Hz, Less than 240VA

2) Output Voltage : 48V, 11A MAX

3) LF

Ⓐ Intensity : 0 ~100 (1 step)

- PULSE + : Max RMS 16V ± 25%, 30mA at 500Ω load
- PULSE – : Max RMS 16V ± 25%, 30mA at 500Ω load

Ⓑ Mode

- PULSE + : 0.5KHz ~ 10KHz
- PULSE – : 0.5KHz ~ 10KHz

Ⓒ Time : 1min ~ 2min (+1min step)

ⒹFrequency

- PULSE + : Active / Rest → 50uS ~1,000uS (50uS step)
- PULSE – : Active / Rest → 50uS ~1,000uS (50uS step)

4) HF

ⒶIntensity : 0 ~100 (1 step)

- 0.5S : Max RMS 50V ± 25%, 90mA at 500Ω load
- 1S : Max RMS 50V ± 25%, 90mA at 500Ω load
- CW : Max RMS 50V ± 25%, 90mA at 500Ω load

ⒷMode

- 0.5S, 1S, CW

ⒸTime : 1min ~ 20min (+1min step)

ⒹFrequency

- 0.5S, 1S, CW : 1MHz

5) COLD / HOT

Ⓐ Level: OFF, COLD, HOT (under the 22°C in room temperature)

- COLD : -20 ~ 20 °C
- HOT : 37 ~ 43 °C

6) Protection

(1) Common Fact: Protection circuit is operated when power voltage and electric current are beyond limit.

(2) RF Part: When you turn on the power after turning off the power, the output starts from the initializing value 0. If the volume knob is positioned in the middle, the machine cannot be operated.

1.2 Mechanical Specification

1) Dimension : 375mm x 400mm x140mm [WxDxH]

2) Weight : 13.3kg

2. Items to Be Written

1) Product Name: ClassⅢ Mixing Stimulator for Medical Use (A16270.01)
Model Name: Lunar N

2) Name of Manufacturer: ILOODA Co., Ltd.
Address: #801~805 Venture Valley, 958 Gosaek-Dong, Gwonseon-Gu, Suwon City, Gyeonggi-Do, Korea

3) Manufacture Permission Number: No. 2461
Article Permission Number:

4) Using Purpose: Alleviation of Muscle Pains

5) Manufacture Number/Date of Manufacture: Written on the top of the manual (5p. Apparatus-verification Data)

6) Weight and Packing Unit
   (1) Weight: 13.3kg (Main body)
   (2) Packing Unit: 1 Set

7) Performance and Using Method: Refer to the Manual

8) Cautions in Use: Refer to the Manual

9) Rated Power and Voltage
   (1) Electrical Rated: 100 – 240VAC, 50/60Hz
   (2) Consumption Power: Less than 240VA
   (3) Protection Type and Degree against Electrical Shock: Class I Device, BF-type Device

10) Attachment of Items to be written: Back Side of the Main Body

11) This product is medical apparatus.