


Internal USB version

rdx[®] QUIKSTOR Installation Guide



- 1 Turn off the computer
- 2 Mount the RDX QUIKSTOR in the PC. The Eject/Power LED should be on the lower right. Secure the unit by using the four mounting screws provided.
- 3 Connect the USB and power cables to the RDX QuikStor
- 4 Connect the USB cable to the host PC mother board or USB HBA. Pin 1 location is marked on the cable connector with a triangle (▼). Consult your motherboard/ HBA manual for the Pin 1 location on the mating USB connector
- 5 Turn on the computer

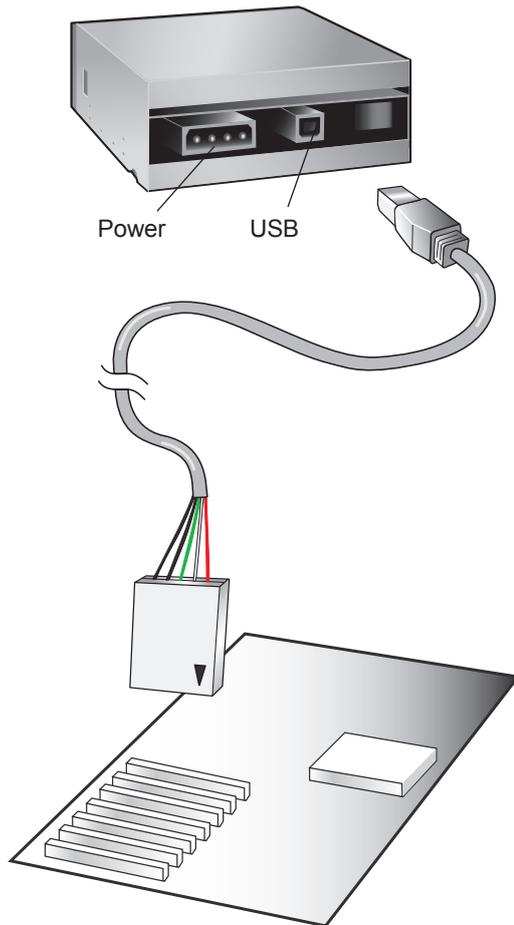

Warning:

- Connecting the USB Cable incorrectly to the PC will result in damage.
- Verify PIN layout on the motherboard versus cable connector PIN OUT.

+5VDC	1	2	PIN	SIGNAL	PIN	SIGNAL
DATA-			1	VCC	2	VCC
DATA+			3	USB0-	4	USB1-
GND			5	USB0+	6	USB1+
Key	9	10	7	GND	8	GND
			9	Key	10	USBOC

Product Registration

Register this product at
www.tandbergdata.com/register