

USER'S MANUAL

GB

NL

FR

D



DECLARATION OF CONFORMITY

Company:	TE-GROUP nv
Address:	Kapelsestraat 61, 2950 Kapellen - BELGIUM

declare, that the following equipment:

Product Name:	Quintezz LED 10W Floodlight
Product Type:	LED Floodlight

complies with the essential requirements, which are specified in the directive 2004/108/EC and 2006/95/EC on the approximation of the laws on the Member States relating to electromagnetic compatibility.

The product has been tested against the followings standards and specifications, applying versions valid in June, 2014:

EN 55015:2006+A1:2007+A2:2009
EN 61547:2009
EN 61000-3-2:2006+A1:2009+A2:2009
EN 61000-3-3:2008
EN 60598-2-5:1998
EN 60598-1:2008+A11:2009
EN 62031:2008
EN 62493:2010

CE

A handwritten signature in black ink, appearing to read 'Joseph Van Oosterum', written over a horizontal line.

Joseph Van Oosterum, CEO TE-Group, June 2014

ILLUSTRATIONS

Illustration I

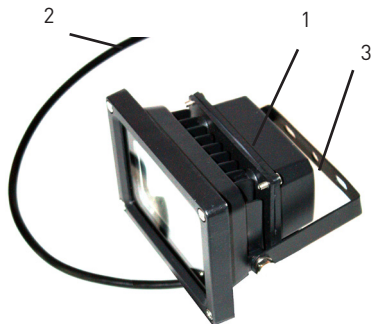


Illustration II





Illustration III

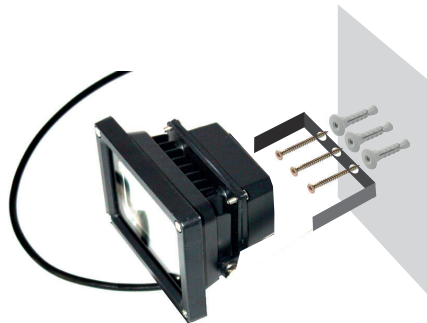

QUINTEZZ LED SENSOR FLOODLIGHT

See *Illustration I*

GB

- 1) Floodlight
- 2) Wiring cable + connector
- 3) Mounting bracket

INTRODUCTION

Your QUINTEZZ LED Floodlight is a unique indoor or outdoor lighting system for your home or business. A 10W LED light is installed which can be adjusted thanks to the bracket located at the backside

SAFETY PRECAUTIONS

- Do not install when it is raining
- Make sure you switch off the power before installation
- Make sure that the power wiring comes from a circuit with a suitable fuse or circuit breaker
- Make sure that there are no objects within a range of 80 cm from the Floodlight
- Do not remove the Floodlight head assembly from the base, so as to avoid any rotation
- The unit can only be installed horizontally, not vertically as shown on *illustration II*.


IMPORTANT

Some countries may require installation of this product by a qualified electrician. Please check the laws and requirements in your country. If the house wiring is of aluminum, consult with an electrician about proper wiring methods. Before proceeding the installation, TURN OFF THE POWER TO THE LIGHTING CIRCUIT AT THE CIRCUIT BREAKER OR FUSE BOX TO AVOID ELECTRICAL SHOCKS.

CHOOSE A MOUNTING LOCATION

- For the best results, fix the Floodlight on a solid surface at a height between 2.0 - 2.3 m.
- For outdoor installation: a location under eaves is preferable

WIRING INSTRUCTION

- 1) Switch off the power source
- 2) Remove the mounting bracket from the Floodlight. Drill the wall and screw the bracket onto the wall using suitable wall plugs and screws (not included). Check that the bracket is securely fitted onto the wall. See *illustration III*.
Note: at this stage, do NOT re-attach the Floodlight to the bracket.
- 3) Strip approximately 6-8 mm insulating part of the power cable and original wire (if needed). Before connection make sure that the wiring box gasket is firmly seated in its original place.
- 4) Connect the BROWN wire (live wire +) to the terminal block "L" mark.
Connect the BLUE wire (Neutral wire) to the terminal block "N" mark.
Connect the YELLOW/GREEN wire (earthing wire) to the terminal block  mark. (in case there is an earthing wire).
- 5) Re-attach the Floodlight to the bracket and secure the cable to the wall using suitable clips (not included). Ensure that the cable is not touching the body of the Floodlight and that there is sufficient slack in the cable to allow the Floodlight to be tilted and adjusted as required which should be done by grasping the metal body of the Floodlight and determining its position.

Note:

- Should be installed by an electrician or experienced person
- Avoid installation on objects that can move/shrink/expand ...
- When light does not turn on: make sure you made a correct "wiring connection", check the load and make sure there is 100-230V power.
- Consult your local service agent concerning safety, protections, regulations, ...

SPECIFICATIONS

Power requirement	85 -240 V / 50-60 Hz
Lighting Load	Max. 10W LED
Standby Current	0,45 Watt
Operating Current	0,10 Watt
Power Cord Requirement	H05RN-F, 3G, 1.0 mm ²
Waterproof	IP65
Temperature	-20° C to + 40°C
Mounting height	2,0 ~2.3 M, 1.8 to 2 M Wall Mount
Adjustable Angle	Vertical 180 °

SUPPORT

For all product related questions, please contact: support@quintezz.com or check our website www.quintezz.com for more information.

GUARANTEE

Copyright © Quintezz. Quintezz® is a registered trademark of TE-Group NV. The Quintezz® brand stands for superior quality products and excellent customer service. Therefore Quintezz® warrants this product to be free from defects in materials and workmanship for a period of **two (2) years** from the original purchase date of the product. The terms of this guarantee and the extent of responsibility of Quintezz® under this warranty can be downloaded from the website: www.quintezz.com.