



300Mbps Wireless Easy-N-Upgrader TEW-637AP

The 300Mbps Wireless Easy-N-Upgrader™ upgrades your old, perfectly functioning router, to high speed wireless n. Enjoy up to 12 times the speed and 6 times the coverage of a wireless g network

Eliminate wireless dead spots, seamlessly surf the Internet and help the environment by not throwing away your old router.

The compact 300Mbps Wireless Easy-N-Upgrader™ is designed around ease of use, performance and environmental friendliness. The latest in wireless encryption ensures wireless security. Advanced Multiple Input Multiple Output (MIMO) antenna technology eliminates wireless dead spots. Wireless Protected Setup (WPS) lets you integrate other WPS devices into your network quickly.

FEATURES


- A smaller and faster access point solution suitable for upgrading to wireless N
- Affordable wireless N device for easily migrating from wireless G and B networks
- Compatible with the 2.4GHz frequency work off of a single-band design
- Improves the data transfer speed by working with existing wireless G and B Networks
- Compliant with IEEE 802.11n (draft) standard, IEEE 802.11g, & 802.11b standards
- Universal wireless connectivity for seamless roaming between any 802.11-base network
- Up to 300Mbps data rate using 802.11n (draft) connection
- Support for 802.11e enhancements for wireless applications
- Wireless security support for WEP, WPA & WPA2
- Low Interference and high susceptibility guarantee reliable performance
- Supports WiFi Protected Setup (WPS) feature
- Supports Windows 95/98/NT/2000/XP/2003 server/Vista, Linux and Mac OS
- 2 antennas to support high speed performance and great coverage
- 3-Year Warranty

300Mbps Wireless Easy-N-Upgrader TEW-637AP

SPECIFICATIONS

Hardware	
Standards	• IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (Draft) and 802.11e, IEEE 802.11e QoS
Interface	• 1 x 10/100Mbps Auto-MDIX LAN port
LED Indicators	• Power, Link
Dimensions (LxWxH)	• 120 x 26 x 88 mm (4.7 x 1.0 x 3.4)
Weight	• 160 g (0.3lb)
Temperature	• 0° to 40° C (32° ~ 104° F)
Humidity	• -5%~95% (non-condensing)
Wireless	
Module Technique	• 802.11b: CCK (11 and 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps) • 802.11g: OFDM with BPSK, QPSK and 16/64-QAM sub-Carrier modulations
Antenna	• Built in Two PCB antennas
Frequency	• 2.412 - 2.462 GHz (North America) • 2.412 - 2.472 GHz (Europe)
Media Access Protocol	• CSMA/CA
Data Rate (auto fallback)	• 802.11n(draft): up to 300Mbps • 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps, 6 Mbps • 802.11b: 11Mbps, 5.5Mbps, 2Mbps, 1 Mbps
Output Power	• 802.11n (draft) : 14dBm (Typical) with HT20 & Ht40 • 802.11g: 15dBm (Typical) • 802.11b: 18dBm (Typical)
Receiving Sensitivity	• 802.11n (draft) : -70dBm (Typical) with Ht40 • 802.11g: -72dBm (Typical) @ 54Mbps • 802.11b: -84dBm (Typical) @ 11mpbs
Encryption	• 64/128-bit WEP (Hex & ASCII), WPA/WPA2, WPA • PSK/WPA2-PSK Encryption, WPA Enterprise WPA2 Enterprise
Channels	• 1-11 (North America) 1-13 (Europe)

NETWORKING SOLUTIONS

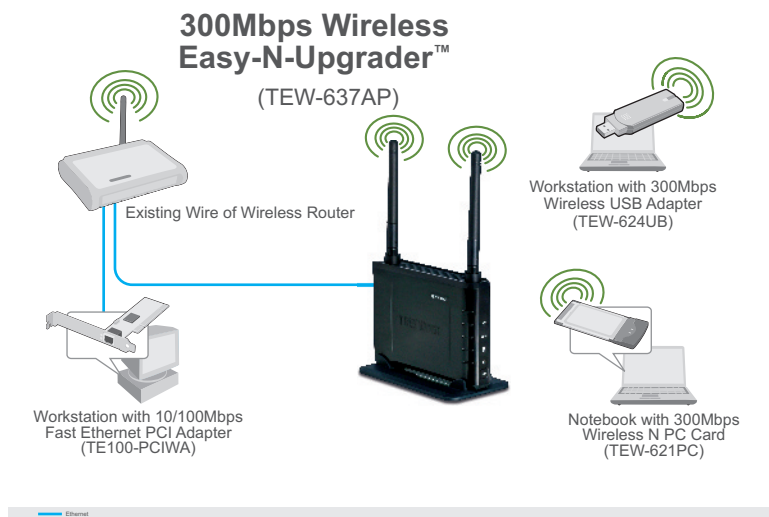

PACKAGE CONTENTS

- TEW-637AP
- Multi-Language Quick Installation Guide
- Utility user's guide and driver CD-ROM
- One Ethernet cable (0.6m 2 ft.)
- Power adapter (12v 1A)

RELATED PRODUCTS

TEW-621PC	Wireless N PC Card
TEW-623PI	Wireless N PCI Adapter
TEW-624UB	300Mbps Wireless N USB 2.0 Adapter

ORDERING INFORMATION

TRENDNET®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

