



# Managed VPN Routers

## Patton IPLink™ Models 2803, 2821, & 2835

*Patton IPLink Managed VPN Routers with integrated WAN ports optimize and secure information flows applying VPN encryption and QoS/CoS traffic management.*

### T1/E1, V.35 and X.21

*Select the integrated serial port of choice.*

### VPN Tunnels

*Standard IPSec with AH and ESP ensures maximum protection when traversing unsecured networks.*

### Strong Encryption

*DES, 3DES, and AES offer standards based encryption algorithms from 56 to 256 bits.*

### QoS/CoS Profiles

*Configurable burst tolerance, bandwidth guarantees plus reduce per flow traffic jitter as required by the application.*

### Configurable Security Profiles

*Built-in IP address and IP port filtering, ACLs and DoS attack detection creates a comprehensive security environment.*

### Enhanced IP Services

*DNS resolver and relay, NAT/NAPT, dynamic DNS, and DHCP server, eases integration.*

### SNMP/HTTP Management

*Easily manage the IPLink VPN Routers via a simple web browser interface.*

Patton's IPLink Managed VPN Routers with integrated serial ports are a family of next generation appliances that address both the security and the traffic prioritization needs of enterprises. VPN routers enable the secure communication of remote offices, home offices, and mobile users across insecure IP networks such as the Internet. IPLink VPN Routers take it one step further and integrate quality of service (QoS) to optimize business traffic flows plus include a serial port to eliminate the need for external converters.

IPLink VPN Routers implement a comprehensive security environment. It all starts with IPSec. By supporting ESP as well as AH, IPLink VPN Routers provide data integrity, authentication, anti-replay and data confidentiality to any traffic flow. DES, 3DES, and AES provide standard encryption up to 256 bits. Firewall capabilities of the IPLink VPN Routers include Access Control Lists (ACLs), IP address and port filtering, and protection against Denial of Service (DoS) attacks. Likewise, PPP/PPPoE protocols include support

for PAP and CHAP authentication.

QoS features include ToS/DiffServ marking and the configuration of eight service class tags per IEEE 802.1p/Q. With traffic scheduling and shaping, create dedicated bandwidth guarantees, configurable burst tolerance, and policing to include excess traffic discard. IP, PPP, and Frame Relay fragmentation is configurable to help minimize jitter in traffic flows.

Advanced IP features include RIPv1 & RIPv2 routing and static route configuration. Static and dynamic NAT, NAPT, DNS resolver and relay, dynamic DNS, and DHCP server further add to the capabilities of the IPLink VPN Router. Frame Relay support is included standard. All IPLink VPN routers can be managed via a web browser (HTTP), command line interface (Telnet or Console), or an SNMP management platform.

Visit [www.patton.com](http://www.patton.com) for more information.



*Special Rates Available  
Call for Details*




**IPLink 2835**

## Typical Application

IPLink VPN Routers are next generation security appliances that address the needs of business users by integrating QoS and WAN interfaces into a one-box solution.

Service Providers can take advantage of the built in QoS to provide both VPN services as well as managed bandwidth services using IPLink VPN Routers.

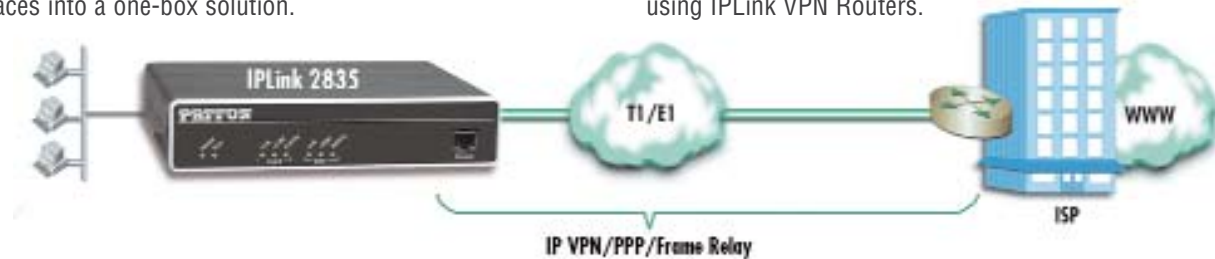

## Features

### ✓ VPN tunneling secures IP network traversal.

- IPSec encryption supporting AH and ESP provides data integrity, authentication, anti-replay and data confidentiality.

### ✓ Strong encryption protects data.

- With support for DES, 3DES, and AES, data can be encrypted using 56 to 256-bit algorithms, right-sizing security to resources.

### ✓ QoS/CoS profiles

- QoS/CoS guarantees traffic priority.
- ToS/DiffServ labeling
- Eight service class tags per IEEE 802.1p/Q
- Per flow bandwidth guarantees
- Hierarchical traffic classes
- Configurable burst tolerance
- Excess traffic discard
- Configurable packet and frame fragmentation to minimize jitter.

## Specifications

### WAN Ports

**2803** One T1/E1. (E1—G.703/G.704 with HDB3 and AMI encoding. T1—ANSI T1.403 & AT&T TR54016 with AMI coding/D4 framing or B8ZS coding/ESF framing. RJ-48C connector and/or dual BNC available.

**2835:** V.35 DTE on DB-25F Connector

**2821:** X.21 DTE or DCE on DB-15F Connector

### Ethernet Ports

Two 10/100Base-T ports (RJ-45 connector); auto-negotiating; half or full duplex operation with built-in MDI-X

### Management

CLI via Telnet Ethernet or RS-232 Console Port (EIA-564); TFTP for Software upgrade and configuration upload; SNMPv1; HTTP/web browser

### Protocols

IP (RFC 741), TCP (RFC 793), UDP (RFC 768), ICMP & ICMP Redirect (RFC 792), ARP (RFC 826). IP Router with RIPv1 (RFC 1058), RIPv2 (RFC 2453), programmable static routes. Integrated DHCP Server (RFC 2131), DNS Relay (RFC 1631), IEEE 802.1p VLAN Tagging, NAT/NAPT (RFC 1631/2391)

### Security

IPSec including AH and ESP. DES, 3DES, and AES encryption. Access Control Lists (ACLs). IP port and address filtering both by source and destination. DoS Detection. Password protected system management with a username/password for console and virtual terminal.

### Power Supplies

External universal 90–260 VAC input or 48 VDC input. (Optional Internal universal 90–260 VAC input.)

### Compliance

**CE Mark; Safety:** UL60950-1, CSA 22.2 6095001, IEC/EN60950-1. Universal AC units are US NRTL Listed; **EMC**

**Emissions:** FCC Part 15 Class A; EN55022 Class A; **EMC Immunity:** EN55024

### Environment

Operating temperature: 0–40°C (32–104 °F); Humidity: 5–80% non-condensing

### Dimensions & Weight

7.3W x 1.6H x 6.1D in.

(18.5H x 4.1W x 15.5D cm)

30.5 oz./500g (models with internal power); 24.4 oz./400g (models with external power; no power supply)

## Ordering Information

2803/UI  
2803/EUI

2821/UI  
2821/EUI

2835/UI  
2835/EUI

**PATTON**  
Electronics Co.

7622 Rickenbacker Drive  
Gaithersburg, MD 20879 USA

Phone +1-301-975-1000

Fax +1-301-869-9293

E-mail [sales@patton.com](mailto:sales@patton.com)

Web [www.patton.com](http://www.patton.com)

07M2800-SER-DS2

Patton is a registered trademark and IPLink is a trademark of Patton Electronics Company in the United States and other countries.