



Quick Start Guide



Bluetooth Keyboard

MODEL: PNDKBABT10

PENDO®

Product Features

This unique Bluetooth keyboard with a retractable stand is specially designed for the PendoPad, Apple iPad, Apple iPhone, Android Tablets, Windows Tablets & Bluetooth enabled Smartphones.

It has a silent design, which will not affect other users around you.

The built-in Lithium battery allows up to 120 hours of use between charges.

Specifications

Bluetooth Standard	Bluetooth V 3.0
Working Distance	10 meters
Modulation System	FHSS 2.4G
Transmitting Power	Class 2
Working Voltage	3.0V -5.0V
Working Current	<2.0 MA
Standby Current	2.5MA
Sleeping Current	<200UA
Charging Current	>200MA
Standby Time	90 days
Uninterrupted Working	120 hours
Charging Time	2.5-3 hours
Li-ion Battery Capacity	450mAh, 3.7V
Charging Cycles	5 million times
Working Temperature	-20~+55°C
Storage Temperature	-40~+70°C
OS Support	

Android 3.0 and above

Apple IOS6 (iPhone / iPad)

Windows XP

Windows Vista

Windows 7

Windows 8

Windows Mobile 6.5 and above

Note: Some functionality may not be supported by all operating systems



Boxed Contents

1. Bluetooth Keyboard
2. USB Charging Cable
3. User Manual
4. Warranty Card

Opening the Stand

1. Slide the stand out from under the keyboard as shown below.



2. Lift the stand up from its support base by holding the end in the middle and gently lifting.
Note: the stand is secured by magnets, so there will be some initial resistance.
3. Hold the stand at the desired angle, and then raise the inner support so that it can be inserted into the desired slot to hold the stand in position.



4. Once the stand is securely in place, your mobile device can be safely placed on the stand.

Note: Excess force should not be applied to the stand because this could cause damage to the keyboard and any device being held up by the stand.

Connecting the Bluetooth Keyboard with a Device

Connecting to an Android Tablet

1. Press the Power and Connect button for about 5 seconds until the power light has come on and then started flashing blue, to indicate that the keyboard is advertising itself via Bluetooth.
2. Access Android Settings and touch on the “Bluetooth” setting and switch it On (see image 1).
3. Once the tablet has finished finding all Bluetooth devices in the vicinity, select “Bluetooth keyboard” by touching the entry in the list (see image 2).



Image1

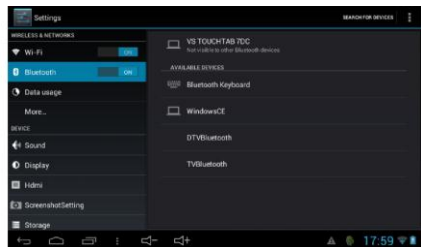


Image2

4. Type the number combination that is shown in the popup window on the keyboard and press the Enter / Return key, in order to finish pairing with the keyboard (see image3).
5. The keyboard will now show a status of “Connected” (see image4).

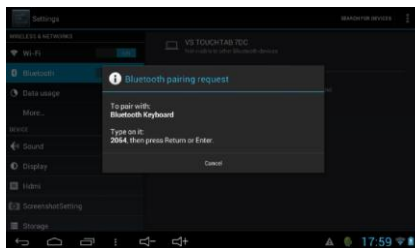


Image3



Image4


6. The keyboard has now been successfully paired and whenever Bluetooth is enabled on the tablet and the keyboard is turned on, it will automatically connect after a few seconds from now on.

Connecting to an iPad or iPhone

1. Press the Power and Connect button on the keyboard for about 5 seconds until the power light has come on and then starts flashing blue, to indicate that the keyboard is advertising itself via Bluetooth.
2. On the iPad / iPhone, touch the “Settings” icon to enter the settings options.
3. Touch on the “Bluetooth” option (see below).




Touch the “Settings” icon

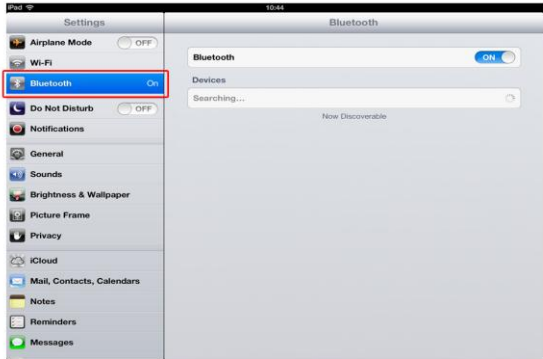


Touch to access Bluetooth settings

4. Set Bluetooth to On and the iPad / iPhone will search for all Bluetooth devices (see below).
5. Once the tablet has finished finding all Bluetooth devices in the vicinity, select “Bluetooth keyboard” by touching the entry in the list (see below).
6. Type the password that is shown in the popup window on the keyboard and press the Enter / Return key, in order to finish pairing with the keyboard (see below).

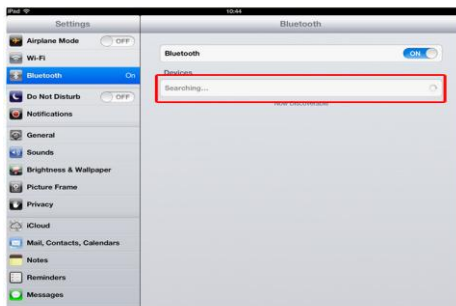

The iPad / iPhone will search for all Bluetooth devices

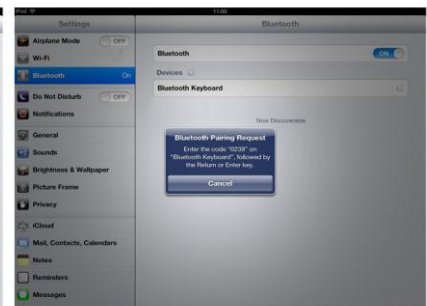

Touch the Bluetooth keyboard and type the password shown on the keyboard

7. The keyboard will now be successfully paired and whenever Bluetooth is enabled on the iPad / iPhone and the keyboard is turned on, it will automatically connect after a few seconds from now on.

Note: To turn the keyboard on, hold down the Connect and Power button for a few seconds until the Bluetooth light appears. This light will disappear as soon as the keyboard has connected to an already paired device, or if no device is found, it will automatically turn off after 5 seconds.

Function Switching

There are a number of user Function keys, which can be enabled by pressing the FN key before pressing them.

1. Press FN+ (F1-F12) enables the functions of F1-F12 within Windows;
2. Press FN + ESC enables the function of Web Searching on Windows;
3. Entering Command + Space allows you to switch between different languages and input methods.

Charging

When the keyboard is running low on power, the charge indicator will start flashing. This means that it is time to charge the keyboard.

Charging Procedure

1. Use the USB charging cable provided. Connect it to a USB charger, and then connect the other end of the plug into the keyboard as follows.



2. The charge indicator will glow red, indicating it is charging. After charging has finished, the red indicator will turn off. Charging time is approximately 2.5 - 3 hours.

Storage

1. When you have finished using your keyboard or are packing it away, please don't forget to turn it off, in order to extend battery life.
2. When the keyboard is not going to be used for an extended period of time, please don't forget to charge your keyboard to about 50% of maximum before storage in order to make your keyboard's lithium battery last longer.

Safety Instructions

1. Keep the keyboard away from sharp objects that could damage it.
2. Do not put heavy objects on the keyboard.
3. Do not place batteries or devices on or in heating devices, such as microwave ovens, cookers, or radiators. Batteries may explode when overheated.
4. Do not stretch, twist or apply force to the keyboard.
5. The Standby Time of the batteries may vary due to different environmental influences.
6. To clean the product, gently wipe the product using a moist cotton cloth; the use of other chemical cleaning is prohibited unless they are specifically designed for this purpose. This product should be kept away from water droplets splashes, so cups filled with liquids should not be placed near the product. Do not use alcohol, thinners or petrol to clean the display.
7. Do not handle a damaged or leaking Lithium Ion (Li-Ion) battery. For safe disposal of your Li-Ion batteries, contact your nearest authorised recycling centre.

Troubleshooting

If you are unable to connect the Bluetooth keyboard to a computer, or the keyboard is working in an unconventional fashion. Please follow the steps below:

1. Before you install your Bluetooth keyboard, make sure that you have gone through the Bluetooth Dongle installation procedure on your computer, and that the Bluetooth facility is turned on within the operating system.
2. Press the Power and Connect button for about 5 seconds until the power light has come on and then started flashing blue, to indicate that the keyboard is advertising itself via Bluetooth.
3. Make sure that the keyboard is within the effective operation distance of 10 meters.
4. Make sure that there has been no change to the Bluetooth settings. If anything has changed, try re-pairing the keyboard.

5. If your Bluetooth is connecting to other Bluetooth products, please check that the speed of the Bluetooth facility is enough to allow connection to multiple devices at the same time.
6. Check that the keyboard is fully charged.
7. Please make sure that your Bluetooth Dongle is not damaged in any way.

Every time you turn off the keyboard and then turn on it again, or reboot the computer, it seems like the keyboard isn't responding.

1. It can take up to 23 seconds, for the keyboard to connect to a PC because the correct drivers need to be loaded.

Tips

When your battery is low, the charging light on the keyboard will begin flashing. In order to prevent interruption to your work, you should connect the keyboard to a charging source in order to keep working.

If you do not use the keyboard for 15 minutes, it will enter into a dormant state. It will reawaken as soon as you press any key and after around 3 seconds, your keyboard will be ready to use again.



Support

For support on your product please email support@btaccessorysupport.com.com, providing detailed information about the problem you are experiencing.

We also provide English-language Technical Support to its customers, which can be contacted by calling +44 (0) 844 997 6556 (calls are charged at 5p per minute). This support line is available from 9:30am to 6:00pm GMT Monday to Friday.

If you experience difficulty during the installation or subsequent use of a product, you should contact the Technical Support department prior to servicing your device.

Copyright

All rights reserved. No part of this manual may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission from the copyright holder. According to copyright law, no recorded data may be used for purposes other than personal enjoyment without permission from the copyright holder.

Trademarks

Apple, iPhone and iPad are registered trademarks of Apple, Inc.

Android is a registered trademark of Google, Inc.

Bluetooth® is a registered trademark of the Bluetooth SIG, Inc. worldwide.



Correct disposal of this product

(Waste Electrical & Electronic Equipment)

(Applicable in the European Union and other European countries with separate collection systems)

This marking on the product, accessories or literature indicates that the product and its electronic accessories (e.g. charger, headset, USB cable) should not be disposed of with other household waste at the end of their working life.



To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate these items from other types of waste and recycle them responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local council office, for details of where and how they can take these items for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product and its electronic accessories should not be mixed with other commercial wastes for disposal.

This EEE is compliant with RoHS

Correct disposal of batteries

(Applicable in the European Union and other European countries with separate battery return systems)

This marking on the battery, manual or packaging indicates that the batteries in this product should not be disposed of with other household waste at the end of their working life.



Where marked, the chemical symbols Hg, Cd or Pb indicate that the battery contains mercury, cadmium or lead above the reference levels in EC Directive 2006/66. If batteries are not properly disposed of, these substances can cause harm to human health or the environment.

To protect natural resources and to promote material reuse, please separate batteries from other types of waste and recycle them through your local, free battery return system.

The rechargeable battery built into this product is not user replaceable.
For information on its replacement, please contact support.

PENDO®

Pendo Industries Pty Ltd | PO Box 827, Mount Waverley VIC 3149
1300 275 645 | www.pendo.com.au