


INTERNET-READY
MODEM PROTECTION




SURGE PROTECTOR

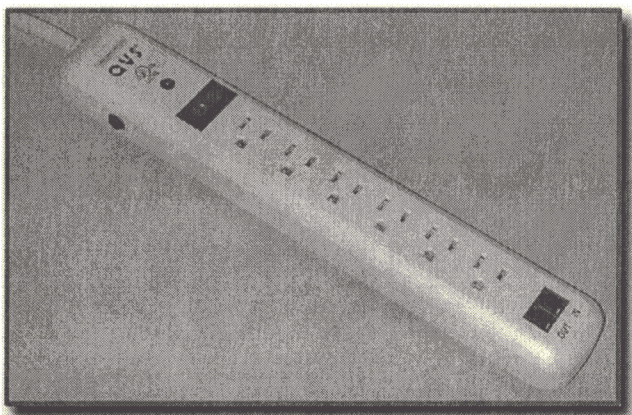

POWER PRODUCTS

PP114M FEATURES

- Protect your Equipment Against Power Surge and Spike Damages
- Power ON Master Switch with **Circuit Breaker Reset for Overload Protection**
- EMI & RFI Filtering Minimizes Line Noise with Fax and Phone Protection
- Solder Free Integral Bus Conductor with Six 3-wire Grounded Outlets
- Light Gray with Durable ABS Wall Mountable Plastic Case
- 6ft Heavy Duty Power Cord
- UL 1449 and 497A Listed

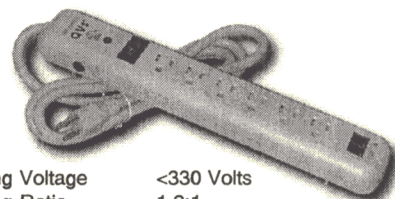

SPECIFICATIONS:

Rating	125vAC/15a (1875 Watts)	Max Clamping Voltage	<330 Volts
Max Surge Voltage	6000 Volts	Max Clamping Ratio	1.2:1
Max Spike Current	4500Amps - 25°C	Response Time	<1 Nanosecond
Energy Dissipation	(90 x 3) 270 Joules	Temperature Range	-40°C to +70°C
Energy Dissipation (RJ11)	72 Joules	Voice Rejection	0/5-30MHz
Attenuation	15 - 40dB		

(6) 3 Prong Outlets, (2) RJ11F
PP114M 6 Outlets + RJ11 UPC: 0 37229 77115, One Year Warranty

Call us for Pricing & Availability

Need to Know More? Visit us at <http://www.qvs.com>



800 622-9606

EAST FAX 734-641-6767



800 344-3371

WEST FAX 702-228-3671

WWW.QVS.COM

ALL NAMES AND TRADEMARKS ARE PROPERTY OF THEIR RESPECTIVE COMPANIES

Technical Support, please call: (734) 641-6700 9AM-5PM EST / (702) 228-3670 10AM-6PM PST or email to: techsupport@qvs.com

REV MAY 21, 1999