

# MA9.6K

Lightweight, High Power, High Performance Power Amplifier

## features


- ▶ Worldwide mains operating voltage
- ▶ Power Factor Correction
- ▶ Over-temperature forecasting
- ▶ Thermal, short-circuit and overload protection
- ▶ Temperature controlled air cooling system
- ▶ Clip and permanent signal limiter
- ▶ Digital gain attenuation
- ▶ User selectable maximum output power
- ▶ User selectable maximum mains current draw
- ▶ PC remote control, monitoring and diagnostics

## applications

- ▶ Live sound reinforcement
- ▶ Fixed installations

The MA9.6K is one of three models extending the range of the renowned MA Series power amplifiers. The MA9.6K utilises the Pulse Width Modulation principle in combination with a high efficiency two stage switching power supply to deliver true class D operation with unparalleled sonic performance and hitherto unobtainable power delivery. The MA9.6K operates at an astonishing 95% efficiency virtually regardless of output power, occupies only 1U of rack space and is a mere 12kg (26.5lbs) in weight.

## overall dimensions

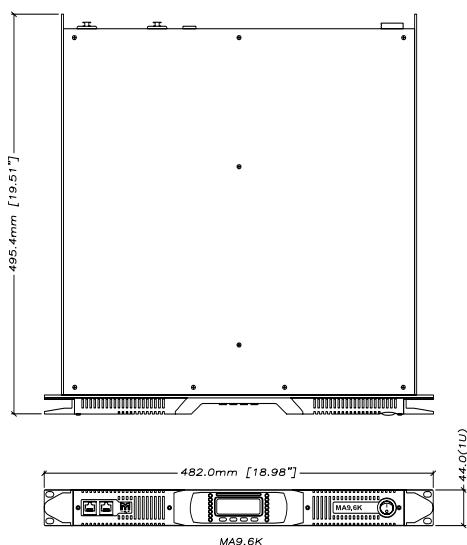

## technical specifications

### MAX OUTPUT POWER

EIA AT 1KHz AND 1% THD

|                |       |
|----------------|-------|
| 8Ω PER CHANNEL | 1500W |
| 4Ω PER CHANNEL | 3000W |
| 2Ω PER CHANNEL | 4800W |
| 16Ω BRIDGED    | 3000W |
| 8Ω BRIDGED     | 6000W |
| 4Ω BRIDGED     | 9600W |

### DISTORTION

THD FROM 0.1W TO FULL POWER < 0.05% (typically)

INTERMODULATION SMPTE < 0.05% (typically)

INTERMODULATION DIM 30 < 0.05% (typically)

S/N RATIO > 110dBA (20Hz to 20KHz)

### DAMPING FACTOR (8 ohm)

> 5000 (20Hz to 20KHz)

### OUTPUT IMPEDANCE

60mΩ (User Selectable with

KDSP option)

### SLEW RATE

50V/μs

### INPUTS

GAIN SELECTABLE (dB) 26, 29, 32, 35

IMPEDANCE 10kΩ

### FRONT PANEL

DISPLAY Interactive LCD Matrix

### INDICATORS

2 x Multi-function 7 segment

LED Bargraph

### MENU NAVIGATION

4 x Digital Push Button

### NETWORK

2 x RJ45

### DATA STORAGE & TRANSFER

Smart Card Reader

### REAR PANEL

#### INPUT CONNECTORS

Neutrik XLR / 6.3mm (0.25ins)

#### OUTPUT CONNECTORS

Jack Combo

#### LINK SWITCH

Neutrik Speakon

#### DATA PORT

Channel A-B Link

RS485 Via RJ45

### POWER

OPERATION VOLTAGE AC: 95-265V (50/60Hz)

### DIMENSIONS

WIDTH 483mm (19ins)

HEIGHT 44mm (1.75ins) 1U

DEPTH 475mm (18.7ins)

### WEIGHT

12kg (26.5lbs)

Century Point, Halifax Road, Cressex Business Park,  
High Wycombe, Buckinghamshire HP12 3SL, England.  
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669  
E-mail: info@martin-audio.com  
All information is Copyright © 2007 Martin Audio Ltd.

