

LINDY®

COMPUTER CONNECTION TECHNOLOGY

Wireless Audio Box

User Manual

English



LINDY No. 20427



www.LINDY.com

© LINDY ELECTRONICS LIMITED & LINDY-ELEKTRONIK GMBH - FIRST EDITION (JAN 2009)



Introduction

Thank you for purchasing the Wireless Audio Box. Please read this user manual carefully for the proper use of the Wireless Audio Box and keep it for future reference.

Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any mean, electronic or mechanical, for any purpose, without the express written prior permission of the seller.

Trademarks

Windows, Microsoft and Windows Vista are registered trademarks of Microsoft Corporation.

Mac is registered trademark of Apple Inc.

Other trademarks and registered trademarks are used herein for identification purpose only and belong to their respective companies.

EU DECLARATION OF CONFORMITY

This product is carrying the CE-Mark in accordance with the related European Directives.



Features

- Stream music on your PC to your stereo without running wires.
- CD quality 16-bit/44.1 kHz stereo.
- Up to 150 feet (50 meters) range.
- Get started in 3 steps-- **Connect**, **Power on** and **Play**.
- No software required.
- RCA and 3.5mm jack audio output.

System Requirements


- Windows® 2000/XP/Windows Vista™ or Mac OS® 10.4 or later
- An available USB port on PC or Mac
- Multimedia software installed on PC or Mac

Package Contents

- | | |
|---------------------------------|----|
| • Wireless Audio Box | 1x |
| • USB dongle | 1x |
| • USB power adapter | 1x |
| • RCA to 3.5mm jack audio cable | 1x |
| • User manual | 1x |


Initial set up for the Wireless Audio Box

Step 1




Connect the USB dongle to the USB port on your PC or MAC.

Step 2




or



Connect the audio cable to the RCA or 3.5mm jack to Wireless Audio Box.


Step 3



Connect the other side of the audio cable to the RCA or 3.5mm jack of the stereo device, such as speakers, headsets, etc.

English Manual

Step 4



Connect the supplied USB power adapter to the Wireless Audio Box and plug the adapter into power outlet.

Step 5



Press the power on button on the Wireless Audio Box, once the Wireless Audio Box is activated, the green LED will be blinking regularly.

Step 6

Choose the USB Speaker as default audio output device for the first time use.

➤ For Windows®:



Open the “*Sounds and Audio Devices Properties*” and choose the **USB speaker** as default Sound playback device.


➤ For Mac OS®:







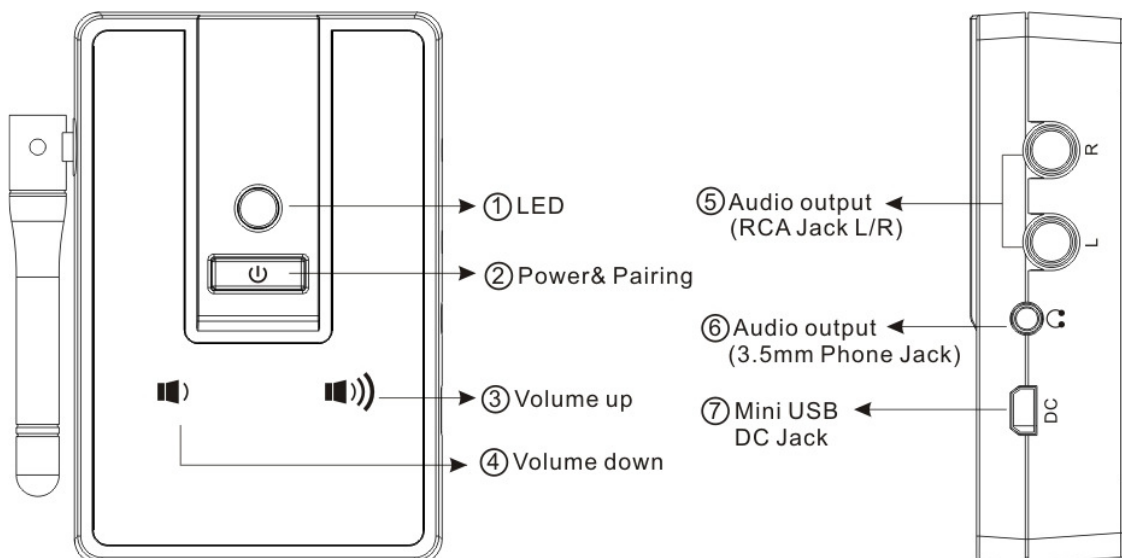

Open the “*System Preferences → Sound*” and choose the **USB speaker** as default sound output device.

Now, play a song on your computer and enjoy the convenience of wireless transmission!

Parts descriptions




English Manual

	Icons	Keys	Function description
1	LED	Mode indicator	1. Working mode: green LED blinks regularly. 2. Pairing mode: green LED blinks faster.
2		1. Power On/Off 2. Pairing	1. Press to turn ON and OFF. 2. Press and hold the button 3 seconds to activate the pairing mode. (green LED blinks faster) Note: Implement the pairing in case of serious cross-interferenced.
3		Volume up	Click to adjust volume level.
4		Volume down	Click to adjust volume level.
5		Audio output	RCA jack L/R.
6		Audio output	3.5mm audio jack.
7		Power source	5V DC adapter.

Note: The green LED on Wireless Audio Box will turn off once losing the connection to the USB dongle.


How to pair the Wireless Audio Box

Step 1



Press and hold the button for 3 seconds until the green LED on Wireless audio Box blinks faster.

Step 2



Press the pairing button on USB dongle, the green LED on USB dongle will light up. Once the Wireless Audio Box retrieve the new ID, the green LED on USB dongle will resume blinking regularly.

Specifications

Frequency	2400MHz~2483MHz
Channel number	38
Data rate	4M bps
Wireless range	Up to 150 feet (50 meters)
Audio resolution	16-bit / 44.1KHz
Interface	USB 1.1
Power Type	USB Power 5V
Power Consumption	Working:45mA
Transmitter Dimensions	75 x 19 x 10.3mm (W x H x D)
Receiver Dimensions	90 x 70.65 x 26mm (W x H x D)
Transmitter Weight	Approx. 15g
Receiver Weight	Approx. 90g