

Keysight 87405C Pre-amplifier



Operating and
Service Manual

Notices

Copyright Notice

© Keysight Technologies 2006 - 2015

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Keysight Technologies as governed by United States and international copyright laws.

Manual Part Number

87405-90001

Edition

Edition 3, Aug 14, 2015

Printed in:

Printed in Malaysia

Published by:

Keysight Technologies
Bayan Lepas Free Industrial Zone,
11900 Penang, Malaysia

Technology Licenses

The hardware and/or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

Declaration of Conformity

Declarations of Conformity for this product and for other Keysight products may be downloaded from the Web. Go to <http://www.keysight.com/go/conformity>. You can then search by product number to find the latest Declaration of Conformity.

U.S. Government Rights

The Software is "commercial computer software," as defined by Federal Acquisition Regulation ("FAR") 2.101. Pursuant to FAR 12.212 and 27.405-3 and Department of Defense FAR Supplement ("DFARS") 227.7202, the U.S. government acquires commercial computer software under the same terms by which the software is customarily provided to the public. Accordingly, Keysight provides the Software to U.S. government customers under its standard commercial license, which is embodied in its End User License Agreement (EULA), a copy of which can be found at <http://www.keysight.com/find/sweula>. The license set forth in the EULA represents the exclusive authority by which the U.S. government may use, modify, distribute, or disclose the Software. The EULA and the license set forth therein, does not require or permit, among other things, that Keysight: (1) Furnish technical information related to commercial computer software or commercial computer software documentation that is not customarily provided to the public; or (2) Relinquish to, or otherwise provide, the government rights in excess of these rights customarily provided to the public to use, modify, reproduce, release, perform, display, or disclose commercial computer software or commercial computer software documentation. No additional government requirements beyond those set forth in the EULA shall apply, except to the extent that those terms, rights, or licenses are explicitly required from all providers of commercial computer software pursuant to the FAR and the DFARS and are set forth specifically in writing elsewhere in the EULA. Keysight shall be under no obligation to update, revise or otherwise modify the Software. With respect to any technical data as defined by FAR 2.101, pursuant to FAR 12.211 and 27.404.2 and DFARS 227.7102, the U.S. government acquires no greater than Limited Rights as defined in FAR 27.401 or DFAR 227.7103-5 (c), as applicable in any technical data.

Warranty

THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROVIDED "AS IS," AND IS SUBJECT TO BEING CHANGED, WITHOUT NOTICE, IN FUTURE EDITIONS. FURTHER, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, KEYSIGHT DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED, WITH REGARD TO THIS MANUAL AND ANY INFORMATION CONTAINED HEREIN, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. KEYSIGHT SHALL NOT BE LIABLE FOR ERRORS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, USE, OR PERFORMANCE OF THIS DOCUMENT OR FOR ANY INFORMATION CONTAINED HEREIN. SHOULD KEYSIGHT AND THE USER HAVE A SEPARATE WRITTEN AGREEMENT WITH WARRANTY TERMS COVERING THE MATERIAL IN THIS DOCUMENT THAT CONFLICT WITH THESE TERMS, THE WARRANTY TERMS IN THE SEPARATE AGREEMENT SHALL CONTROL.

Safety Information

CAUTION

A CAUTION notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in damage to the product or loss of important data. Do not proceed beyond a CAUTION notice until the indicated conditions are fully understood and met.

WARNING

A WARNING notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in personal injury or death. Do not proceed beyond a WARNING notice until the indicated conditions are fully understood and met.

Compliance Notices and Regulatory Information

Compliance with Electromagnetic Compatibility (EMC)

	IEC 61326:1997
	EN 61326:1997
This ISM device complies with Canadian ICES-001	
Line voltage interrupt (1 cycle, 100%)	IEC/EN 61000-4-11
Surge test (1.2 x 50 μ s, 0.5 kV line-line, 1 kV line-ground)	IEC/EN 61000-4-5
Electrical fast transients (0.5 kV signal lines, 1 kV power lines)	IEC/EN 61000-4-4
Radiated emissions	CISPR 11, Class A EN55011
Radiated immunity (3 V/m, 80 - 1000 MHz)	IEC/EN 61000-4-3
Conducted emissions	CISPR 11, Class A EN55011
Conducted immunity (3 V, 0.15 - 80 MHz)	IEC/EN 61000-4-6
ESD (4 kV contact discharge, 8 kV air discharge)	IEC/EN 61000-4-2

Regulatory markings

 The CE mark is a registered trademark of the European Community. This CE mark shows that the product complies with all the relevant European Legal Directives.	 This symbol indicates the time period during which no hazardous or toxic substance elements are expected to leak or deteriorate during normal use. Forty years is the expected useful life of the product.
 This instrument complies with the WEEE Directive (2002/96/EC) marking requirement. This affixed product label indicates that you must not discard this electrical or electronic product in domestic household waste.	This instrument is Class A suitable for professional use and is for use in electromagnetic environments outside of the home. A급 기기 (업무용 방송통신기자재) 이 기기는 업무용(A급) 전자파적합기기로서 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정외의 지역에서 사용하는 것을 목적으로 합니다.  KCC-REM-ATi-WN87405C

Waste Electrical and Electronic Equipment (WEEE) Directive 2002/96/EC

This instrument complies with the WEEE Directive (2002/96/EC) marking requirement. This affixed product label indicates that you must not discard this electrical or electronic product in domestic household waste.

Product category:

With reference to the equipment types in the WEEE directive Annex 1, this instrument is classified as a “Monitoring and Control Instrument” product.

The affixed product label is as shown below.



Do not dispose in domestic household waste.

To return this unwanted instrument, contact your nearest Keysight Service Center, or visit <http://about.keysight.com/en/companyinfo/environment/takeback.shtml> for more information.

Sales and Technical Support

To contact Keysight for sales and technical support, refer to the support links on the following Keysight websites:

- www.keysight.com/find/amplifiers
(product-specific information and documentation updates)
- www.keysight.com/find/assist
(worldwide contact information for repair and service)

Table of Contents

Compliance Notices and Regulatory Information	3
Compliance with Electromagnetic Compatibility (EMC)	3
Regulatory markings	3
Waste Electrical and Electronic Equipment (WEEE) Directive 2002/96/EC	4
Sales and Technical Support	4
1 Introduction	
Product Overview	12
Key features of the 87405C pre-amplifier	13
Application	13
2 Specifications	
General Specifications	16
Specifications	16
Physical specifications	17
Environmental Specifications	18
3 Operating Guides	
Installation	20
Initial inspection	20
Operating Instructions	21
Operator's check	21
Performance Tests	22
Service and Maintenance	23
Service	23
Maintenance	23
Replaceable Parts	24

THIS PAGE HAS BEEN INTENTIONALLY LEFT BLANK.

List of Figures

Figure 1-1	87405C pre-amplifier	12
Figure 1-2	Low level signal measurement test setup	13
Figure 3-1	Equipment setup using network analyzer	21
Figure 3-2	Drawings of replaceable parts for the 87405C	24

THIS PAGE HAS BEEN INTENTIONALLY LEFT BLANK.

List of Tables

Table 1-1	General information of the 87405C pre-amplifier	12
Table 2-1	87405C specifications	16
Table 2-2	87405C physical specifications	17
Table 2-3	87405C environmental specifications	18
Table 3-1	Replaceable parts for the 87405C	24

THIS PAGE HAS BEEN INTENTIONALLY LEFT BLANK.

1 Introduction

Product Overview 12

This chapter provides an overview of the Keysight 87405C Pre-amplifier.

Product Overview

The Keysight 87405C pre-amplifier offers reliable gain and low noise figure to measurement systems, thus improve overall system performance and reduce systematic errors. With the ability to be powered directly from the instrument probe-port, it eliminates the need for a separate power supply.

The 87405C is ideal for use as the front end pre-amplifier for a variety of Keysight instruments such as PSA, ESA as well as the MXA series of spectrum analyzer. The rugged Type-N connectors make the 87405C well suited for various field applications.



Figure 1-1 87405C pre-amplifier

Table 1-1 shows the general information of the 87405C pre-amplifier.

Table 1-1 General information of the 87405C pre-amplifier

Model	Frequency range	Small signal gain	Connector type
87405C	100 MHz to 18 GHz	25 dB	Type N (m), (f)

Key features of the 87405C pre-amplifier

- DC bias via probe-power port on Keysight instruments eliminates the need for additional power supply
- Low noise figure of 4.5 dB and high gain of 25 dB reduce total system noise figure for better equipment dynamic range and sensitivity
- Compact design and portability allows usage in the field (installation and maintenance applications)
- High P1dB of 15 dBm increases available power from network analyzer and signal source

Application

Low level signal measurement

In low level signal measurement, the sensitivity of the measurement system can be improved by adding a pre-amplifier into the system as illustrated in [Figure 1-2](#).

Total noise figure of the system can also be reduced using a pre-amplifier as the noise figure of the system is dominated by the noise figure of the pre-amplifier.

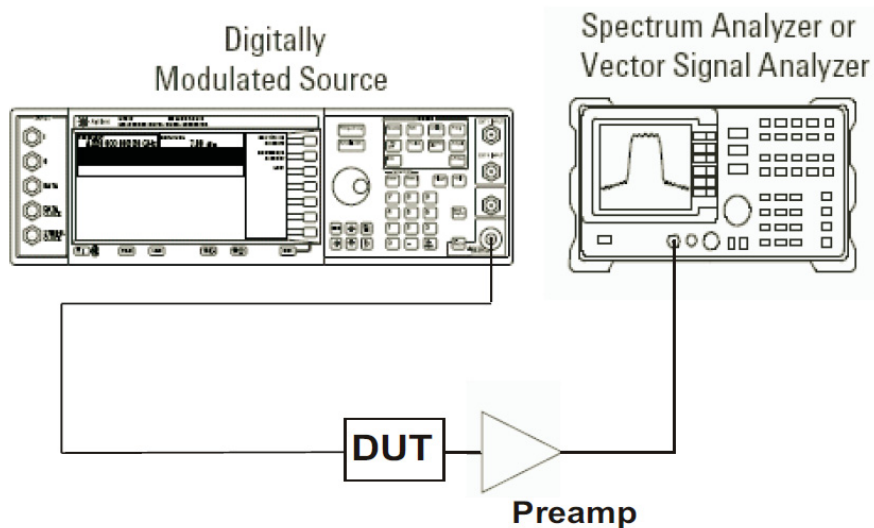


Figure 1-2 Low level signal measurement test setup

THIS PAGE HAS BEEN INTENTIONALLY LEFT BLANK.

2 Specifications

General Specifications	16
Environmental Specifications	18

This chapter provides the specifications of the 87405C pre-amplifier.

General Specifications

Specifications

Specifications refer to the performance standards or limits against which the 87405C is tested.

Typical characteristics are included for additional information only and they are not specifications. These are denoted as "typical", "nominal", or "approximate", and are printed in italic.

Table 2-1 87405C specifications

Specification	87405C	
Frequency range	100 MHz to 4 GHz	4 GHz to 18 GHz
Gain, S_{21}	25 dB	
Flatness	± 1.5 dB	
P1dB	15 dBm	14 dBm
Noise figure:		
– 100 MHz to 500 MHz	7 dB	
– 500 MHz to 4 GHz	6 dB	
– 4 GHz to 18 GHz	4.5 dB	
Survival input power	+15 dBm	
Return loss S_{11}	15 dB	10 dB
Return loss S_{22}	15 dB	10 dB
<i>Harmonics (at +4 dBm output power)</i>	<i>30 dBc typical</i>	
<i>Impedance</i>	<i>50 Ω nominal</i>	
<i>Reverse isolation</i>	<i>50 dB typical</i>	
<i>Third Order Intercept (TOI)</i>	<i>+23 dBm typical</i>	
<i>Power dissipation</i>	<i>2.1 W typical</i>	

Table 2-1 87405C specifications (continued)

Specification	87405C
Bias voltage	+15V ±6% Vdc at 140 mA nominal -15V ±6% Vdc at 3 mA nominal
Connectors:	
- RF	Type N(f) in, N(m) out
- DC	Probe power connector (f)

Physical specifications

Table 2-2 87405C physical specifications

Weight	0.22 kg (0.485 lb)
Dimensions:	
- Length	98.3 mm (0.709 inch)
- Height	40.3 mm (1.587 inch)

Environmental Specifications

The 87405C is designed to fully comply with Keysight Technologies's product operating environment specifications. The following table shows the summarized environmental specifications for this product.

Table 2-3 87405C environmental specifications

Temperature	–45 °C to +55 °C
– Operating	–65 °C to +85 °C
– Storage	–65 °C to +85 °C, 10 cycles at 20 °C per minute, 20 minutes dwell time
– Cycling	per MIL-STD-883F, Method 1010.8, Condition C (modified)
Vibration	
– Broadband	50 to 2000 Hz, 7.0 G rms, 15 minutes, per MIL-STD-883F, Method 2026-1 (modified)
– Random	
Shock	
– Half-sine	1500 G @ 0.5 ms, 3 shock pulses per orientation, 18 total per
– Smoothed	MIL-STD-883F, Method 2002.4, Condition B (modified)
Humidity	
– Operating	50% to 95% Relative Humidity (RH) at 40 °C, 24 hour cycling, repeated 5 times
– Storage	90% RH at 65 °C, one 24 hour cycle
Altitude	
– Storage	<15300 m (50000 ft)
Temperature coefficient	
– Gain	–0.06 dB/°C

3 Operating Guides

Installation	20
Operating Instructions	21
Performance Tests	22
Service and Maintenance	23
Replaceable Parts	24

This chapter provides simple quick-check instructions to verify the 87405C pre-amplifier functionality prior to usage.

Installation

Initial inspection

- 1 Unpack and inspect the shipping container and its contents thoroughly to ensure that nothing was damaged during shipment. If the shipping container or cushioning material is damaged, the contents should be checked both mechanically and electrically.
 - Check for mechanical damage such as scratches or dents.
 - Procedures for checking electrical performance are given under “Operator’s check” on page 21 or “Performance Tests” on page 22.
- 2 If the contents are damaged or defective, contact your nearest Keysight Technologies Service and Support Office. Refer to “Sales and Technical Support” on page 4 of this manual. Keysight Technologies will arrange for repair or replacement of the damaged or defective equipment. Keep the shipping materials for the carrier's inspection.
- 3 If you are returning the instrument under warranty or for service, repackaging the instrument requires original shipping containers and material or their equivalents. Keysight Technologies can provide packaging materials identical to the original materials. Refer to “Sales and Technical Support” on page 4 of this manual for the Keysight Technologies nearest to you. Attach a tag indicating the type of service required, return address, model number, and serial number. Mark the container **FRAGILE** to insure careful handling. In any correspondence, refer to the instrument by model number and serial number.

Operating Instructions

Operator's check

The operator's check is supplied to allow the operator to make a quick check of the 87405C prior to usage or if a failure is suspected.

Operator's check for the S-parameter test

All four S-parameters of the pre-amplifier are measured using a network analyzer calibrated with the necessary settings applied. The equipment setup is as illustrated in [Figure 3-1](#).

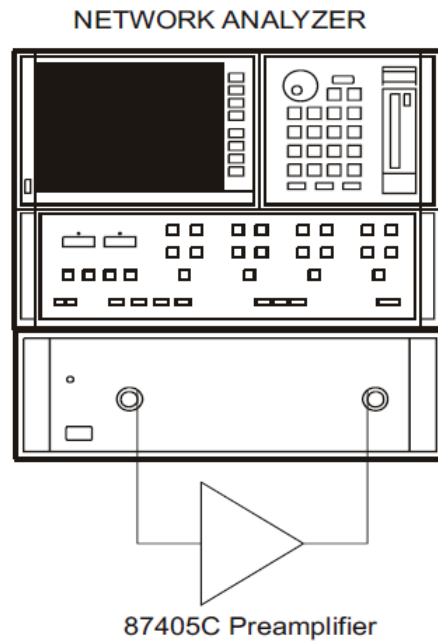


Figure 3-1 Equipment setup using network analyzer

Quick-check procedure

- 1** Calibrate the network analyzer using appropriate settings and setup if necessary.
- 2** Connect the input of the pre-amplifier to port 1 of the network analyzer and the output to port 2.
- 3** Turn on biasing to the pre-amplifier by connecting to a power supply, ± 15 V, 0.2 A.
- 4** Measure the S11 (input return loss), S22 (output return loss), and S21 (gain). Gain flatness is the difference between maximum and minimum gain values.
- 5** Compare the measurement results with the specifications in [Table 2-1](#).

Performance Tests

The pre-amplifier can be tested to the accuracy of the specifications with a network analyzer or equivalent equipment of suitable accuracy. If a network analyzer is available, test the pre-amplifier using the procedure in the analyzer's operating manual.

Service and Maintenance

Service

The 87405C does not have internal adjustments and should not be opened; it should only be repaired by service-trained personnel. Should it become necessary to return the 87405C for repair or service, contact your nearest Keysight Sales and Service Center.

Maintenance

The connectors of the 87405C, particularly the connector faces must be kept clean. Keysight recommends that the connectors be periodically inspected and cleaned if necessary. For instructions on the connection and maintenance of your connectors, refer to the Connector Care Quick Reference Card (08510-90360).

Replaceable Parts

Table 3-1 lists the replaceable parts for the 87405C pre-amplifier.

Table 3-1 Replaceable parts for the 87405C

Description	Keysight part number	Quantity
Cable assembly – banana plug	87405-20006	1
Cable assembly – probe power cable	87405-20007	1
Cable assembly – 15-pin	87405-20010	1

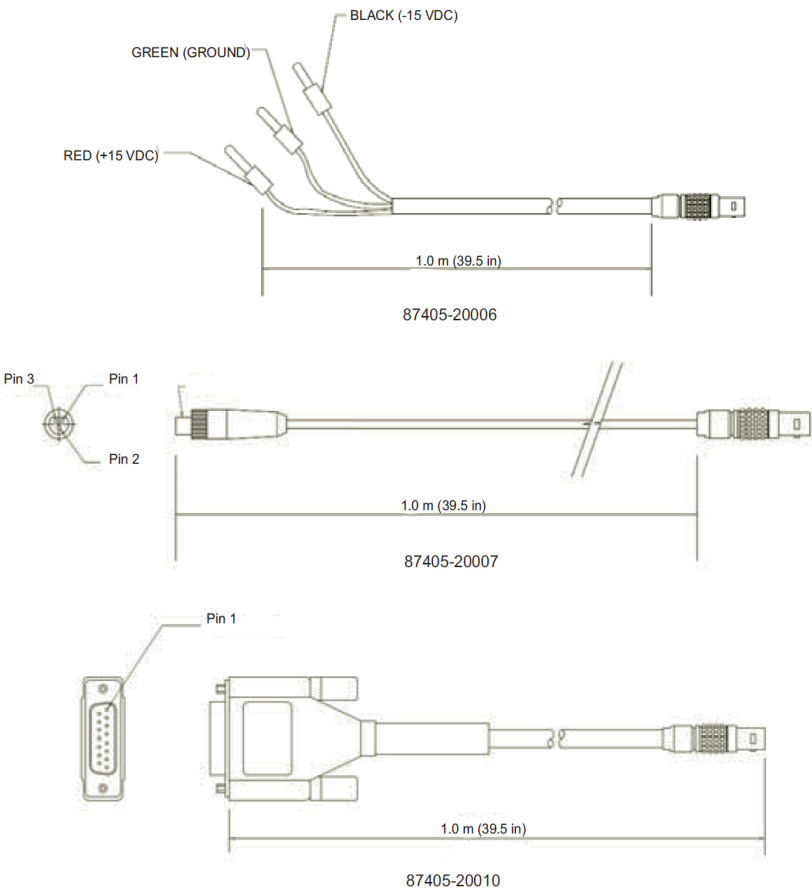


Figure 3-2 Drawings of replaceable parts for the 87405C



This information is subject to change without notice. Always refer to the English version at the Keysight website for the latest revision.

© Keysight Technologies 2006 - 2015
Edition 3, Aug 14, 2015

Printed in Malaysia



87405-90001

www.keysight.com